



TECHNICAL DATA

WPC FLOORING



TECHNICAL DATA

WPC FLOORING

Available thickness

Overall thickness 5.5-12mm

Classification (ISO 10874)

Wearlayer Utility Class


0.3mm



0.5mm



Constructure

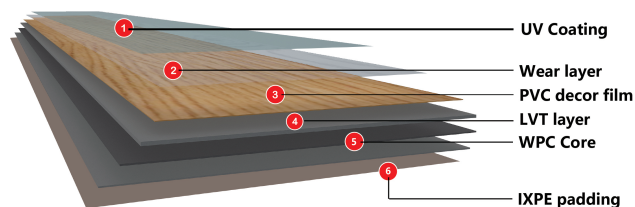

	Property	Test Method Standard	Review in Accordance with Standard
	UNILIN or VALINGE -CLICK system	-	Simple and fast installation
	Formaldehyde emission	EN 717-1	E1
	Reaction to fire	EN 13501-1	Bfl-s1
	Slip resistance	DIN 51130	R9/R10
	Slip resistance	EN 13893	DS
	Wear resistance	EN 660-2	GroupT
	Resistance to staining	ISO 26987	Index 0 Not affected
	Light stability	ISO 105-B02	≥6
	Residual indentation	ISO 24343-1	~ 0.03 mm
	Castor chair	ISO 4918	Pass



TECHNICAL DATA

WPC FLOORING

Property	Test Method Standard	Review in Accordance with Standard
Phthalate content	EN 14372	Pass
 VOC emissions	ISO 16000 parts-3,-6,-9,11	A+
 CE	-	Certified
 UKCA	-	Certified
 EPD	-	Certified
 Floorscore	-	Certified
Indoor Air Comfort Gold	-	Certified
 TUV Profi Cert.	-	Certified
Utilization	-	Recyclable

