
WALKER ZANGER®

PIETRA GRIS
4″ x 16″ Field

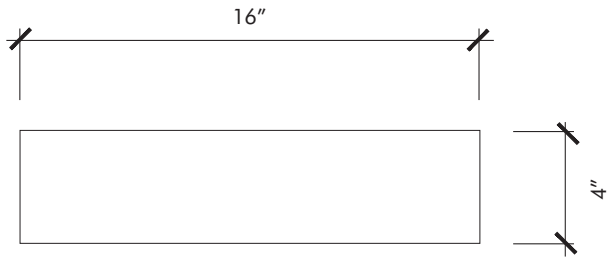

Material	Stone
Finish	Natural
Thickness	3/8″
Cut and Fill Size	3 9/10″ x 15 9/10″
Square Feet/Piece	0.4371
Mounting	Loose

Available Colors
Light Grey

Usage

Commercial Interior & Exterior Wall & Floor
Residential Interior & Exterior Wall & Floor
Fireplace
Shower Floor & Wall
Steam Shower Floor & Wall

Notes:

- We recommend sealing all natural stone products with a penetrating sealer and sealing all porous non-polished stone (limestone, tumbled marble, etc.) prior to grouting. This prevents grout from staining or affecting the color of the stone. Stone is a natural product, and care should be taken to protect it from harsh abrasive cleaners and abrasive cleaning tools.
- White thin-set or mortar is required: light limestones, tumbled stones, "antiqued stones", and light colored marbles.
- Likely identified with dry seams, pits, fossils and glass veins that are often filled at the factory. The fill may perhaps leak through the voids. In this case, refilling these voids may be a necessary maintenance procedure.

Material Data


MEDIUM	Color Variation
	Frost Resistant

Sealing

	Sealing is required

Cleaning and Maintenance

	Damp cloth and a gentle non-acidic soap

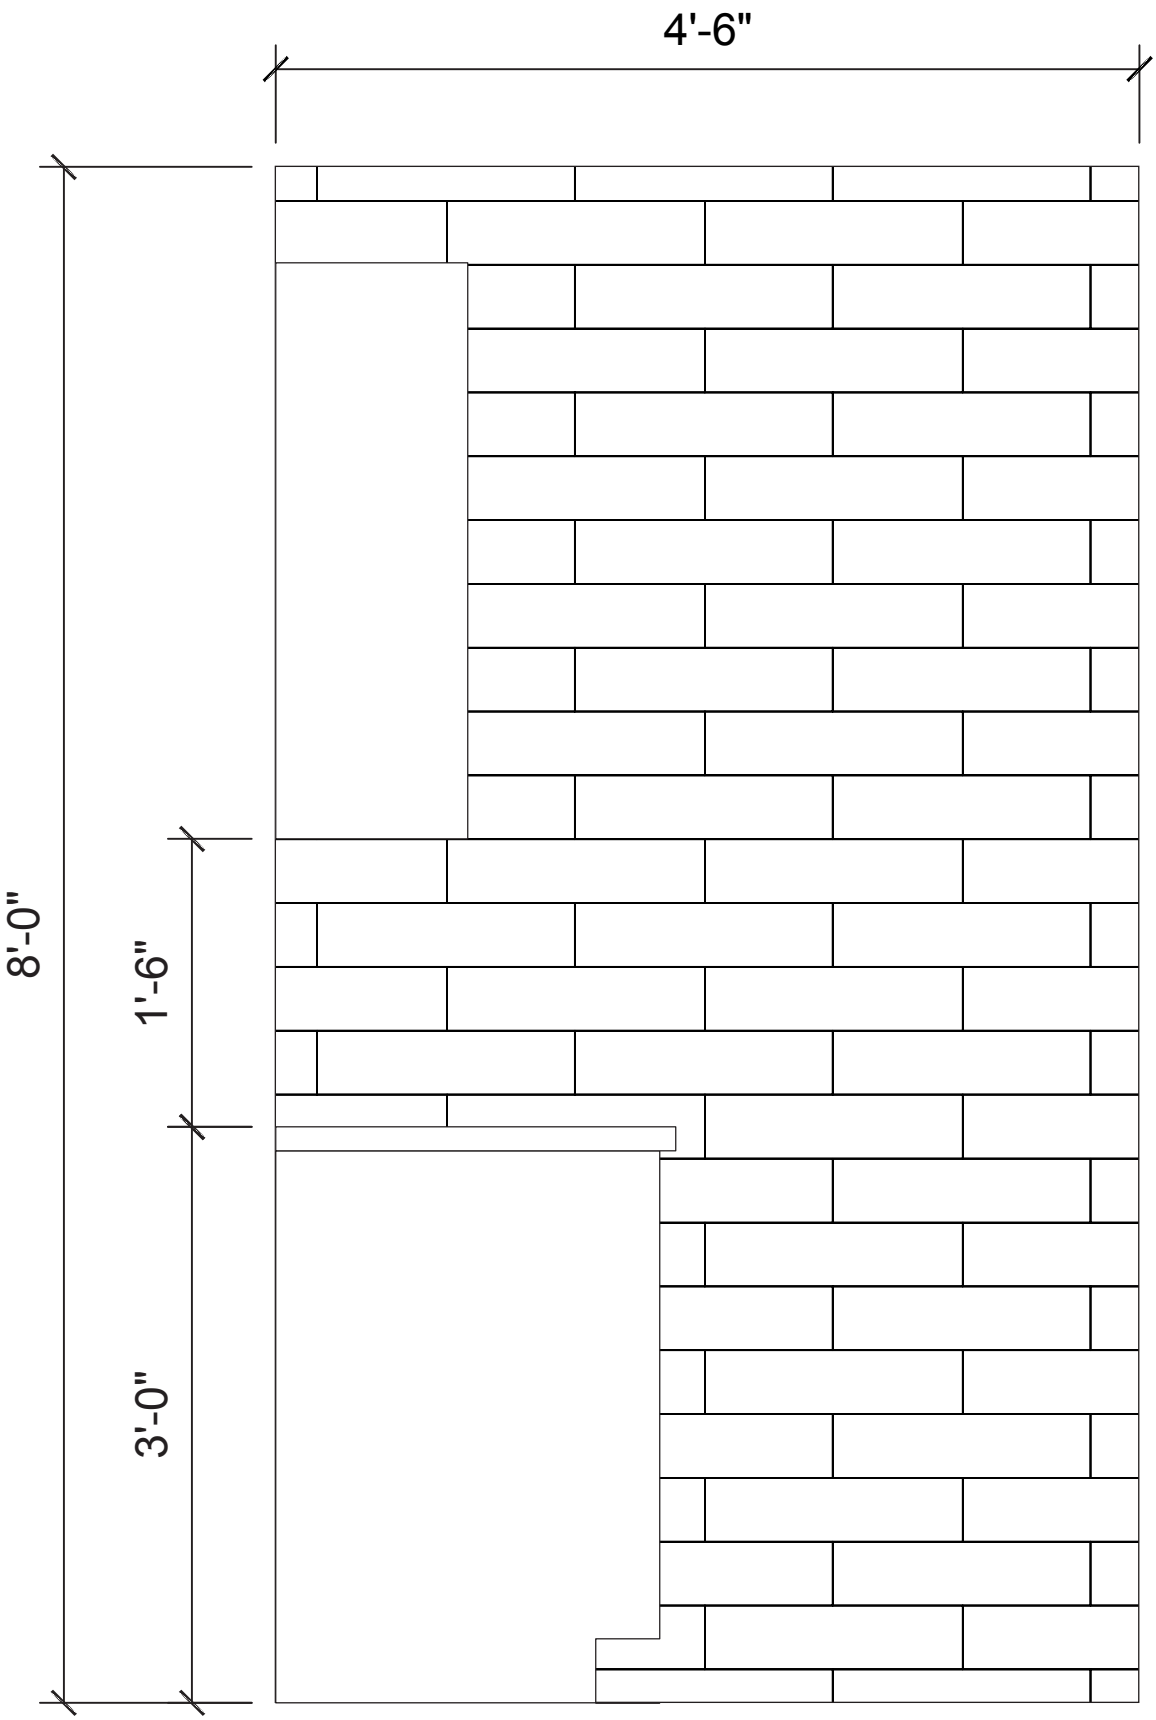


WALKER ZANGER®

Pietra Gris - 4" x 16" Field

Revised: May 2022

WALKER ZANGER®

PIETRA GRIS
12″ x 24″ Field

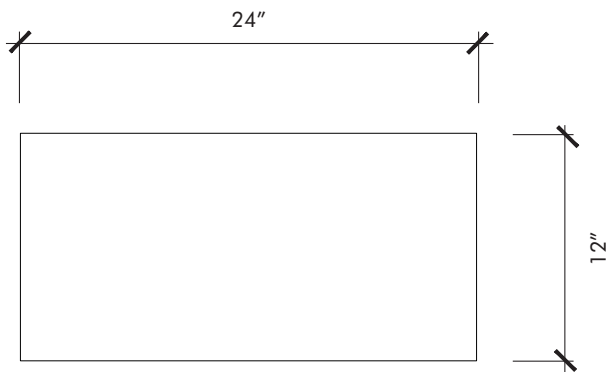

Material	Stone
Finish	Natural
Thickness	3/8″
Cut and Fill Size	12″ x 24″
Square Feet/Piece	2.0027
Mounting	Loose

Available Colors
Light Grey

Usage

Commercial Interior & Exterior Wall & Floor	
Residential Interior & Exterior Wall & Floor	
Fireplace	
Shower Floor & Wall	
Steam Shower Floor & Wall	

Notes:

- We recommend sealing all natural stone products with a penetrating sealer and sealing all porous non-polished stone (limestone, tumbled marble, etc.) prior to grouting. This prevents grout from staining or affecting the color of the stone. Stone is a natural product, and care should be taken to protect it from harsh abrasive cleaners and abrasive cleaning tools.
- White thin-set or mortar is required: light limestones, tumbled stones, “antiqued stones”, and light colored marbles.
- Likely identified with dry seams, pits, fossils and glass veins that are often filled at the factory. The fill may perhaps leak through the voids. In this case, refilling these voids may be a necessary maintenance procedure.

Material Data


MEDIUM	Color Variation
	Frost Resistant

Sealing

	Sealing is required

Cleaning and Maintenance

	Damp cloth and a gentle non-acidic soap

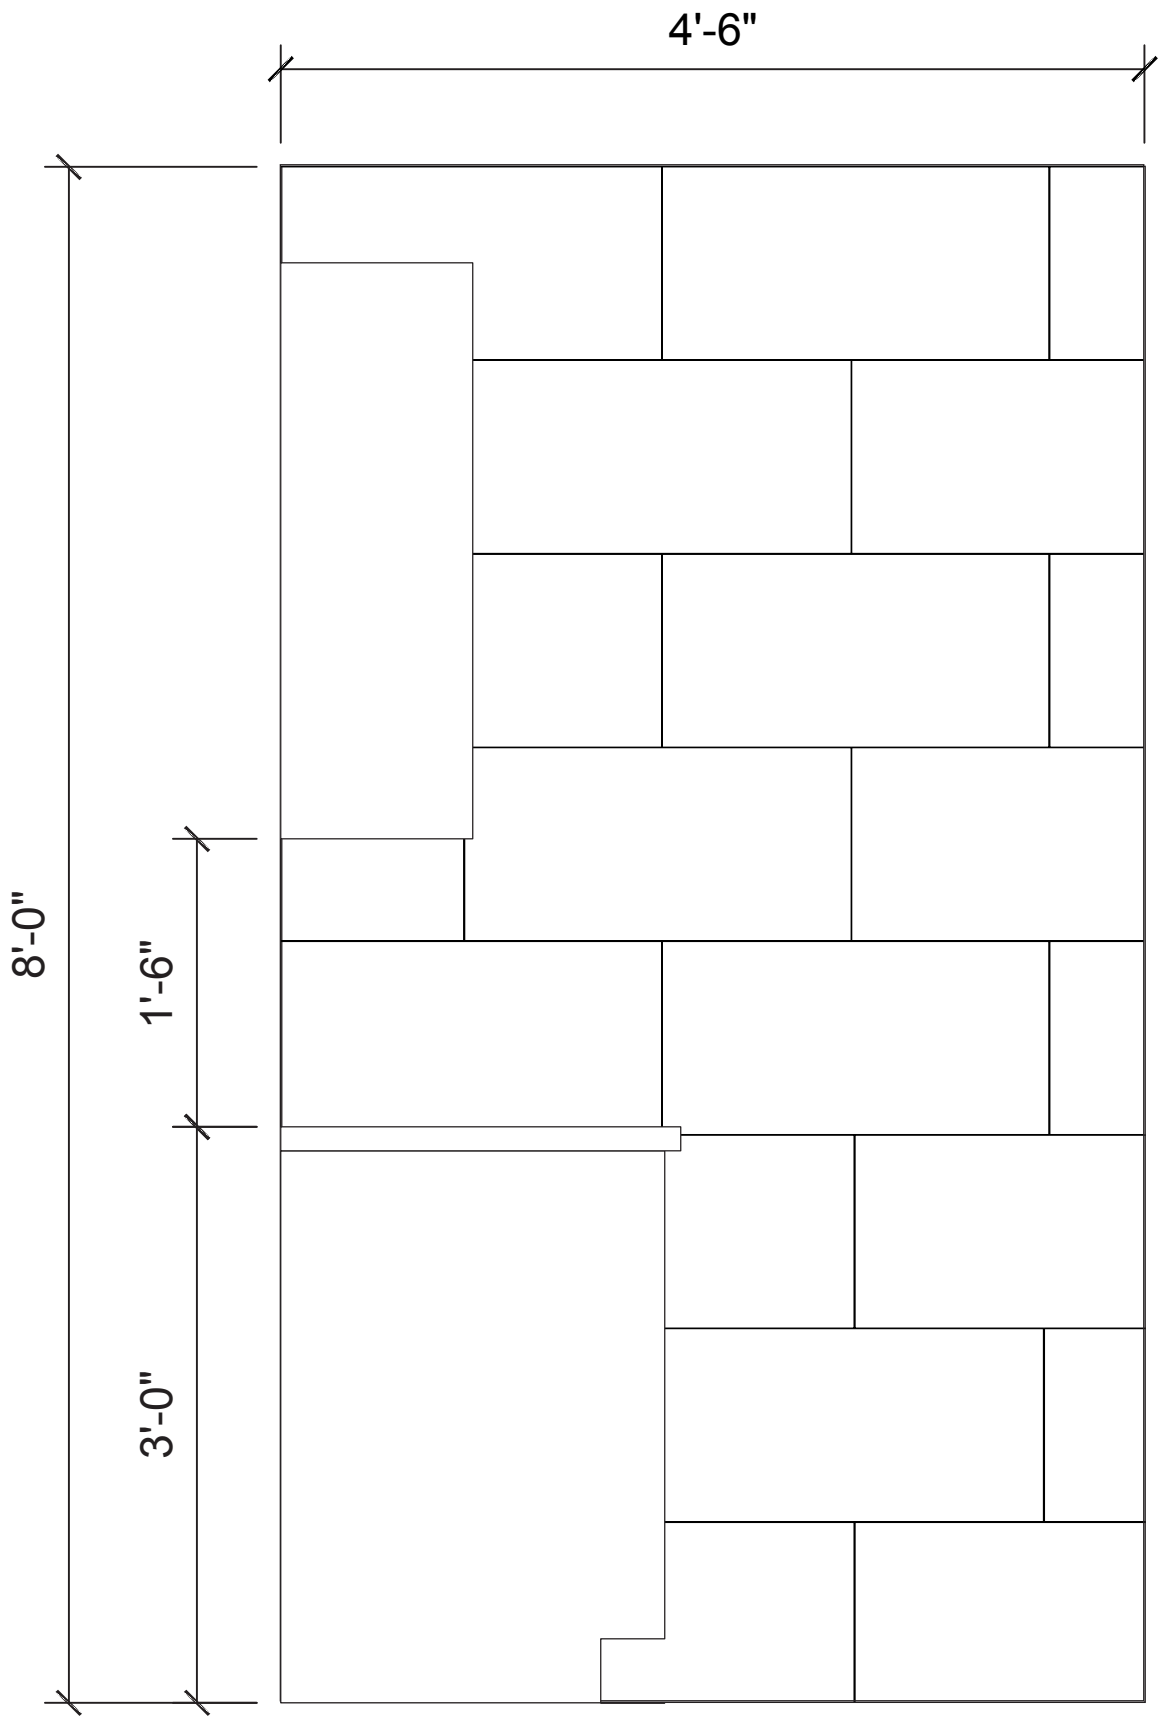


WALKER ZANGER®

Pietra Gris - 12" x 24" Field

Revised: May 2022

WALKER ZANGER®

PIETRA GRIS
Penny Round Mosaic

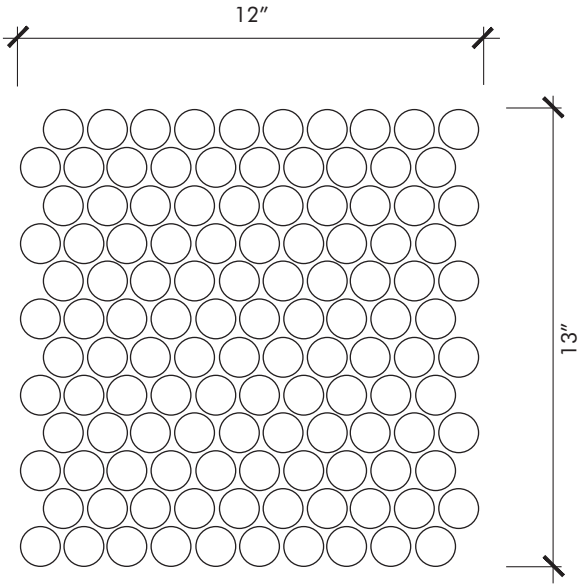

Material	Stone
Finish	Natural
Thickness	3/8″
Cut and Fill Size	12 1/10″ x 12 3/5″
Square Feet/Piece	1.0676
Mounting	Mesh

Available Colors
Light Grey

Usage

	Commercial Interior & Exterior Wall & Floor
	Residential Interior & Exterior Wall & Floor
	Fireplace
	Shower Floor & Wall
	Steam Shower Floor & Wall

Notes:

- We recommend sealing all natural stone products with a penetrating sealer and sealing all porous non-polished stone (limestone, tumbled marble, etc.) prior to grouting. This prevents grout from staining or affecting the color of the stone. Stone is a natural product, and care should be taken to protect it from harsh abrasive cleaners and abrasive cleaning tools.
- White thin-set or mortar is required: light limestones, tumbled stones, "antiqued stones", and light colored marbles.
- Likely identified with dry seams, pits, fossils and glass veins that are often filled at the factory. The fill may perhaps leak through the voids. In this case, refilling these voids may be a necessary maintenance procedure.

Material Data

MEDIUM	Color Variation
	Frost Resistant


Sealing

	Sealing is required

Cleaning and Maintenance

	Damp cloth and a gentle non-acidic soap

Revised: May 2022

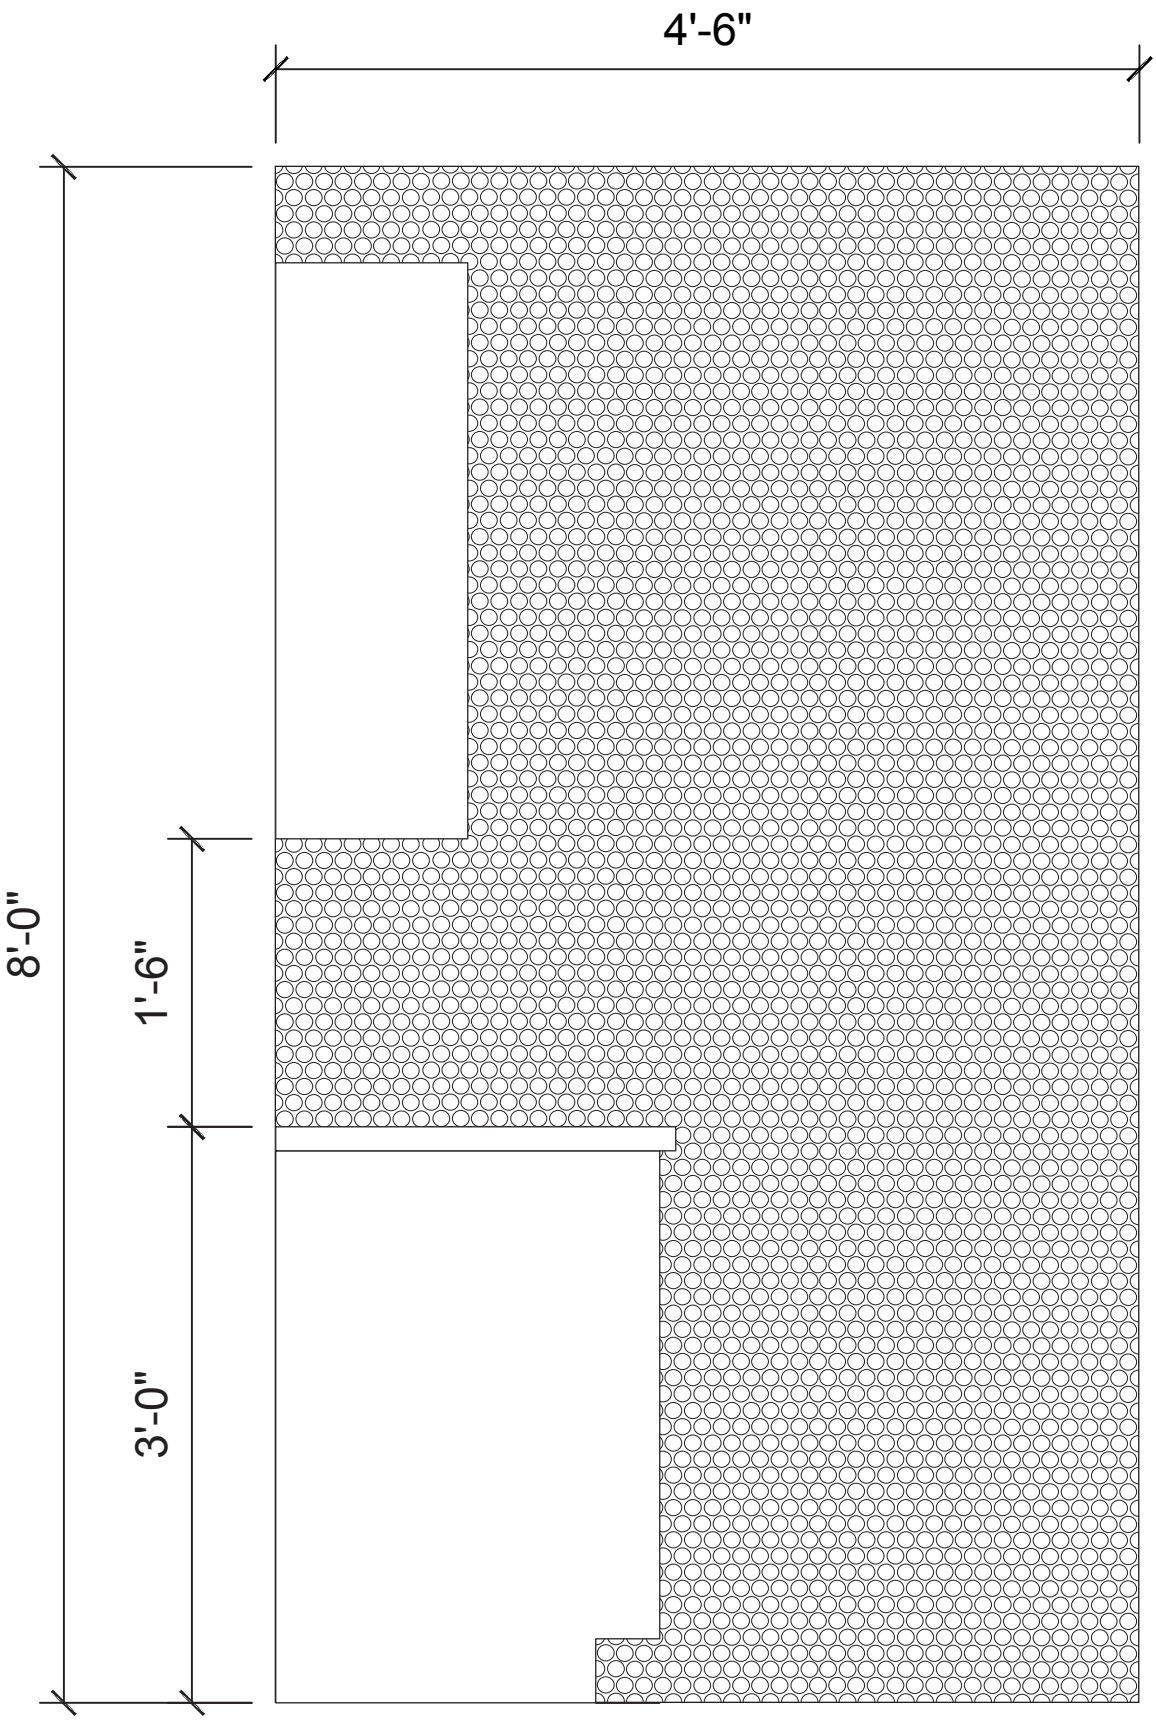


WALKER ZANGER®

Pietra Gris - Penny Round Mosaic

Revised: May 2022

WALKER ZANGER®

PIETRA GRIS
Pantheon Mosaic

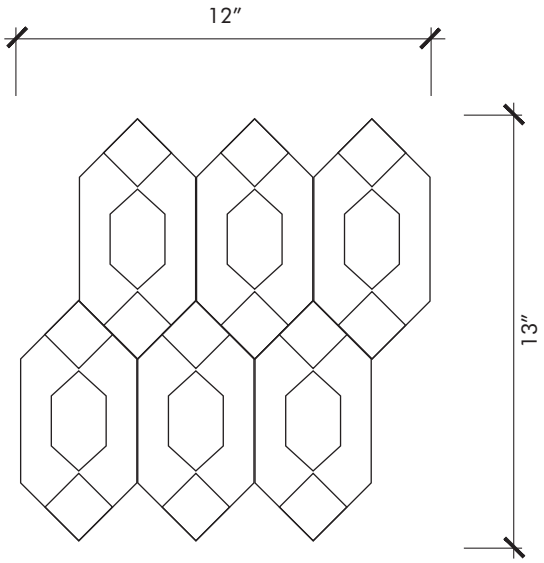

Material	Stone
Finish	Natural
Thickness	3/8″
Cut and Fill Size	11 9/10″ x 12 9/10″
Square Feet/Piece	1.078
Mounting	Mesh

Available Colors
Light Grey

Usage

	Commercial Interior & Exterior Wall & Floor
	Residential Interior & Exterior Wall & Floor
	Fireplace
	Shower Floor & Wall
	Steam Shower Floor & Wall

Notes:

- We recommend sealing all natural stone products with a penetrating sealer and sealing all porous non-polished stone (limestone, tumbled marble, etc.) prior to grouting. This prevents grout from staining or affecting the color of the stone. Stone is a natural product, and care should be taken to protect it from harsh abrasive cleaners and abrasive cleaning tools.
- White thin-set or mortar is required: light limestones, tumbled stones, "antiqued stones", and light colored marbles.
- Likely identified with dry seams, pits, fossils and glass veins that are often filled at the factory. The fill may perhaps leak through the voids. In this case, refilling these voids may be a necessary maintenance procedure.

Material Data


	Color Variation
	Frost Resistant

Sealing

	Sealing is required

Cleaning and Maintenance

	Damp cloth and a gentle non-acidic soap

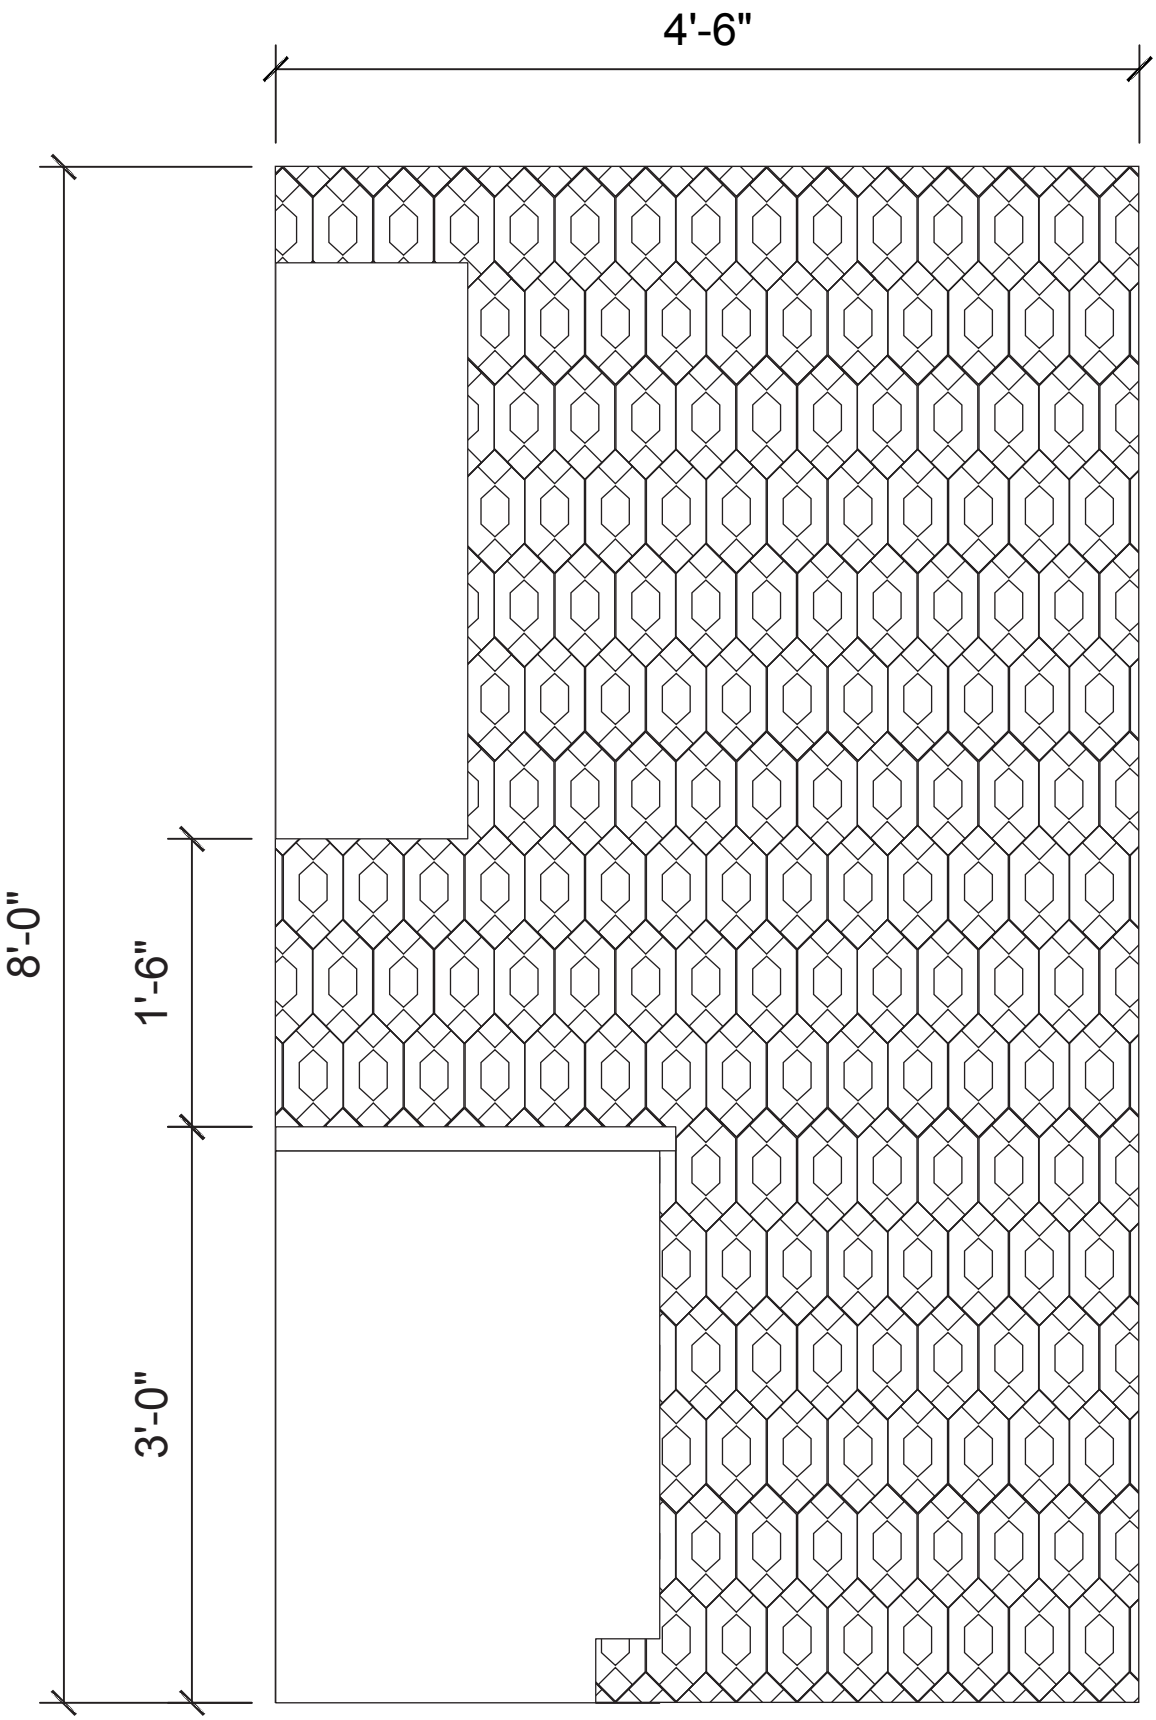


WALKER® ZANGER

Pietra Gris - Pantheon Mosaic

Revised: May 2022

WALKER ZANGER®

PIETRA GRIS
Verona Mosaic

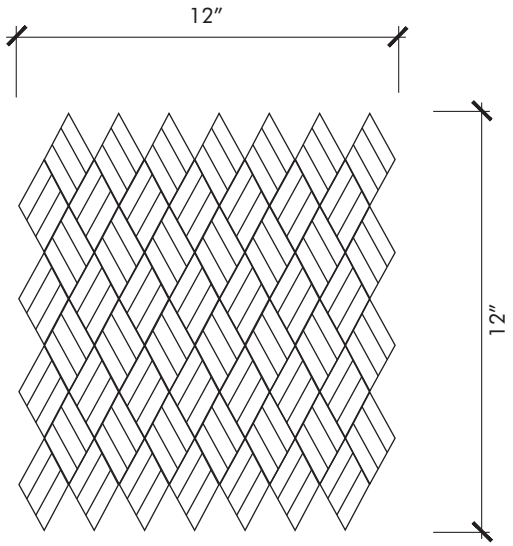

Material	Stone
Finish	Natural
Thickness	3/8″
Cut and Fill Size	12″ x 12 1/10″
Square Feet/Piece	1.0142
Mounting	Mesh

Available Colors
Light Grey

Usage

	Commercial Interior & Exterior Wall & Floor
	Residential Interior & Exterior Wall & Floor
	Fireplace
	Shower Floor & Wall
	Steam Shower Floor & Wall

Notes:

- We recommend sealing all natural stone products with a penetrating sealer and sealing all porous non-polished stone (limestone, tumbled marble, etc.) prior to grouting. This prevents grout from staining or affecting the color of the stone. Stone is a natural product, and care should be taken to protect it from harsh abrasive cleaners and abrasive cleaning tools.
- White thin-set or mortar is required: light limestones, tumbled stones, "antiqued stones", and light colored marbles.
- Likely identified with dry seams, pits, fossils and glass veins that are often filled at the factory. The fill may perhaps leak through the voids. In this case, refilling these voids may be a necessary maintenance procedure.

Material Data

MEDIUM	Color Variation
	Frost Resistant


Sealing

	Sealing is required

Cleaning and Maintenance

	Damp cloth and a gentle non-acidic soap

Revised: May 2022

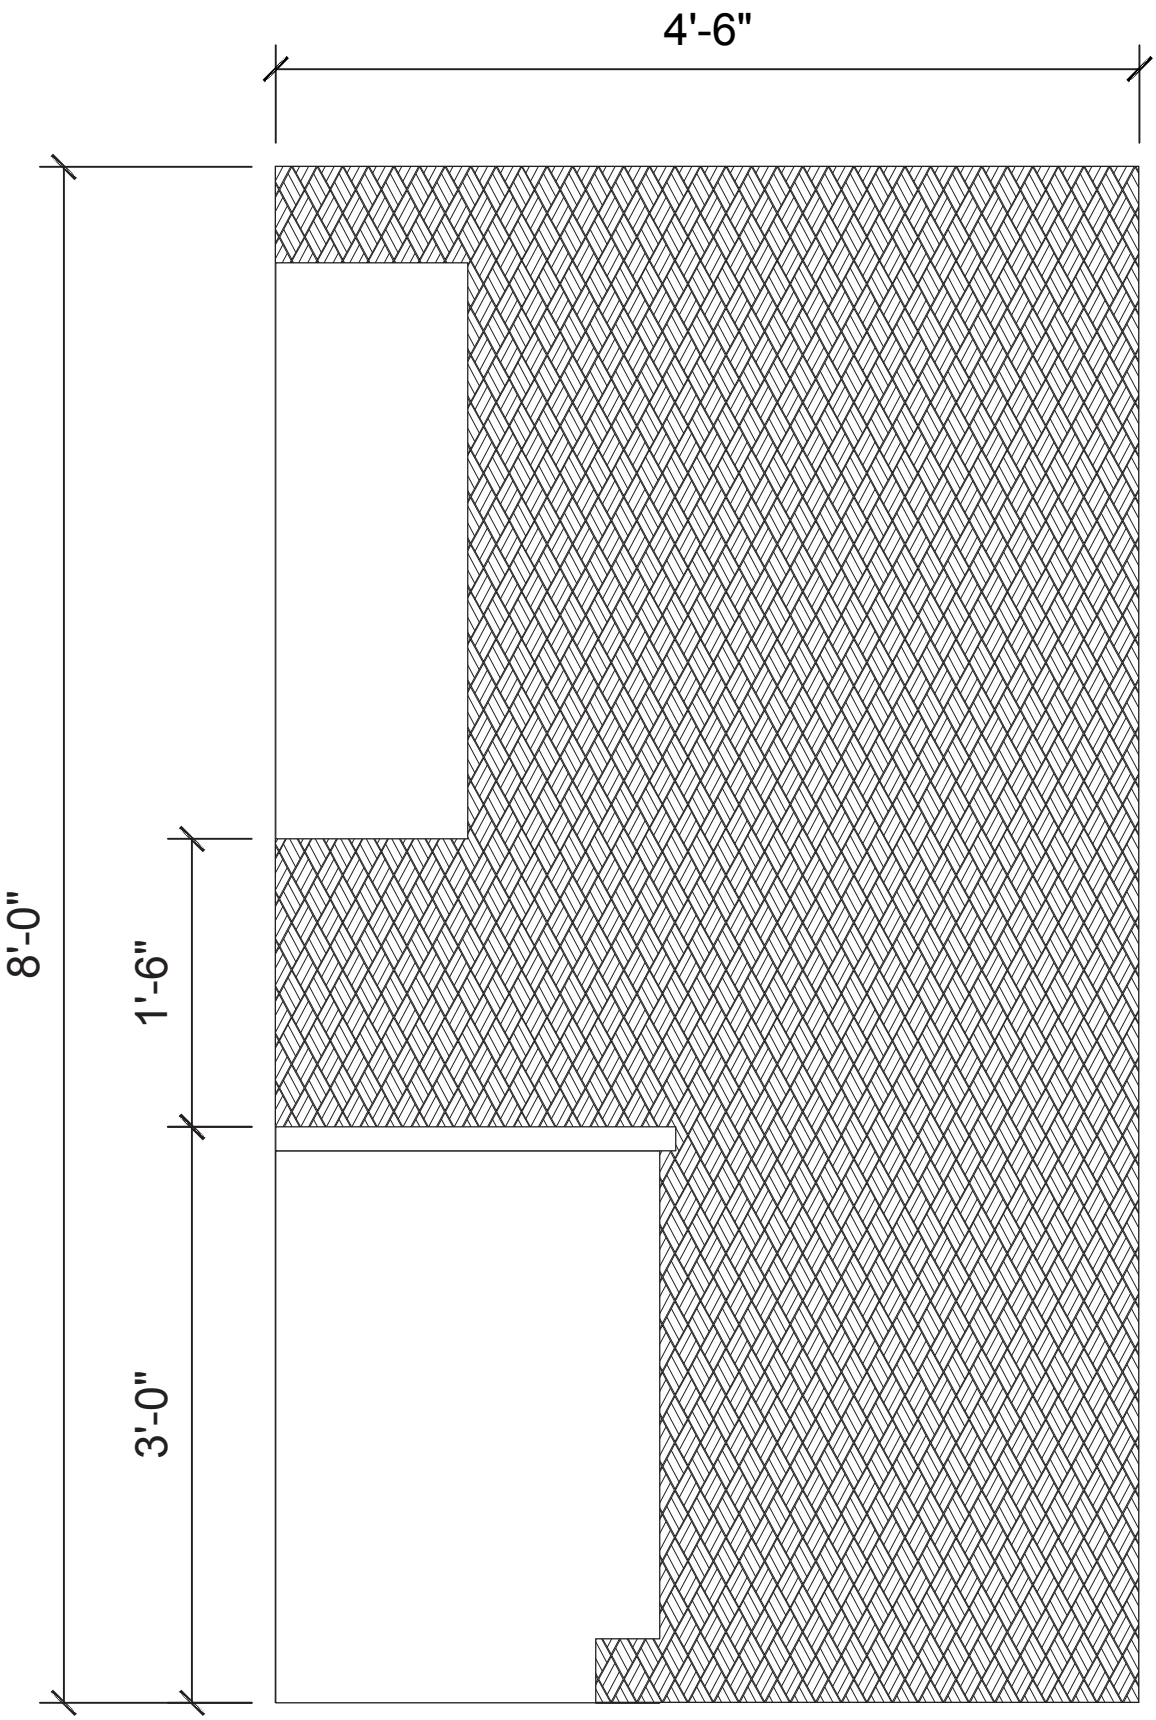


WALKER® ZANGER

Pietra Gris - Verona Mosaic

Revised: May 2022

WALKER ZANGER®

PIETRA GRIS
Tivoli Mosaic

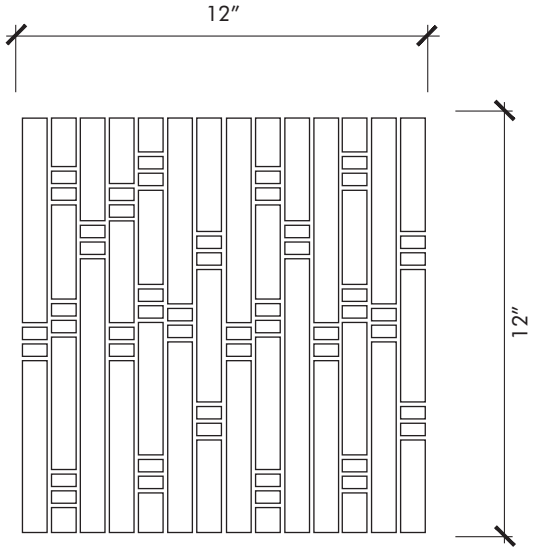

Material	Stone
Finish	Natural
Thickness	3/8″
Cut and Fill Size	12″ x 12″
Square Feet/Piece	1.0013
Mounting	Mesh

Available Colors
Light Grey

Usage

Commercial Interior & Exterior Wall & Floor
Residential Interior & Exterior Wall & Floor
Fireplace
Shower Floor & Wall
Steam Shower Floor & Wall

Notes:

- We recommend sealing all natural stone products with a penetrating sealer and sealing all porous non-polished stone (limestone, tumbled marble, etc.) prior to grouting. This prevents grout from staining or affecting the color of the stone. Stone is a natural product, and care should be taken to protect it from harsh abrasive cleaners and abrasive cleaning tools.
- White thin-set or mortar is required: light limestones, tumbled stones, "antiqued stones", and light colored marbles.
- Likely identified with dry seams, pits, fossils and glass veins that are often filled at the factory. The fill may perhaps leak through the voids. In this case, refilling these voids may be a necessary maintenance procedure.

Material Data

MEDIUM	Color Variation
	Frost Resistant


Sealing

	Sealing is required

Cleaning and Maintenance

	Damp cloth and a gentle non-acidic soap

Revised: May 2022

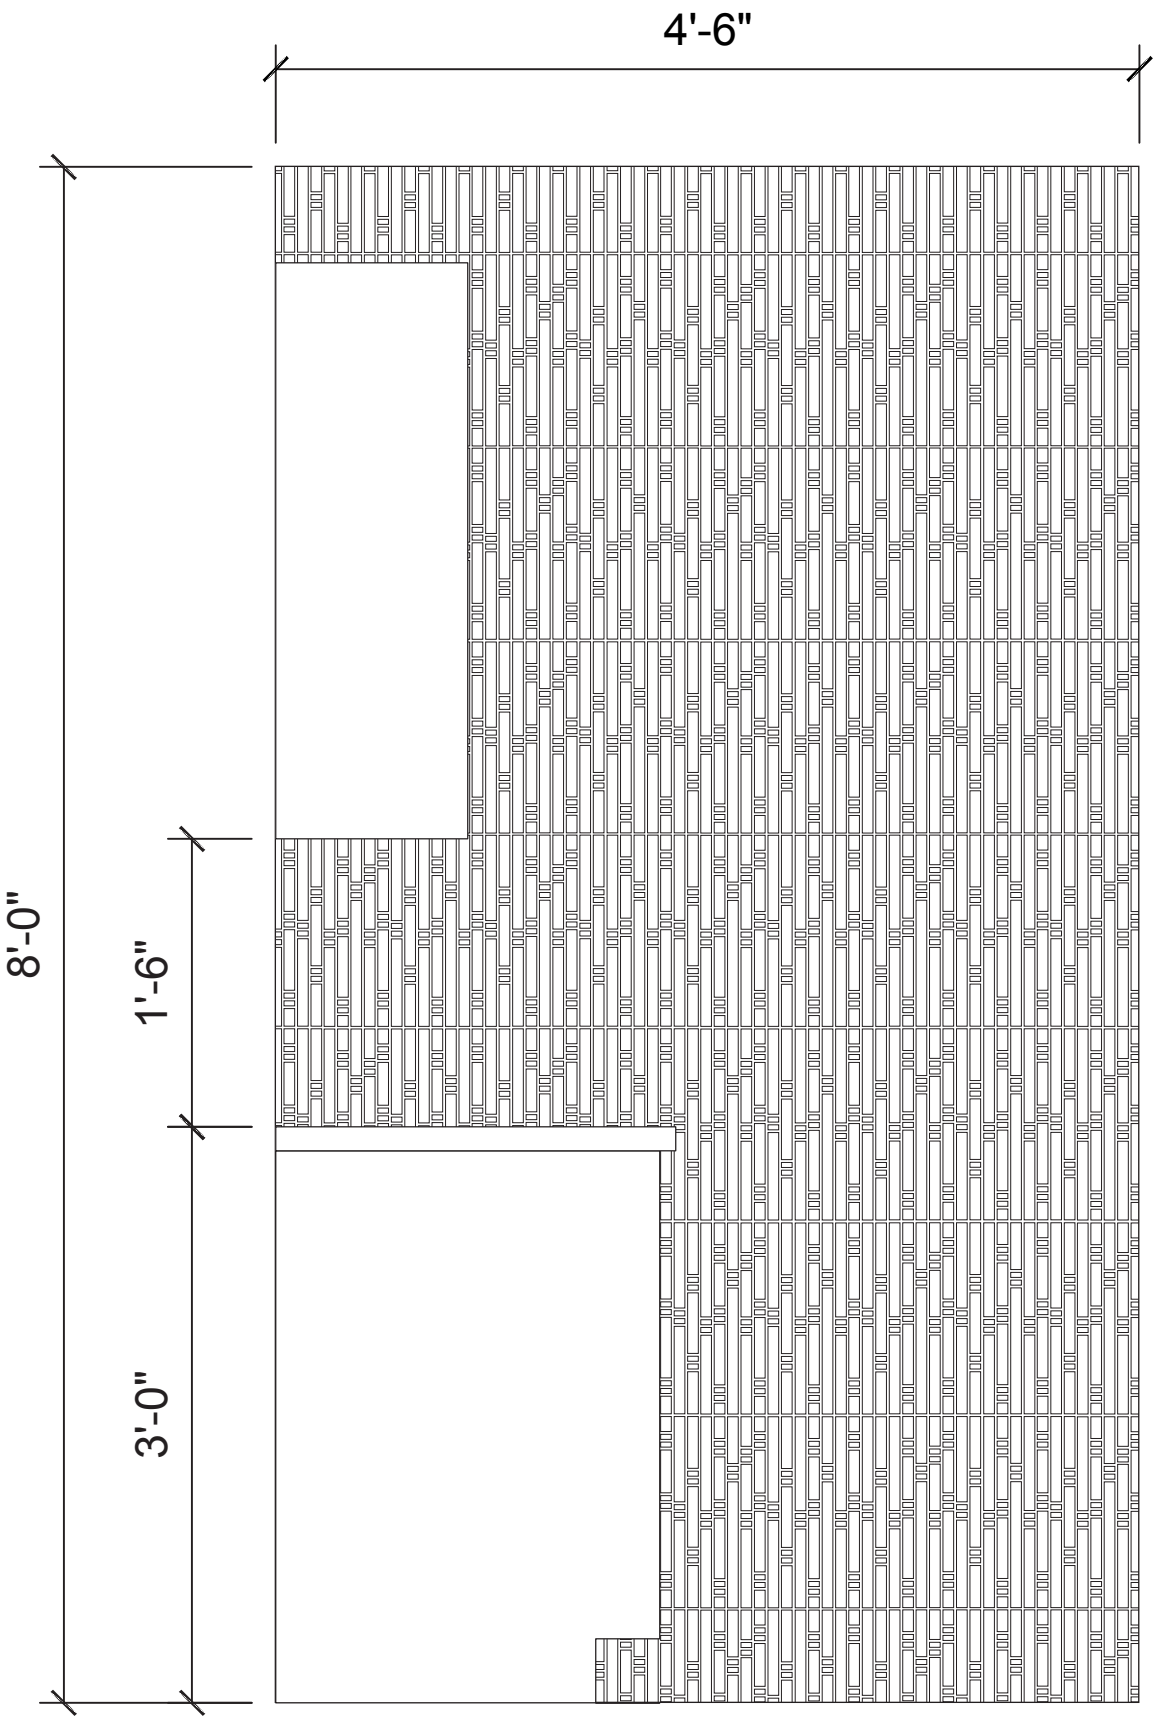


WALKER® ZANGER

Pietra Gris - Tivoli Mosaic

Revised: May 2022

WALKER ZANGER®

PIETRA GRIS
Sorrento Mosaic

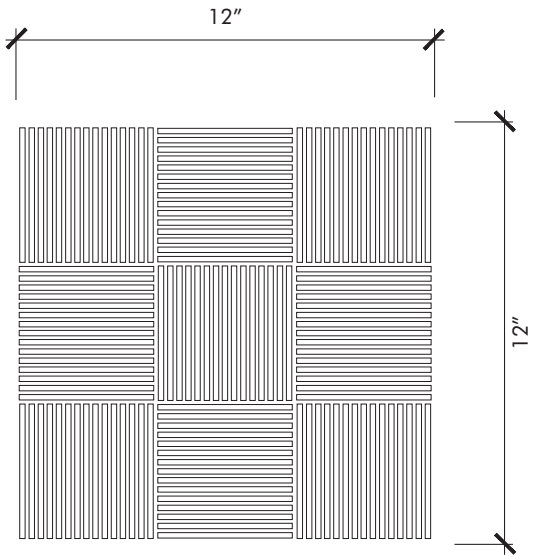

Material	Stone
Finish	Natural
Thickness	3/8″
Cut and Fill Size	11 9/10″ x 11 9/10″
Square Feet/Piece	0.9948
Mounting	Mesh

Available Colors
Light Grey

Usage

	Commercial Interior & Exterior Wall & Floor
	Residential Interior & Exterior Wall & Floor
	Fireplace
	Shower Floor & Wall
	Steam Shower Floor & Wall

Notes:

- We recommend sealing all natural stone products with a penetrating sealer and sealing all porous non-polished stone (limestone, tumbled marble, etc.) prior to grouting. This prevents grout from staining or affecting the color of the stone. Stone is a natural product, and care should be taken to protect it from harsh abrasive cleaners and abrasive cleaning tools.
- White thin-set or mortar is required: light limestones, tumbled stones, "antiqued stones", and light colored marbles.
- Likely identified with dry seams, pits, fossils and glass veins that are often filled at the factory. The fill may perhaps leak through the voids. In this case, refilling these voids may be a necessary maintenance procedure.

Material Data


	Color Variation
	Frost Resistant

Sealing

	Sealing is required

Cleaning and Maintenance

	Damp cloth and a gentle non-acidic soap

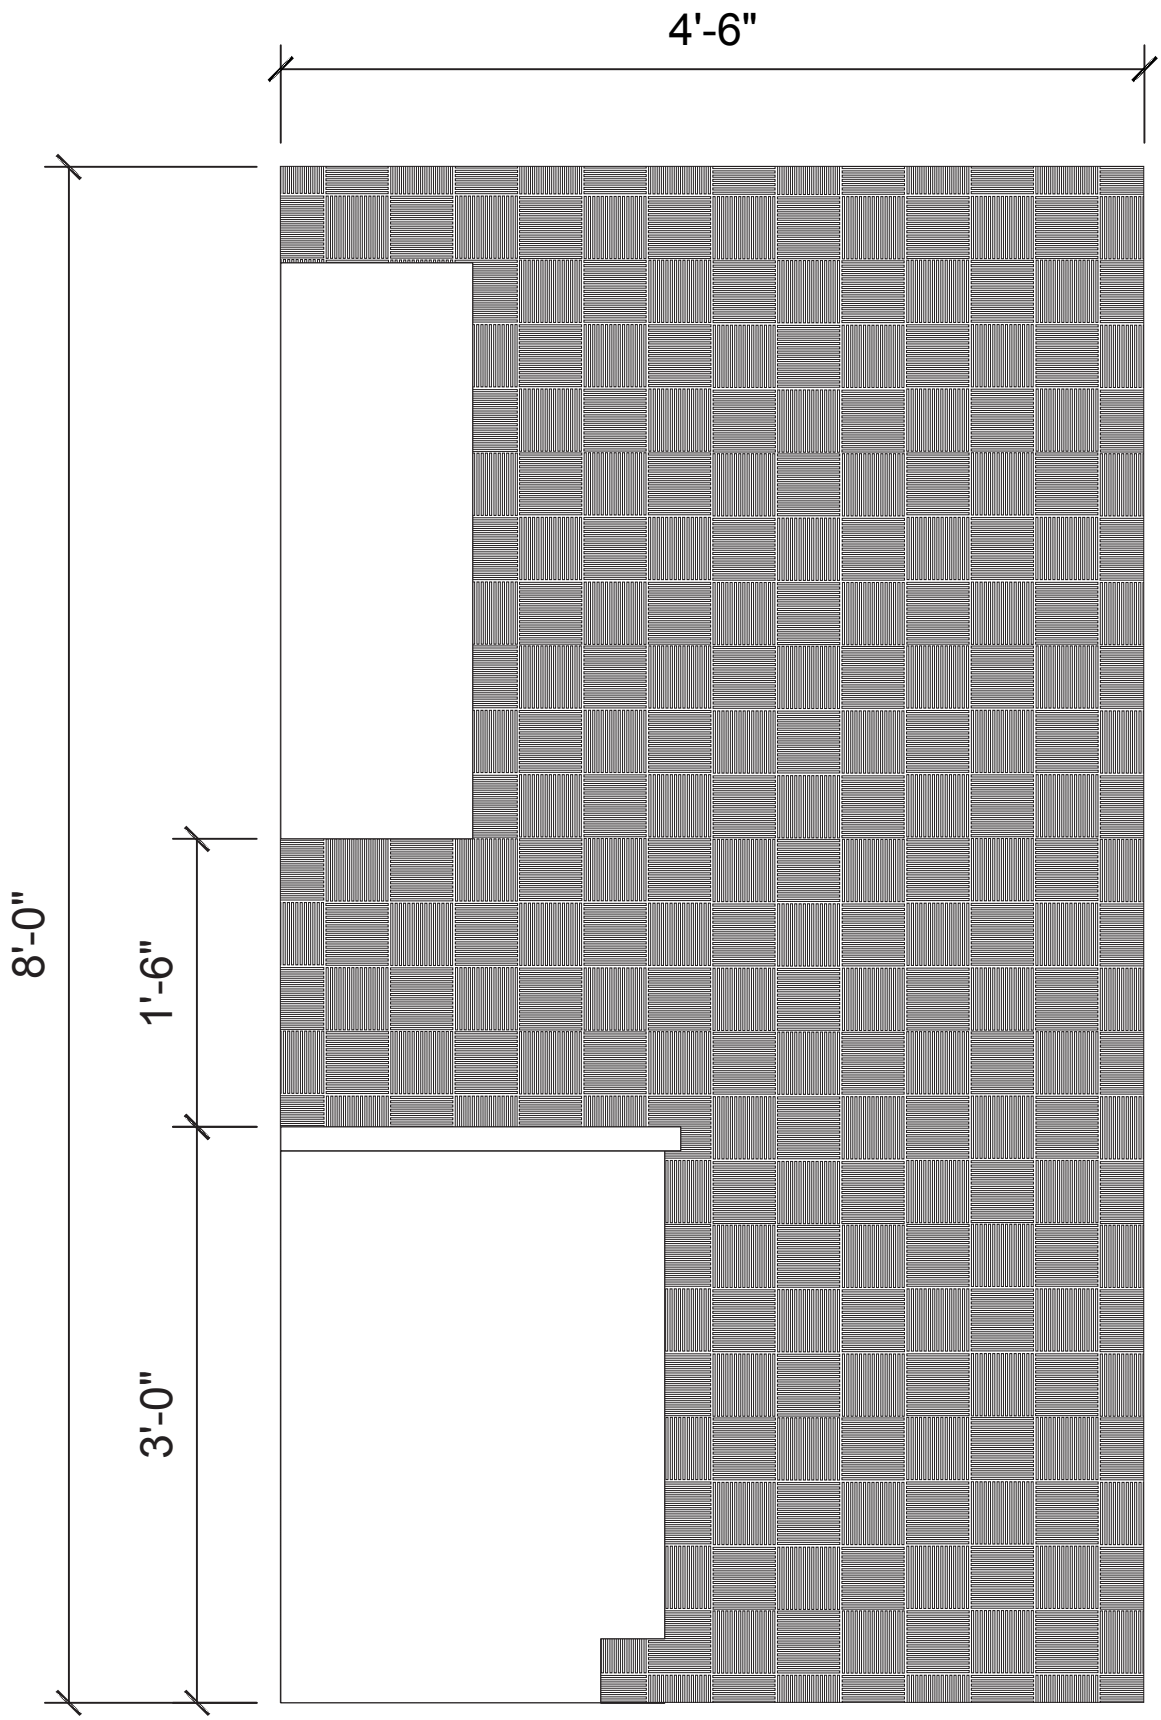


WALKER® ZANGER

Pietra Gris - Sorrento Mosaic

Revised: May 2022

WALKER ZANGER®

PIETRA GRIS
Siena Mosaic

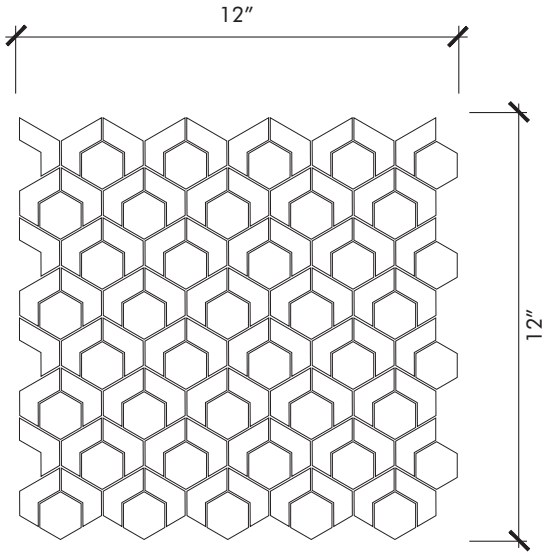

Material	Stone
Finish	Natural
Thickness	3/8″
Cut and Fill Size	11 3/10″ x 11 9/10″
Square Feet/Piece	0.9384
Mounting	Mesh

Available Colors
Light Grey

Usage

	Commercial Interior & Exterior Wall & Floor
	Residential Interior & Exterior Wall & Floor
	Fireplace
	Shower Floor & Wall
	Steam Shower Floor & Wall

Notes:

- We recommend sealing all natural stone products with a penetrating sealer and sealing all porous non-polished stone (limestone, tumbled marble, etc.) prior to grouting. This prevents grout from staining or affecting the color of the stone. Stone is a natural product, and care should be taken to protect it from harsh abrasive cleaners and abrasive cleaning tools.
- White thin-set or mortar is required: light limestones, tumbled stones, "antiqued stones", and light colored marbles.
- Likely identified with dry seams, pits, fossils and glass veins that are often filled at the factory. The fill may perhaps leak through the voids. In this case, refilling these voids may be a necessary maintenance procedure.

Material Data


MEDIUM	Color Variation
	Frost Resistant

Sealing

	Sealing is required

Cleaning and Maintenance

	Damp cloth and a gentle non-acidic soap

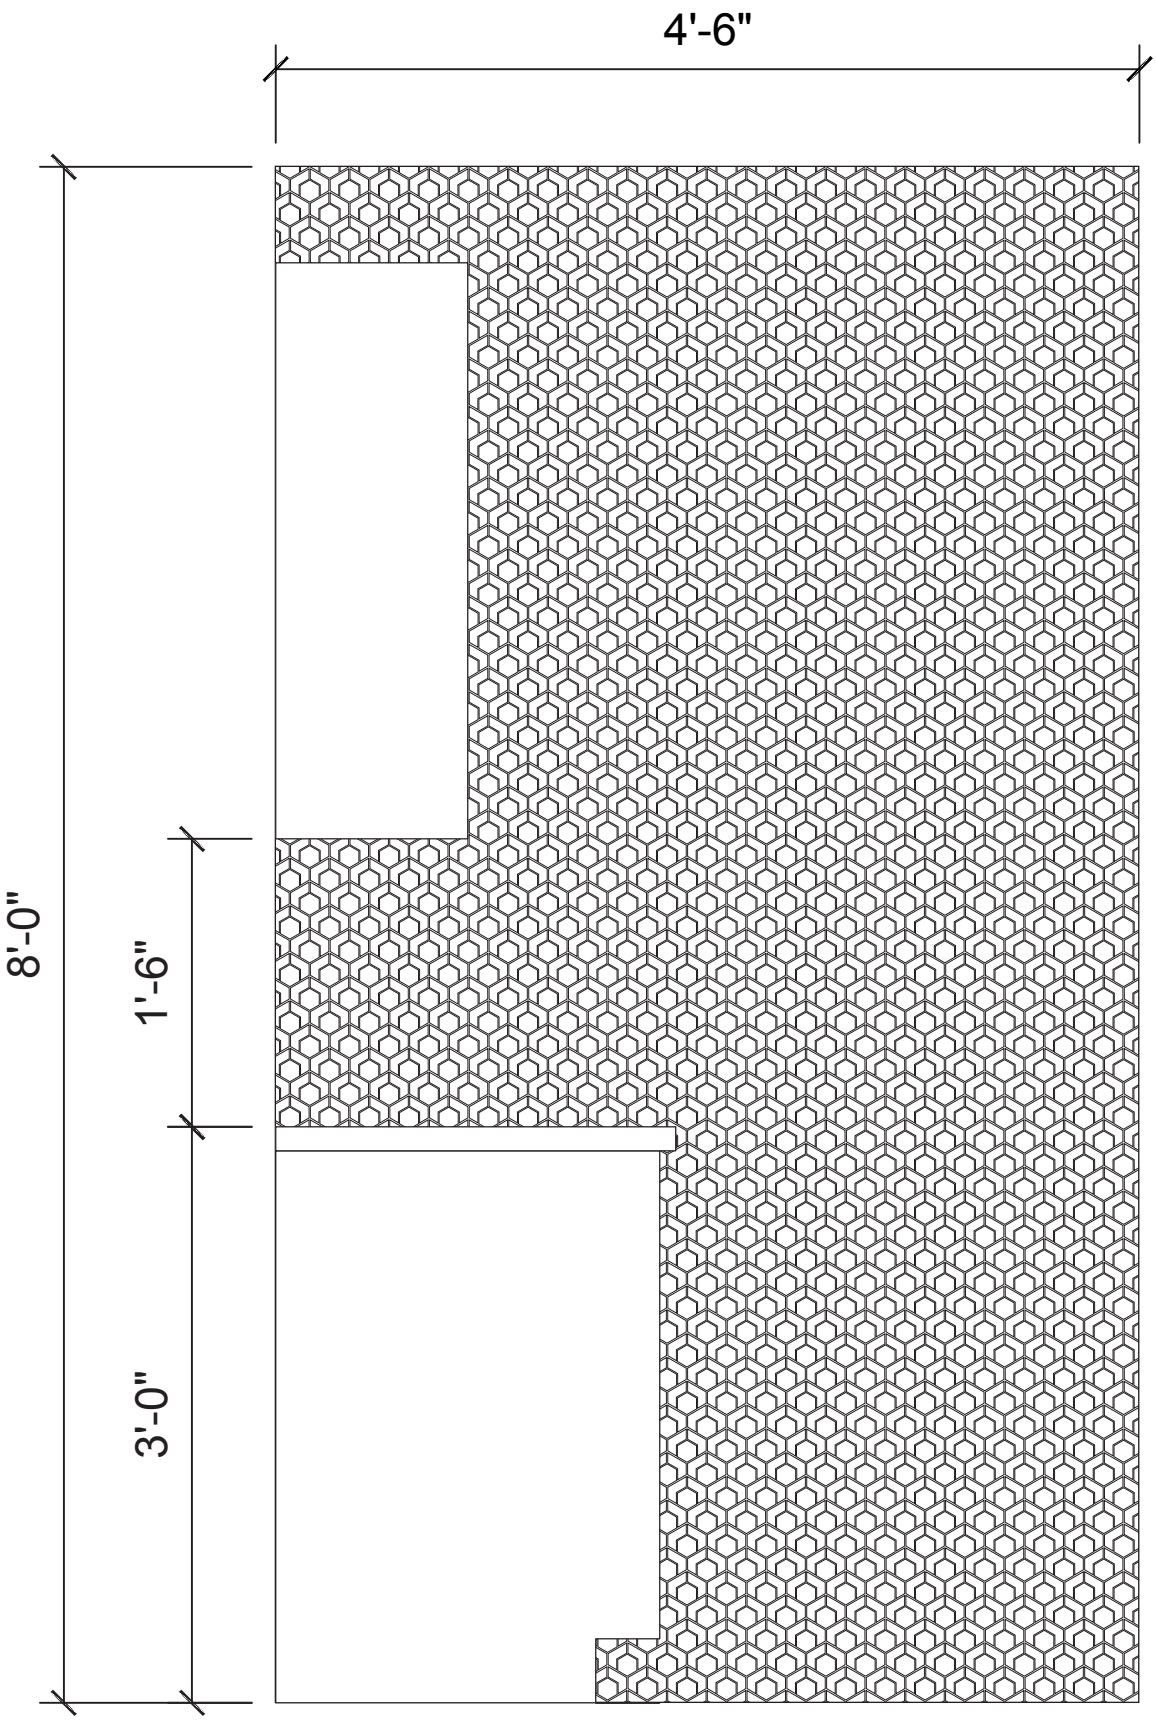


WALKER® ZANGER

Pietra Gris - Siena Mosaic

Revised: May 2022

WALKER® ZANGER

PIETRA GRIS
Pisa Mosaic

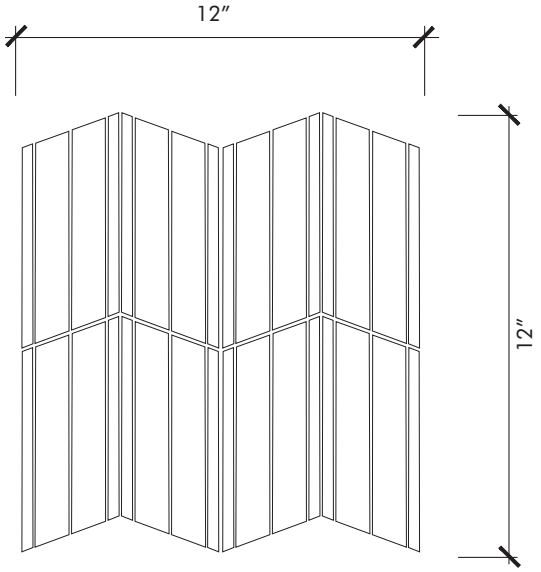

Material	Stone
Finish	Natural
Thickness	3/8″
Cut and Fill Size	11 1/2″ x 11 7/10″
Square Feet/Piece	0.9431
Mounting	Mesh

Available Colors
Light Grey

Usage

	Commercial Interior & Exterior Wall & Floor
	Residential Interior & Exterior Wall & Floor
	Fireplace
	Shower Floor & Wall
	Steam Shower Floor & Wall

Notes:

- We recommend sealing all natural stone products with a penetrating sealer and sealing all porous non-polished stone (limestone, tumbled marble, etc.) prior to grouting. This prevents grout from staining or affecting the color of the stone. Stone is a natural product, and care should be taken to protect it from harsh abrasive cleaners and abrasive cleaning tools.
- White thin-set or mortar is required: light limestones, tumbled stones, "antiqued stones", and light colored marbles.
- Likely identified with dry seams, pits, fossils and glass veins that are often filled at the factory. The fill may perhaps leak through the voids. In this case, refilling these voids may be a necessary maintenance procedure.

Material Data

MEDIUM	Color Variation
	Frost Resistant


Sealing

	Sealing is required

Cleaning and Maintenance

	Damp cloth and a gentle non-acidic soap

Revised: May 2022

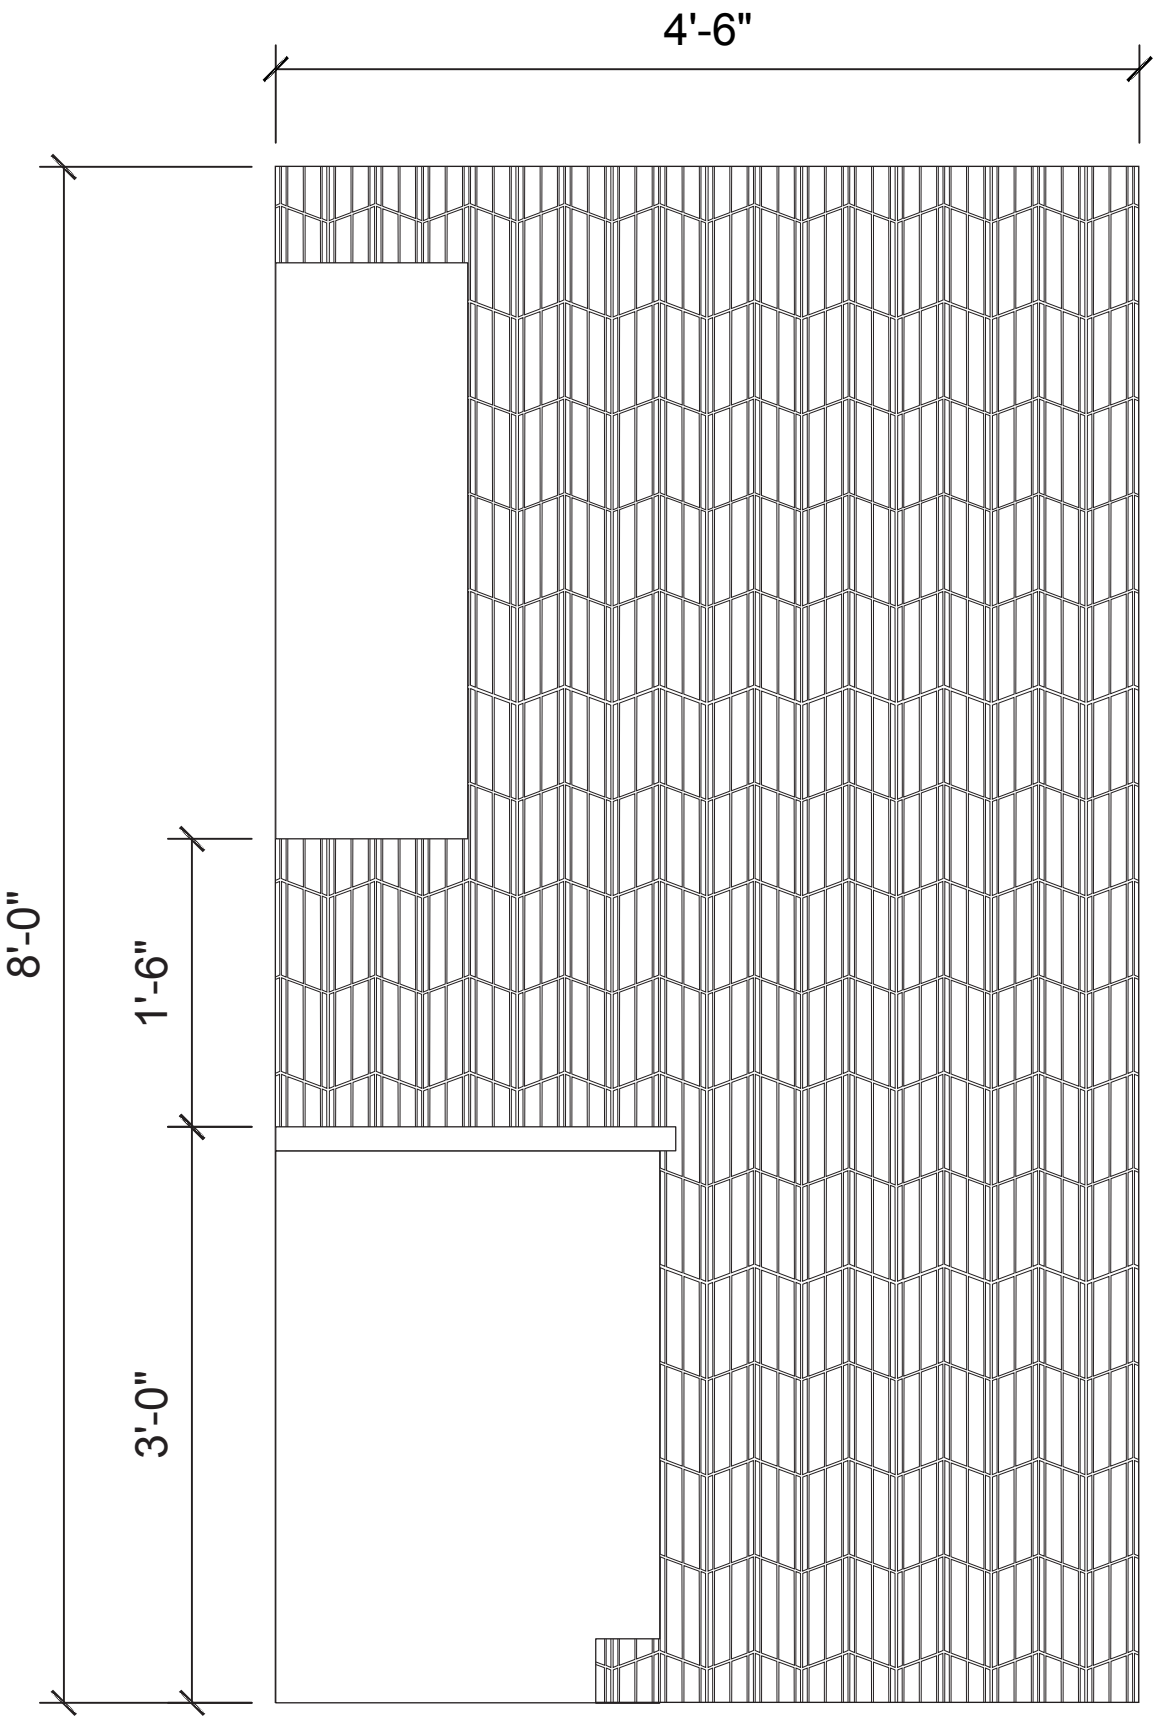


WALKER ZANGER®

Pietra Gris - Pisa Mosaic

Revised: May 2022

WALKER ZANGER®

PIETRA GRIS
Normandy Mosaic

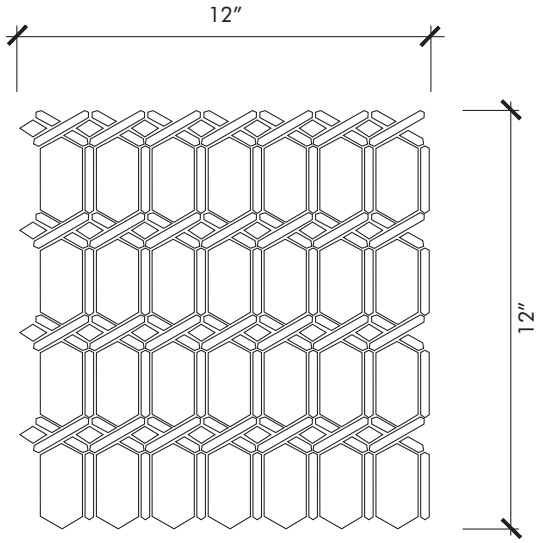

Material	Stone
Finish	Natural
Thickness	3/8″
Cut and Fill Size	11 3/5″ x 11 3/5″
Square Feet/Piece	0.9417
Mounting	Mesh

Available Colors
Light Grey

Usage

Commercial Interior & Exterior Wall & Floor	
Residential Interior & Exterior Wall & Floor	
Fireplace	
Shower Floor & Wall	
Steam Shower Floor & Wall	

Notes:

- We recommend sealing all natural stone products with a penetrating sealer and sealing all porous non-polished stone (limestone, tumbled marble, etc.) prior to grouting. This prevents grout from staining or affecting the color of the stone. Stone is a natural product, and care should be taken to protect it from harsh abrasive cleaners and abrasive cleaning tools.
- White thin-set or mortar is required: light limestones, tumbled stones, "antiqued stones", and light colored marbles.
- Likely identified with dry seams, pits, fossils and glass veins that are often filled at the factory. The fill may perhaps leak through the voids. In this case, refilling these voids may be a necessary maintenance procedure.

Material Data

MEDIUM	Color Variation
	Frost Resistant


Sealing

	Sealing is required

Cleaning and Maintenance

	Damp cloth and a gentle non-acidic soap

Revised: May 2022

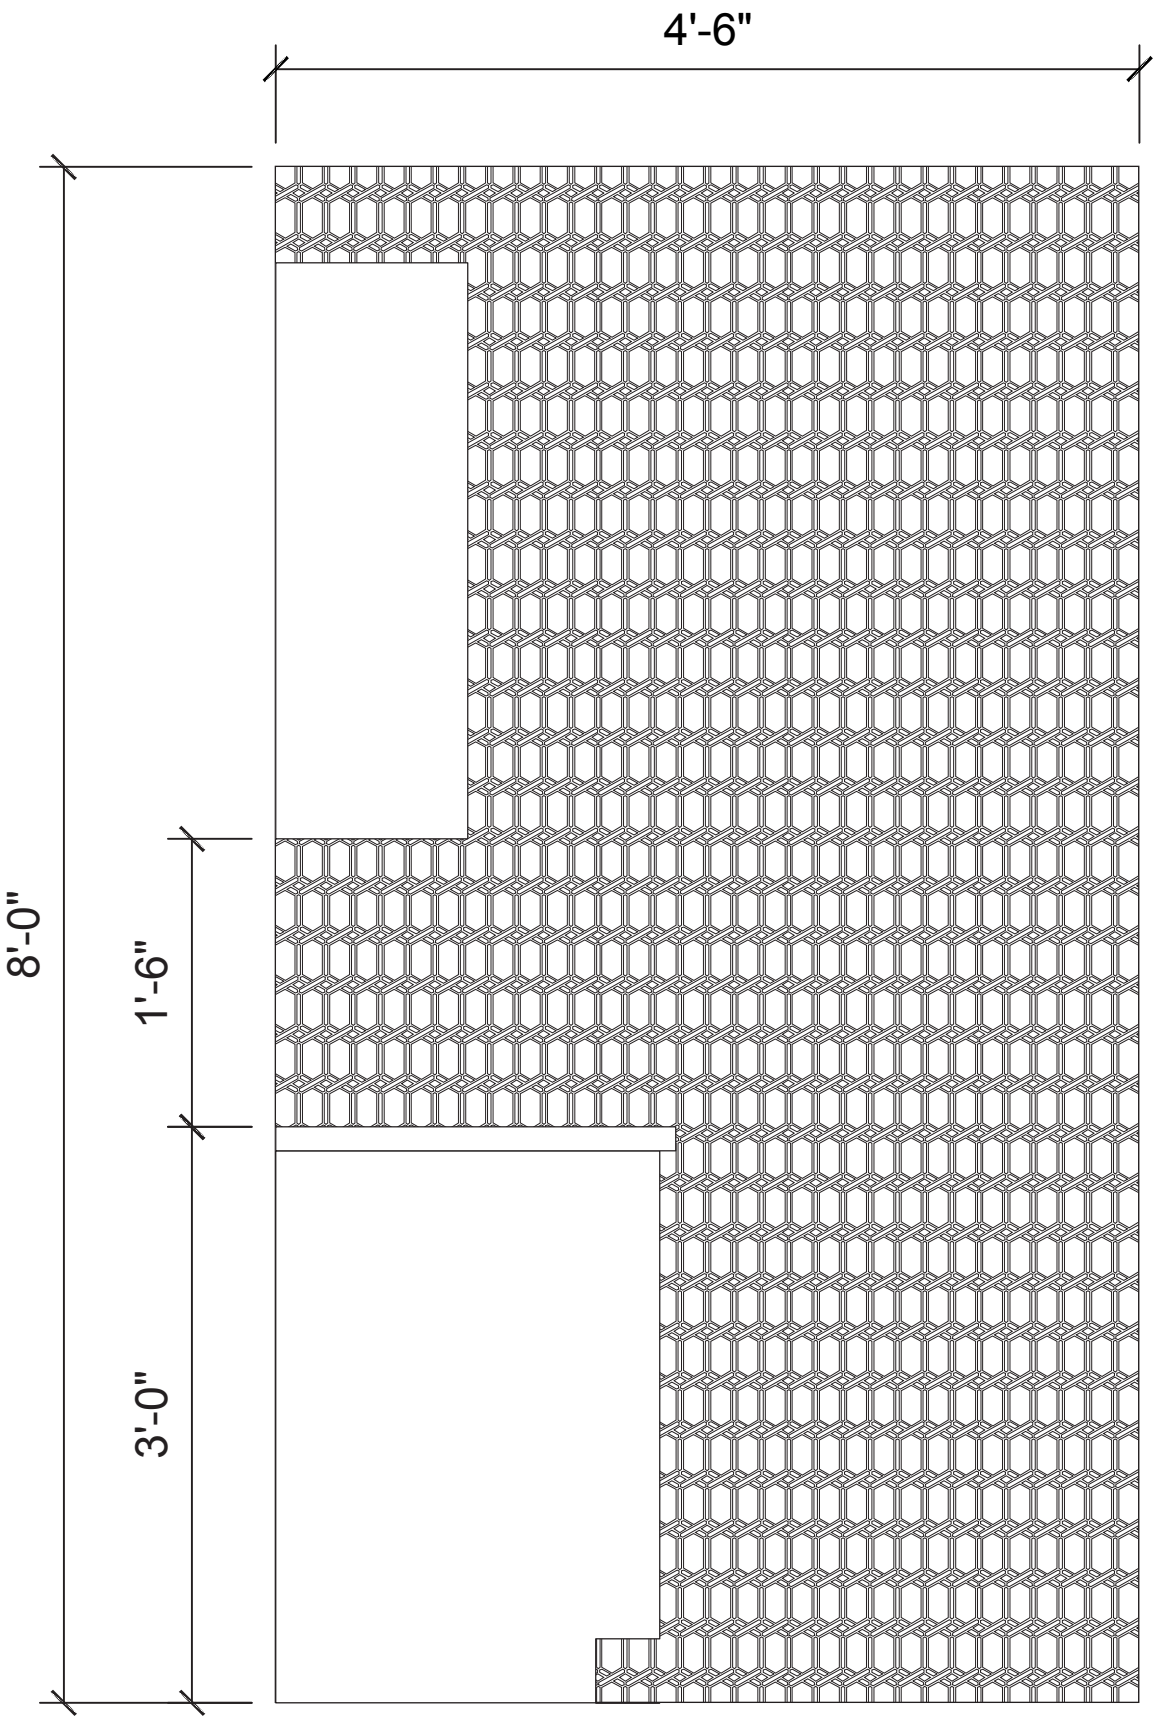


WALKER® ZANGER

Pietra Gris - Normandy Mosaic

Revised: May 2022

WALKER ZANGER®

PIETRA GRIS
Capri Mosaic

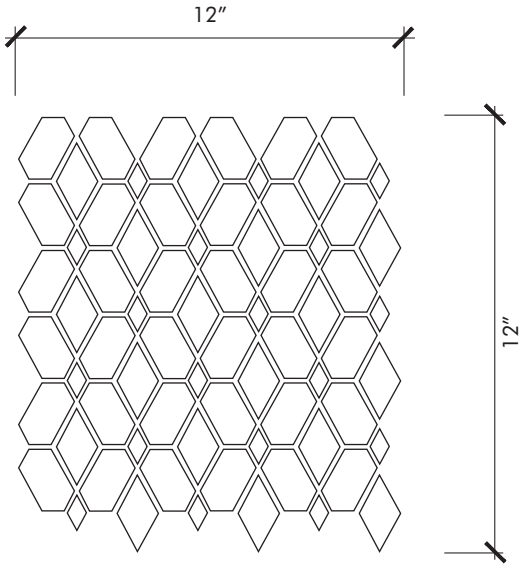

Material	Stone
Finish	Natural
Thickness	3/8″
Cut and Fill Size	11 1/2″ x 12 2/5″
Square Feet/Piece	0.9960
Mounting	Mesh

Available Colors
Light Grey

Usage

	Commercial Interior & Exterior Wall & Floor
	Residential Interior & Exterior Wall & Floor
	Fireplace
	Shower Floor & Wall
	Steam Shower Floor & Wall

Notes:

- We recommend sealing all natural stone products with a penetrating sealer and sealing all porous non-polished stone (limestone, tumbled marble, etc.) prior to grouting. This prevents grout from staining or affecting the color of the stone. Stone is a natural product, and care should be taken to protect it from harsh abrasive cleaners and abrasive cleaning tools.
- White thin-set or mortar is required: light limestones, tumbled stones, "antiqued stones", and light colored marbles.
- Likely identified with dry seams, pits, fossils and glass veins that are often filled at the factory. The fill may perhaps leak through the voids. In this case, refilling these voids may be a necessary maintenance procedure.

Material Data


	Color Variation
	Frost Resistant

Sealing

	Sealing is required

Cleaning and Maintenance

	Damp cloth and a gentle non-acidic soap

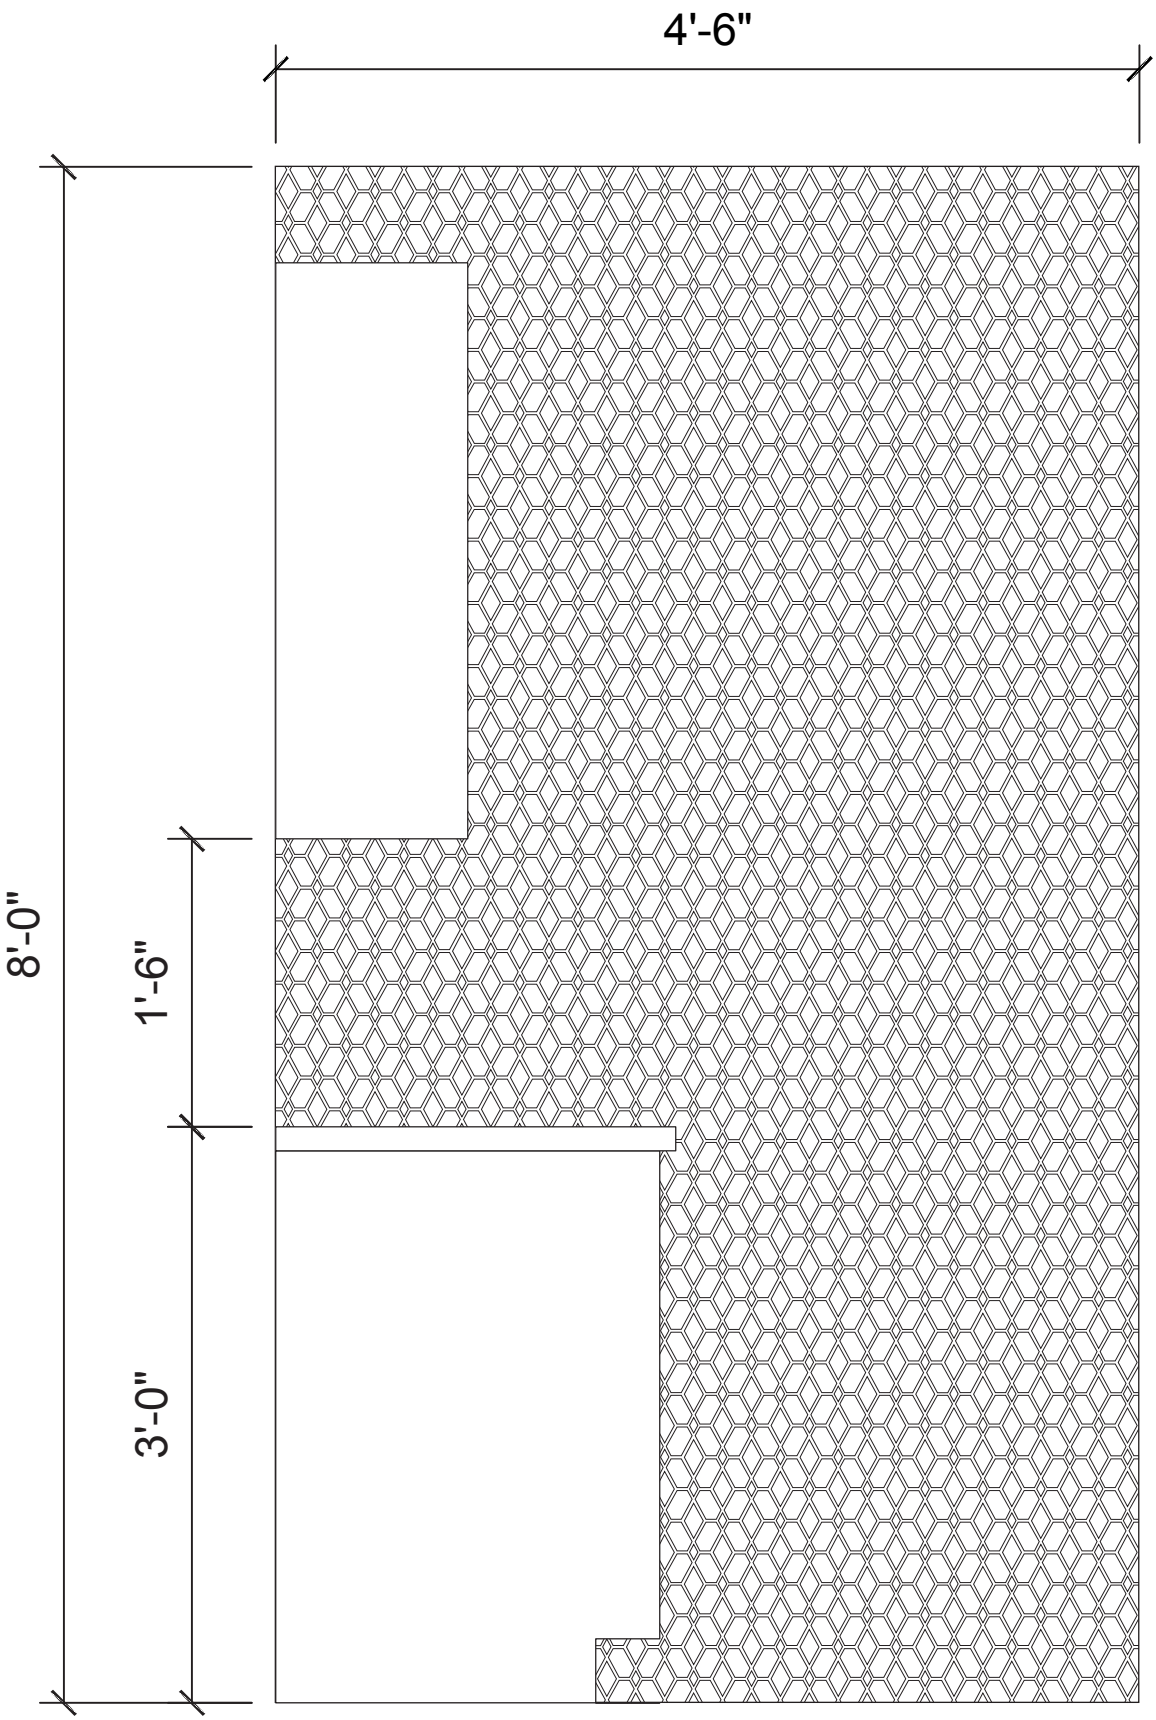


WALKER® ZANGER

Pietra Gris - Capri Mosaic

Revised: May 2022

WALKER ZANGER®

PIETRA GRIS
Colosseum Hexagon

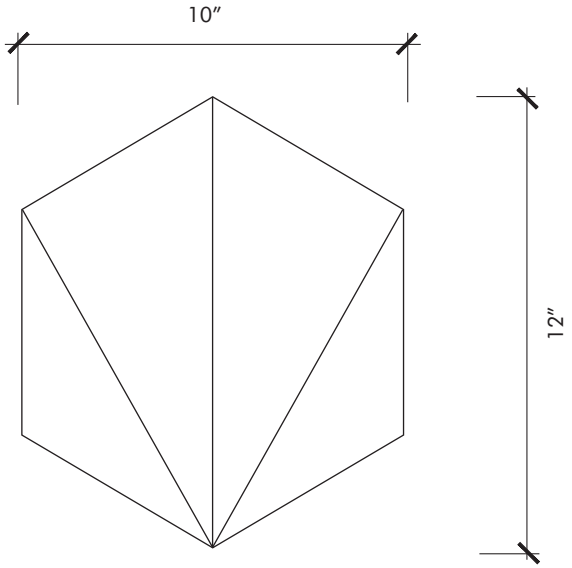

Material	Stone
Finish	Natural
Thickness	3/8″
Cut and Fill Size	10 1/5″ x 11 4/5″
Square Feet/Piece	0.8403
Mounting	Loose

Available Colors
Light Grey

Usage

	Commercial Interior & Exterior Wall & Floor
	Residential Interior & Exterior Wall & Floor
	Fireplace
	Shower Floor & Wall
	Steam Shower Floor & Wall

Notes:

- We recommend sealing all natural stone products with a penetrating sealer and sealing all porous non-polished stone (limestone, tumbled marble, etc.) prior to grouting. This prevents grout from staining or affecting the color of the stone. Stone is a natural product, and care should be taken to protect it from harsh abrasive cleaners and abrasive cleaning tools.
- White thin-set or mortar is required: light limestones, tumbled stones, "antiqued stones", and light colored marbles.
- Likely identified with dry seams, pits, fossils and glass veins that are often filled at the factory. The fill may perhaps leak through the voids. In this case, refilling these voids may be a necessary maintenance procedure.

Material Data


MEDIUM	Color Variation
	Frost Resistant

Sealing

	Sealing is required

Cleaning and Maintenance

	Damp cloth and a gentle non-acidic soap

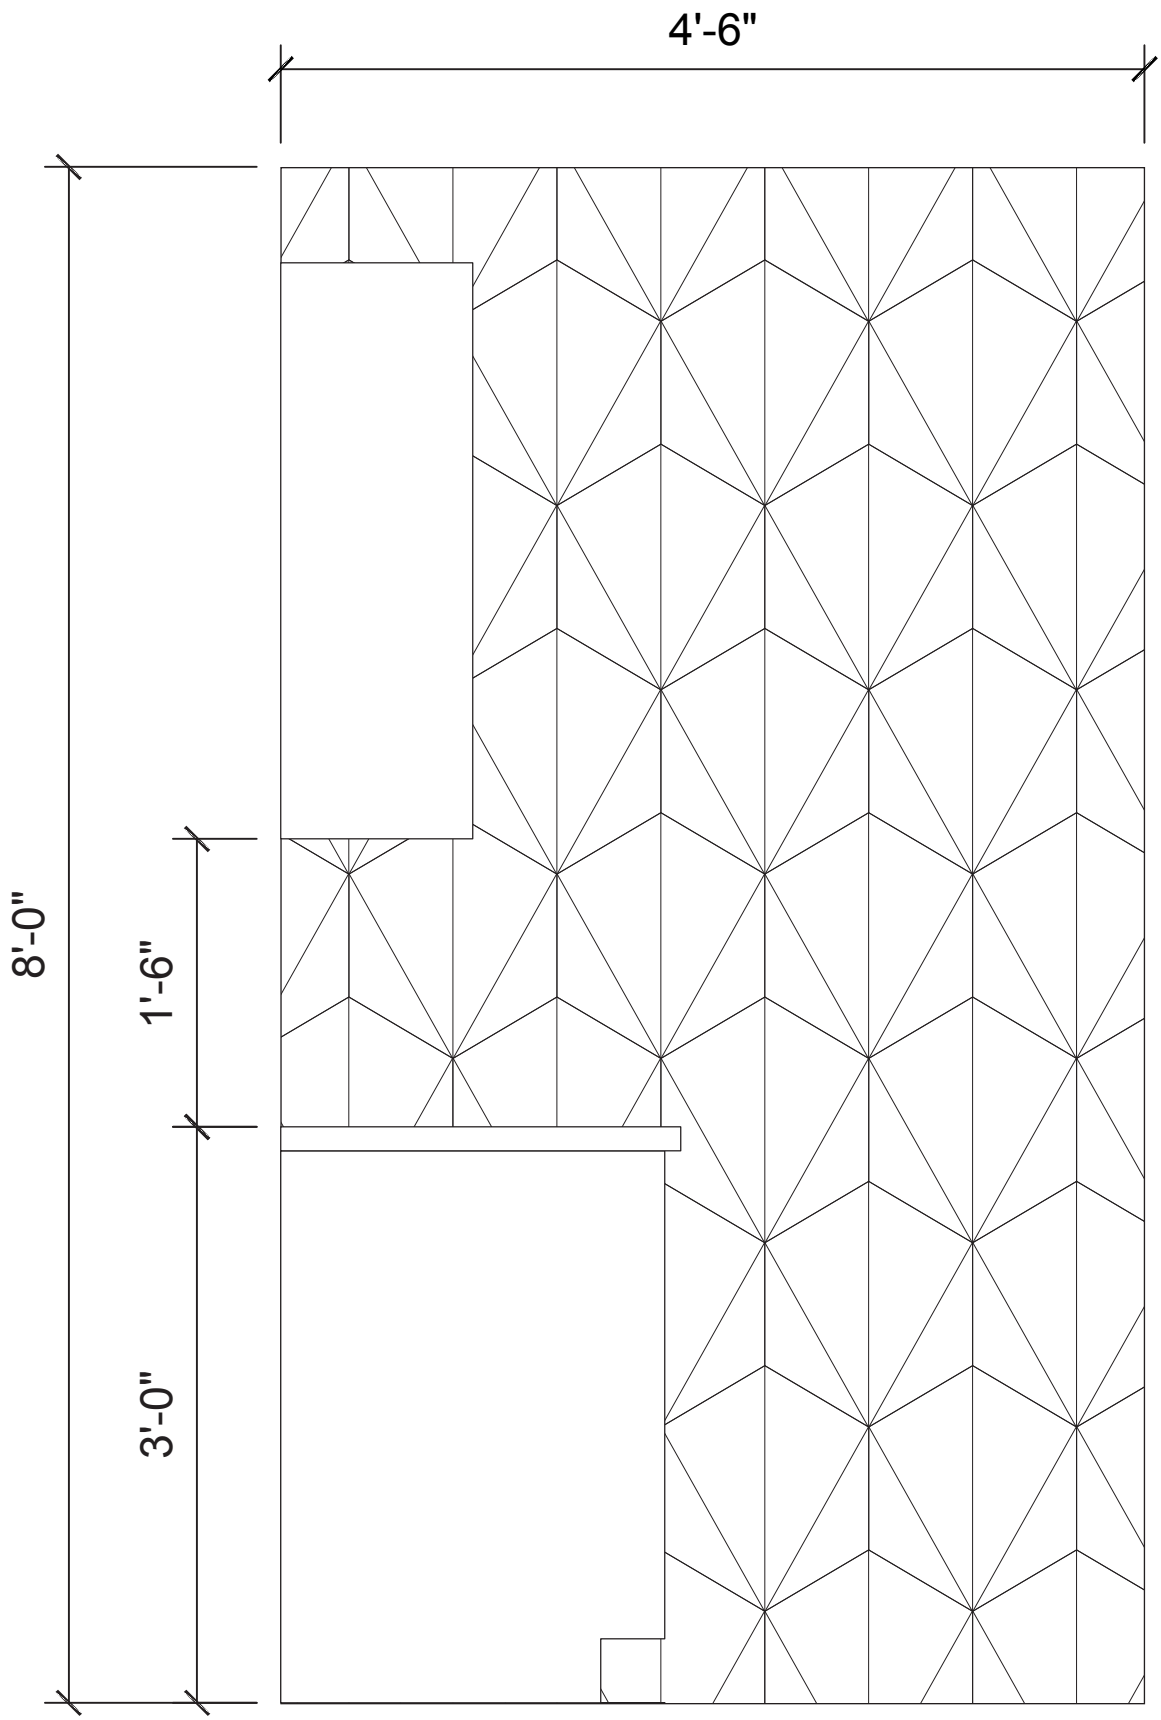

WALKER ZANGER®

Pietra Gris - Colosseum Hexagon

Revised: May 2022