



ABBEY ROAD

The fascinating range of natural stone is celebrated with our Abbey Road mosaic. Elongated rectangles are precisely placed to create linear columns which can be installed horizontally or vertically. Ideal for use on walls and floors and stocked in a variety of our most popular marbles, limestones, and onyx.



PICTURED: ABBEY ROAD WHITE SAND

ABBEEY ROAD

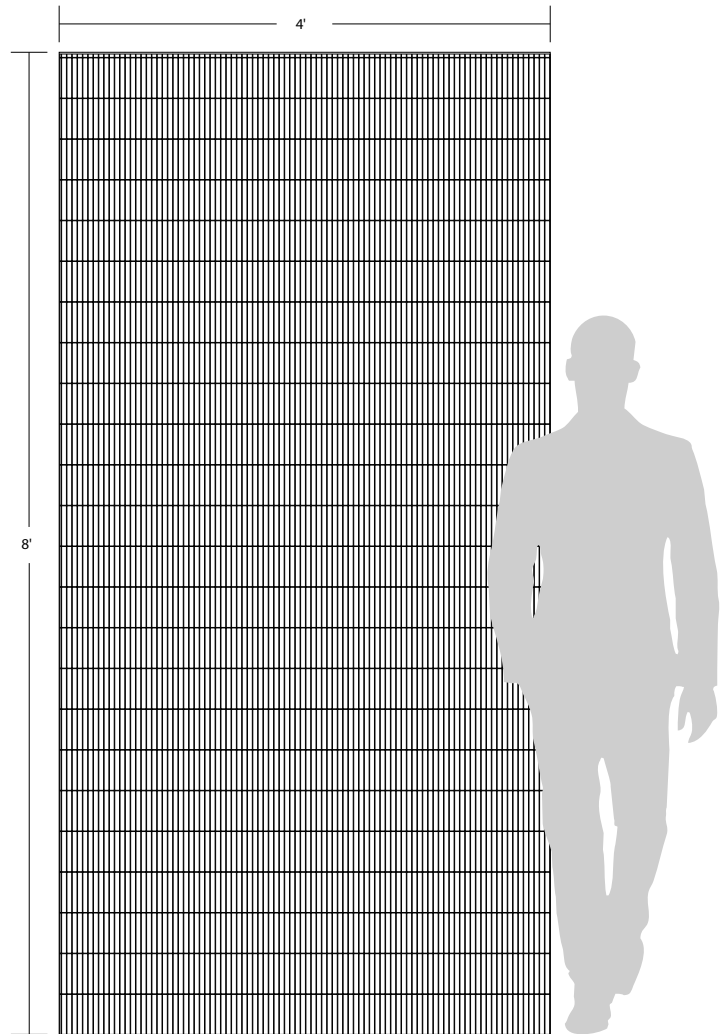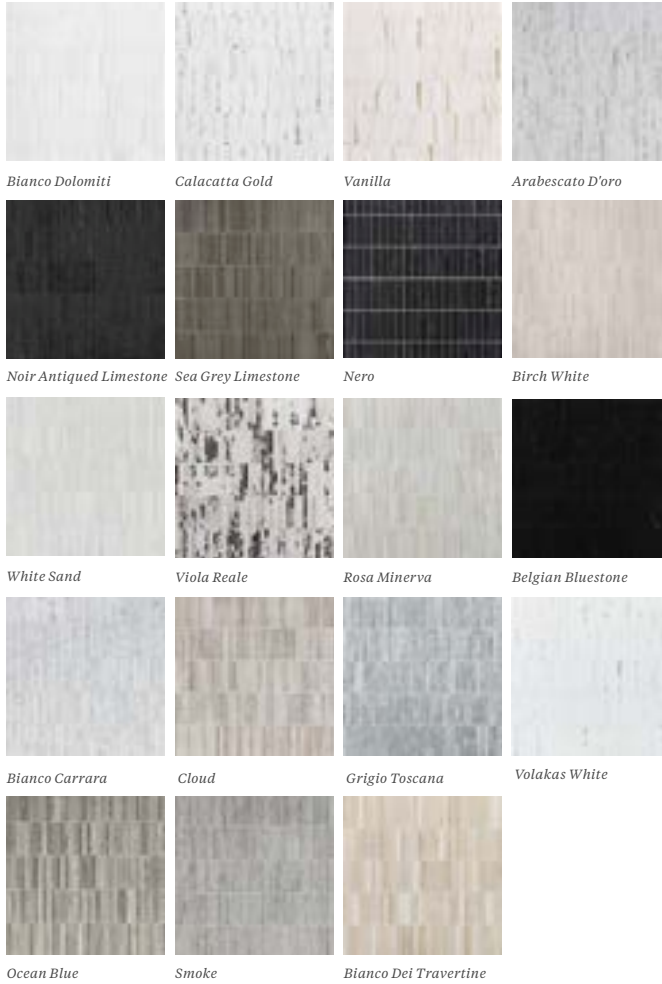

APPLICATIONS									VARIATION		TAILORED TO CUSTOMIZATION	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND			CARPET CUTTING	FIELD
Commercial Light/Medium ¹	All	Yes, including steam ²	Yes, including steam ³	No	Yes, non-freeze thaw ⁴	No	Yes	Yes			FINISH	MOSAIC
											SADDLE	VANITY TOP
											WATERJET	

INSTALLATION/MAINTENANCE									
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT
Ardex X77 Microtec White ⁵	Ardex FG-C Microtec Unsanded ⁶	As Established On Sheets	Ardex 8 + 9	Ardex SX	AquaMix Sealers Choice Gold	AquaMix Concentrated Cleaner	TCNA Handbook	No	Recommended

NOTES	
¹ Vanilla Onyx - Residential Light Sea Grey Antiqued & Birch White - Residential Heavy ² Vanilla Onyx - Conventional Only ³ Vanilla Onyx - Conventional Only, Grigio Toscana and Smoke - No ⁴ Vanilla Onyx, Rosa Minerva, Grigio Toscana, Ocean Blue, Volakas White - No ⁵ Alternate mortar - Ardex X4 White or Ardex 100% Solids Epoxy Adhesive White ⁶ Alternate grout: Ardex DG 1 One-Component Grout or Mapei Keracolor Unsanded ⁷ Abbey Road Arabescato D'oro is 1.06 sf/unit and 5.30 sf/box. It will not modulate with other Abbey Road options.	Tech Notes: Product MUST be installed in accordance with current TCNA Handbook Stone Methods. Individual sheets of this mosaic are not square. Sheets are irregular and combine into a seamless interlocking pattern. Plan your layout accordingly. Dry laying of this product prior to installation is required. Massage joints when blending individual sheets. White mortar is recommended for natural stone. The installation of intricate mosaic patterns may require the use of a mosaic nipper to hand cut pieces along the edge to fit or conduct adjustments throughout the installation. For straight cuts on a tile wet saw clear plastic face tape can be applied to keep the mosaic pieces aligned while cutting. Seal and utilize a grout release prior to grouting.

STONE MOSAIC
12 7/16" x 11 7/8" x 3/8" (1.03 sf/unit)
Interlocking Sheet ⁷
Honed/Antiqued Finish

SETTING NATURAL STONE MOSAICS ON A SHOWER FLOOR WITH ARDEX 100% SOLIDS EPOXY ADHESIVE WHITE

ARDEX 100% Solids Epoxy Adhesive White is suitable for each of the following installation methods shown in the Shower Receptors section in the most current edition of TCNA Handbook for Ceramic, Glass, and Stone Tile Installation.

B414-24 Stone, B441-24 Stone, B415-24 Stone, B420-24 Stone,
B426-24 Stone, B431-24 Stone, B421-24 Stone, B422-24 Stone.

IMPORTANT NEXT STEPS:	IMPORTANT WATER CLEANUP STEPS
• Pour Part A (Resin) into Part B (Hardener) bucket and hand mix to achieve color blend. • Mix using a power mixer (approx. 650 RPM) for approx. 2 minutes. • Pour the entire mixture out of the bucket onto the floor or onto a scrape piece of tile. It is very important to get the entire mixture out of the bucket immediately. • Spread a thin layer of epoxy mortar with a flat trowel over a predetermined area of the shower floor. • Using a square notch trowel or a V-notch trowel, spread the epoxy mortar over the same predetermined shower floor area. • Next flatten out all trowel ridges with flat side of trowel striving to achieve 100% coverage over the predetermined shower floor area. • Place the interlocking mosaic sheets into mortar bed over the predetermined shower floor area for 100% coverage. • Tap down and level the mosaic sheets with a grout float over the predetermined area. • Allow mortar to set, harden, and cure.	• Wipe up any epoxy residue with sponges and clean water. • Note: No soap and no chemicals are needed. Just clean water. • Rinse sponges and change the water often. • Finally wipe with cool, clean water & clean sponges. • Use clean microfiber cloths for final wipe down.

Artistic Tile recommends sealing all natural stones before grouting.

ADENA *by* LORI WEITZNER

Adena reimagines Lori Weitzner's luxurious Adelaide embroidery pattern in micro-mosaic stone. Tiny tumbled pieces of stone are set into an ombre pattern inside of intricately scalloped marble frames. The result is a beautifully arched, textured, & timeless arabesque in three tranquil colorways: Blue, crafted from Bardiglio Nuvolato, Azul Cielo, and White Sand; Cream, with White Sand, Pink, and Thassos marbles; and Grey, combining Smoke limestone, Botticino, and White Sand.



ADENA




Blue



Cream



Grey

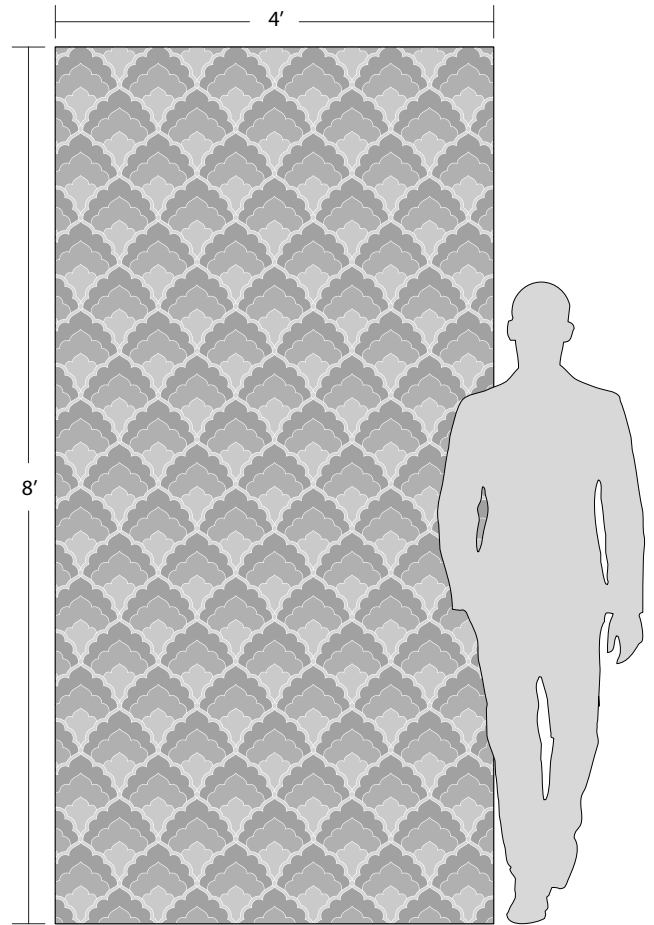

APPLICATIONS									VARIATION	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1 V2 V3 V4	
Commercial Light/Medium	All	Yes, including steam ³	Yes, including steam, linear drain ³	No	Yes, non-freeze thaw	No	Yes	Yes		


INSTALLATION/MAINTENANCE										MOSAIC	
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT		
Ardex X4 White Tile & Stone Mortar ¹	Ardex FG-C Microtec Unsanded ²	As established on sheets ¹	Ardex 8 + 9	Ardex SX	AquaMix Sealer's Choice Gold	AquaMix Concentrated Cleaner	TCNA Handbook	No	Sample Dry Layout		

NOTES											
¹ Alternate mortar - Mapei Ultraflex 2 White or Mapei Kerabond White w/Keralastic Additive ² Alternate grout - Mapei Ultracolor Plus FA or Mapei Keracolor Unsanded ³ Showers: Product MUST be installed in accordance with current TCNA Handbook Stone Methods *Tech Note: Individual sheets of this mosaic are not square. Sheets are irregular and combine into a seamless interlocking pattern. Plan your layout accordingly. White mortar is recommended for natural stone. Product MUST be installed in accordance with current TCNA Handbook Stone Methods.											

4 1/4" x 9 3/4" x 3/8" Stone Mosaic											

BASKETWEAVE

The classic Basketweave pattern has had a secure place in the home since the Victorian Era, gracing spaces with geometric symmetry and a traditional look. Our clean interpretation in polished Italian marble, is available with black squares of Nero Marquina or blue squares of Bardiglio stone.

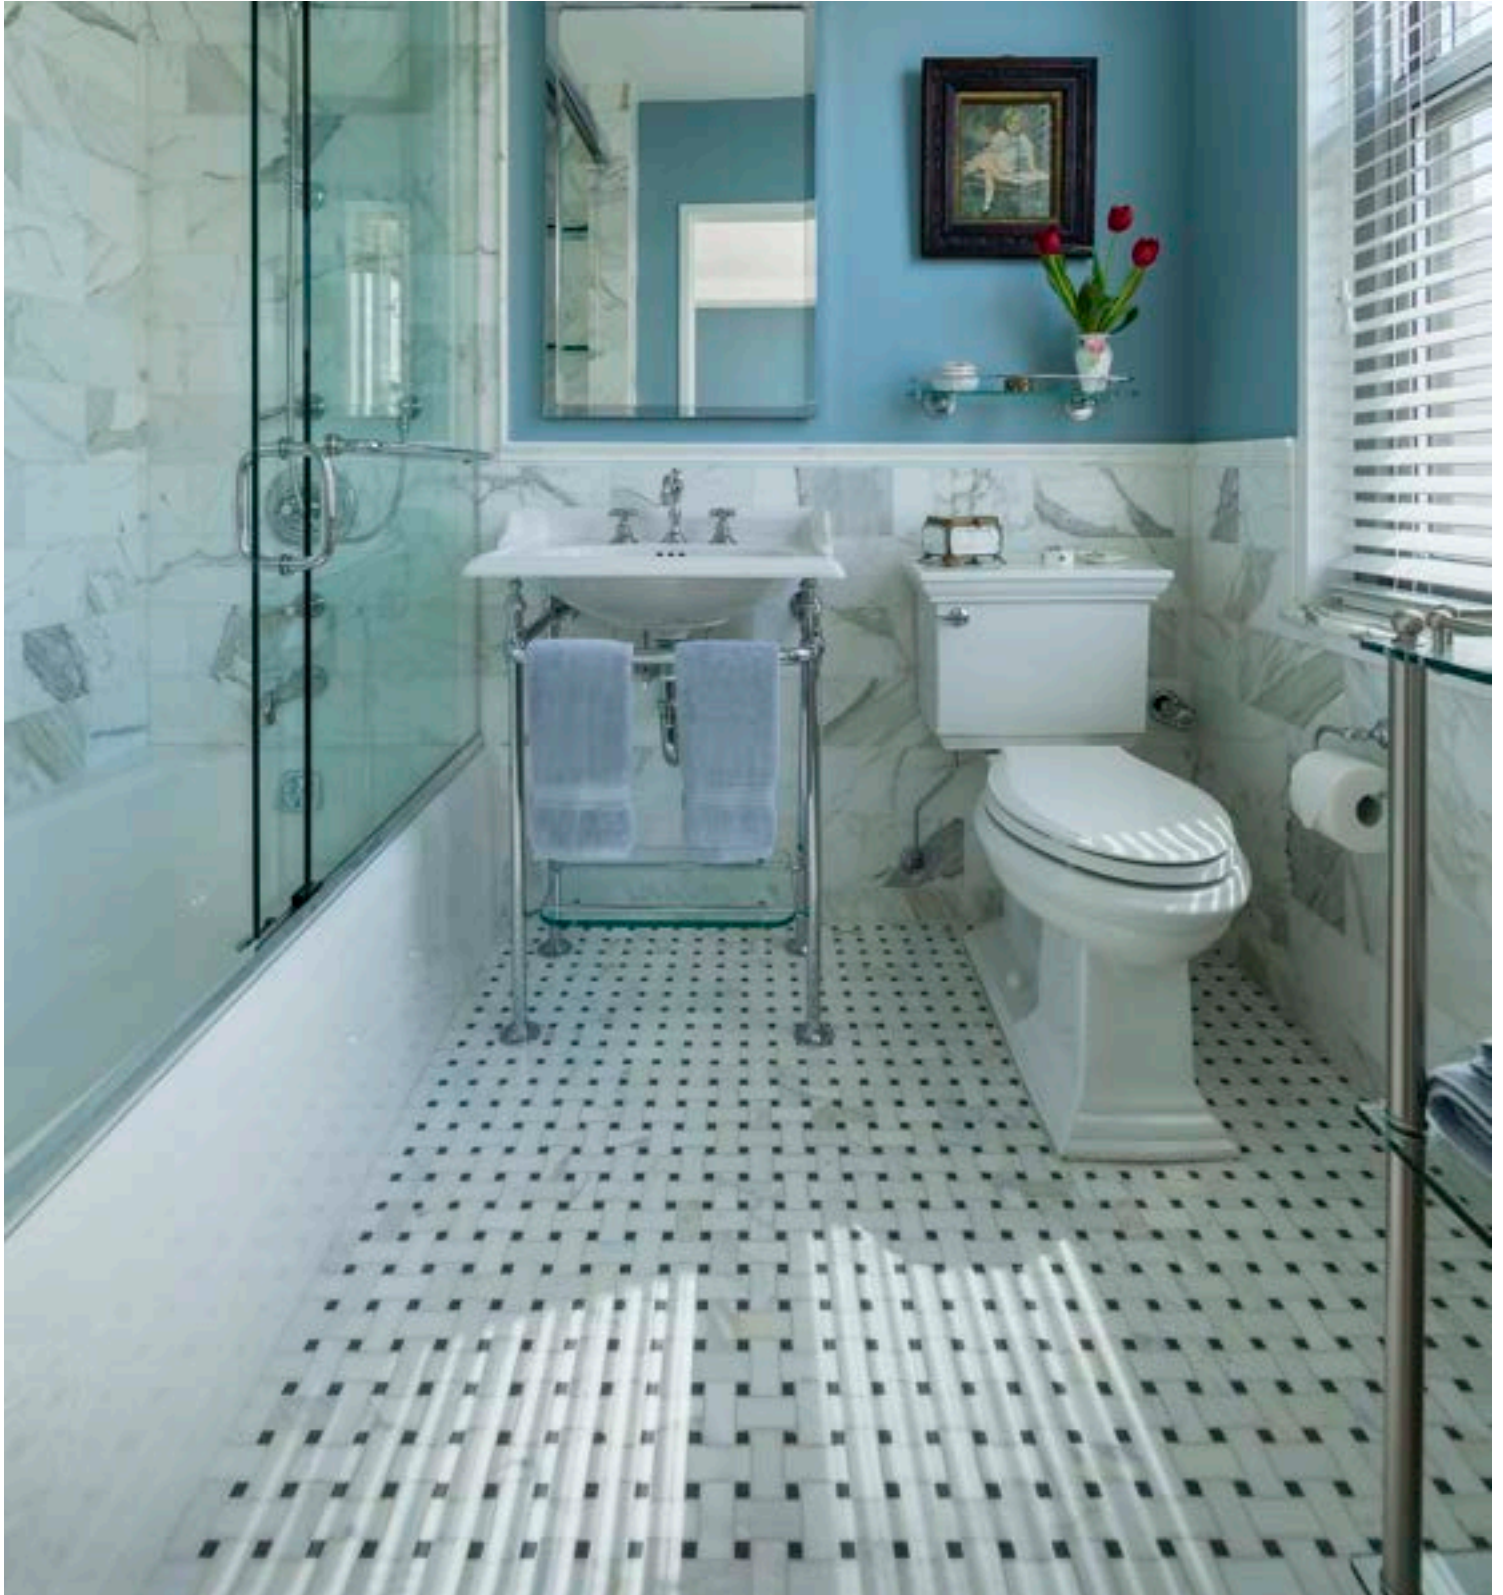

BASKETWEAVE

MEBWBCBR




*Bianco Carrara polished
Bardiglio polished dots*

STHMPBWO



*Thassos polished
Blank dots*




*Bianco Carrara polished
Nero Marquina polished dots*

MEBWBCNE



*Smoke mixed finish
Grey Foussana hone dots*

CUTMBWSMGF

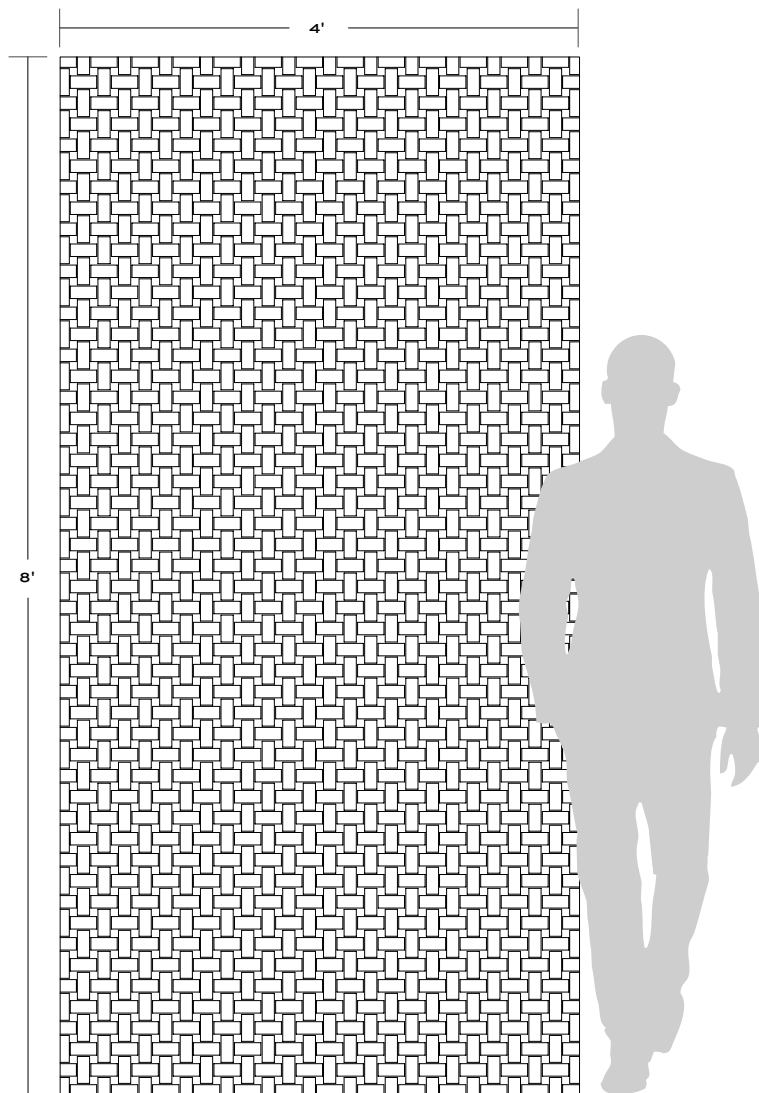

APPLICATIONS							
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP
Medium Traffic Commercial	All	Yes, including steam	Yes	No	No	No	Yes

VARIATION			
V1	V2	V3	V4

INSTALLATION/MAINTENANCE									
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT
Ardex X4 White ¹	Ardex FG-C Microtec Unsanded ²	As established on sheets	Mapei Mapelastic AquaDefense	Mapei Keracaulk Sanded	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook	Maintain sheet orientation	Recommended

NOTES									
¹ Alternate Mortar - Mapei Ultraflex 2 White ² Alternate Grout - Mapei Ultracolor Plus or Mapei Flexcolor CQ									

MOSAIC
12" x 12" x 3/8" (1.00 sf/unit) interlocking sheets Edge of sheet does not create straight edges out of the box.


BROKEN JOINT 1 CM

Broken Joint mosaics convey an old-world elegance as few other materials do. Their subtle asymmetry and intentional offsets evoke the floors of ancient structures, where skilled artisans would hand place each mosaic piece. Our Mini Broken Joint mosaics retain this hand-worked aesthetic in an even more refined, miniature form. Stocked in a variety of our most popular marbles and onyx.



SHOW: BROKEN JOINT 1CM NORWEGIAN ROSE
WITH NORWEGIAN ROSE SLAB

BROKEN JOINT 1 CM



Calacatta Gold



Bianco Dolomiti



Norwegian Rose



Statuary



Calacatta Bluette



Nero



Lilac



Vanilla Onyx



Ming Classico



Belgian Bluestone



Cloud Limestone



White Sand



Rosa Perlino



Thassos



Rosa Portogallo




Volakas White

SIZE COMPARISON



1 cm

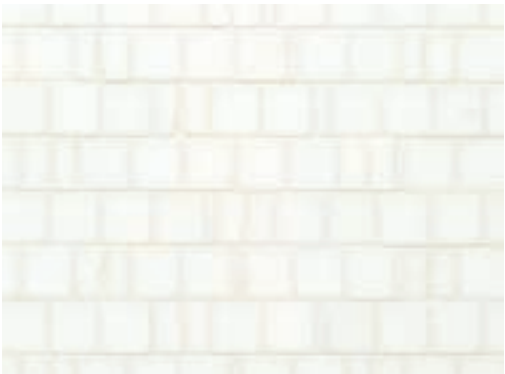


3 cm

APPLICATIONS

INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND
Commercial Light / Medium ¹	All	All ²	Yes ³	No	Yes, non-freeze thaw ⁴	No	Yes ⁵	Yes


VARIATION ⁶



INSTALLATION/MAINTENANCE

SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT
Ardex X77 White Microtec Fiber Reinforced Mortar ⁷	Ardex FG-C Microtec Unsanded ⁸	As established on sheets	Ardex 8+9	Ardex SX	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook	Maintain sheet orientation	Required

AVAILABLE SIZES



12" x 12" x 3/8"
(1.00 sf/unit)
interlocking sheets

Sold in a 3 piece set

NOTES

¹ Vanilla Onyx - Light Traffic Residential
² Vanilla Onyx, Cloud, Cloud Limestone, Rosa Perlino - Conventional Only | Calacatta Gold, Statuary, Belgian Bluestone, Ming Classico, Rosa Portogallo, Thassos, Volakas White, White Sand - Yes, including steam
³ Calacatta Bluette, Cloud, Cloud Limestone - No | Belgian Bluestone, Ming Classico, Rosa Portogallo, Thassos, Volakas White, White Sand - Yes, including steam | Rosa Perlino - Conventional only
⁴ Vanilla Onyx, Ming Classico, Rosa Perlino, Rosa Portogallo, Volakas White - No
⁵ Vanilla Onyx & Statuary - No
⁶ White Sand - V4
⁷ Calacatta Bluette, Rosa Perlino, Rosa Portogallo & Cloud Limestone Mortar - Ardex N23 Microtec Rapid Set, Mapei Granirapid 2-Part System
⁸ Alternate Setting Material: Ardex X4 White Tile & Stone Mortar

⁹ Alternate Grout: Mapei Keracolor Unsanded
Tech Notes: Product MUST be installed in accordance with current TCNA Handbook Stone Methods. Ardex 100% Solids Epoxy Adhesive White is recommended for installing this product in shower floor applications. See complete install instructions for further details. Individual sheets of this mosaic are not square. Sheets are irregular and combine into a seamless interlocking pattern. Plan your layout accordingly. Dry laying of this product prior to installation is required. Massage joints when blending individual sheets. White mortar is recommended for natural stone. The installation of intricate mosaic patterns may require the use of a mosaic nipper to hand cut pieces along the edge to fit or conduct adjustments throughout the installation. For straight cuts on a tile wet saw clear plastic face tape can be applied to keep the mosaic pieces aligned while cutting. Seal and utilize a grout release prior to grouting. White Sand may exhibit random spotting of mineral deposits.

SETTING NATURAL STONE MOSAICS ON A SHOWER FLOOR WITH ARDEX 100% SOLIDS EPOXY ADHESIVE WHITE

ARDEX 100% Solids Epoxy Adhesive White is suitable for each of the following installation methods shown in the Shower Receptors section in the most current edition of TCNA Handbook for Ceramic, Glass, and Stone Tile Installation.

B414-24 Stone, B441-24 Stone, B415-24 Stone, B420-24 Stone,
B426-24 Stone, B431-24 Stone, B421-24 Stone, B422-24 Stone.

IMPORTANT NEXT STEPS:	IMPORTANT WATER CLEANUP STEPS
• Pour Part A (Resin) into Part B (Hardener) bucket and hand mix to achieve color blend. • Mix using a power mixer (approx. 650 RPM) for approx. 2 minutes. • Pour the entire mixture out of the bucket onto the floor or onto a scrape piece of tile. It is very important to get the entire mixture out of the bucket immediately. • Spread a thin layer of epoxy mortar with a flat trowel over a predetermined area of the shower floor. • Using a square notch trowel or a V-notch trowel, spread the epoxy mortar over the same predetermined shower floor area. • Next flatten out all trowel ridges with flat side of trowel striving to achieve 100% coverage over the predetermined shower floor area. • Place the interlocking mosaic sheets into mortar bed over the predetermined shower floor area for 100% coverage. • Tap down and level the mosaic sheets with a grout float over the predetermined area. • Allow mortar to set, harden, and cure.	• Wipe up any epoxy residue with sponges and clean water. • Note: No soap and no chemicals are needed. Just clean water. • Rinse sponges and change the water often. • Finally wipe with cool, clean water & clean sponges. • Use clean microfiber cloths for final wipe down.

Artistic Tile recommends sealing all natural stones before grouting.

BROKEN JOINT 3 CM

Broken Joint mosaics convey an old-world elegance as few other materials do. Their subtle asymmetry and intentional offsets evoke the floors of ancient structures, where skilled artisans would hand place each mosaic piece. Stocked in a variety of our most popular marbles and limestones.



BROKEN JOINT 3 CM



Bianco Dolomiti-*Polished*



Calacatta Gold-*Honed*



Thassos- *Polished*



Pacific White-*Polished*



Bianco Carrara- *Polished*



Statuary-*Honed*



Noir- *Antiqued*



Sea Grey- *Antiqued*

SIZE COMPARISON



1 cm



3 cm

APPLICATIONS								
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND
Commercial Light/Medium ¹	All	Yes, Including Steam ²	Yes, Including Steam ²	No	Yes, non-freeze thaw ³	No	Yes ⁴	Yes

VARIATION			
V1	V2	V3	V4

INSTALLATION/MAINTENANCE									
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT
Ardex X4 White Tile & Stone Mortar ⁶	Ardex FG-C Microtec Unsanded	As established on sheets	Ardex 8+9 ⁷	Ardex SX Silicone Sealant ⁸	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook	Maintain Sheet Orientation	Recommended

AVAILABLE SIZES
12" x 12" x 3/8" (1.05 SF) INTERLOCKING SHEET

NOTES
¹ For Noir Antiqued Limestone and Sea Grey Antiqued Limestone residential heavy for interior floors. ² Shower - Product MUST be installed in accordance with current TCNA Handbook Stone Methods. ³ Exterior Wall - Noir Antiqued Limestone no exterior wall. ⁴ Counter Top - For Statuary no counter top application. ⁵ Variation - Sea Grey Antiqued Limestone, Noir Antiqued Limestone, Thassos and Bianco Carrara V2. ⁶ Mortar - For Noir Antiqued Limestone, Sea Grey Antiqued Limestone, Thassos, and Pacific White use Ardex X77 White Microtec Fiber Reinforced Mortar. ⁷ Membrane - For Statuary and Calacatta Gold polished and honed use Mapel Mapelastic AquaDefense. ⁸ Caulk - For Statuary and Calacatta Gold polished and honed use Mapel Keracaulk Siliconized Acrylic. TECH SPEC.1 For Noir Antiqued Limestone and Sea Grey Antiqued Limestone seal and utilize a grout release prior to grouting. Individual sheets of this mosaic are not square. Sheets are irregular and combine into a seamless interlocking pattern. Plan your layout accordingly. White mortar is recommended for natural stone

SETTING NATURAL STONE MOSAICS ON A SHOWER FLOOR WITH ARDEX 100% SOLIDS EPOXY ADHESIVE WHITE

ARDEX 100% Solids Epoxy Adhesive White is suitable for each of the following installation methods shown in the Shower Receptors section in the most current edition of TCNA Handbook for Ceramic, Glass, and Stone Tile Installation.

B414-24 Stone, B441-24 Stone, B415-24 Stone, B420-24 Stone,
B426-24 Stone, B431-24 Stone, B421-24 Stone, B422-24 Stone.

IMPORTANT NEXT STEPS:	IMPORTANT WATER CLEANUP STEPS
• Pour Part A (Resin) into Part B (Hardener) bucket and hand mix to achieve color blend. • Mix using a power mixer (approx. 650 RPM) for approx. 2 minutes. • Pour the entire mixture out of the bucket onto the floor or onto a scrape piece of tile. It is very important to get the entire mixture out of the bucket immediately. • Spread a thin layer of epoxy mortar with a flat trowel over a predetermined area of the shower floor. • Using a square notch trowel or a V-notch trowel, spread the epoxy mortar over the same predetermined shower floor area. • Next flatten out all trowel ridges with flat side of trowel striving to achieve 100% coverage over the predetermined shower floor area. • Place the interlocking mosaic sheets into mortar bed over the predetermined shower floor area for 100% coverage. • Tap down and level the mosaic sheets with a grout float over the predetermined area. • Allow mortar to set, harden, and cure.	• Wipe up any epoxy residue with sponges and clean water. • Note: No soap and no chemicals are needed. Just clean water. • Rinse sponges and change the water often. • Finally wipe with cool, clean water & clean sponges. • Use clean microfiber cloths for final wipe down.

Artistic Tile recommends sealing all natural stones before grouting.


CALYPSO

Calypso blends stone dots in multiple sizes along elongated, ogee waves in a pattern that evokes effervescent bubbles ascending in a glass. Stocked in warm cream and cool blue colorways, both of which ombre from dark to light.

Designed by Artistic Tile's Jason Berube.




CALYPSO

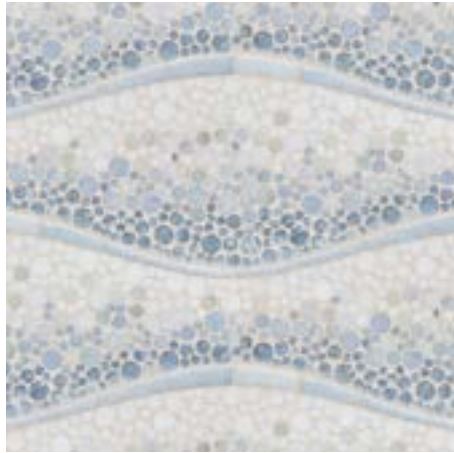

Blue Ombré- Polished




Cream Ombré- Polished

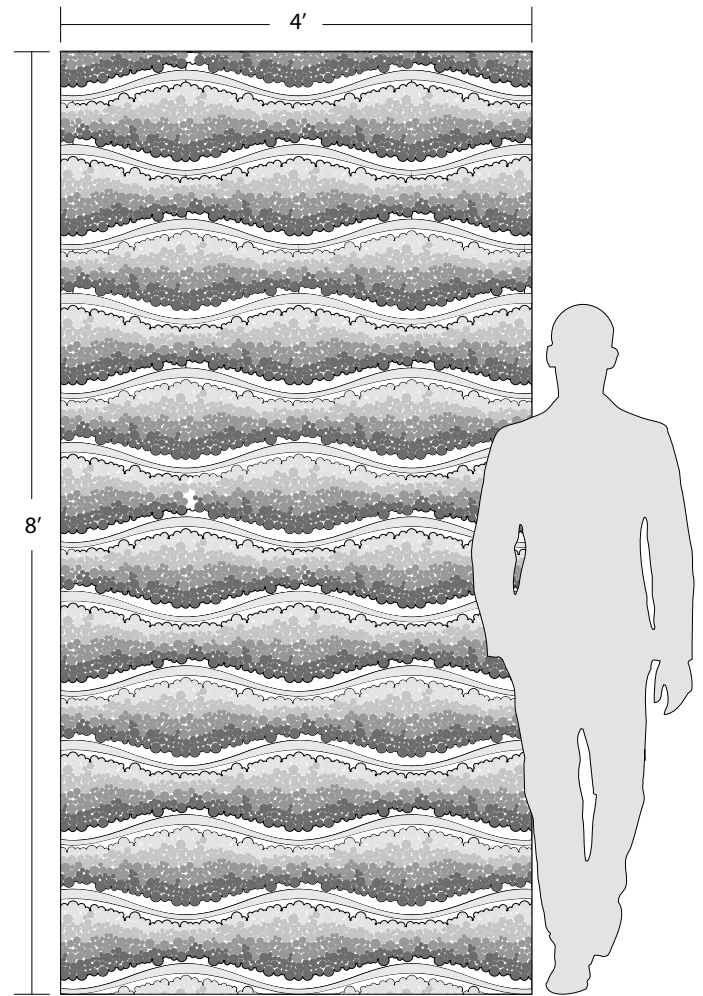

APPLICATIONS									VARIATION				TAILORED TO CUSTOMIZATION	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND						
Commercial Light/Medium	All	All	Yes	No	Yes, non-freeze thaw	No	Yes	Yes						
INSTALLATION/MAINTENANCE									MOSAIC					
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT					
Ardex X4 White Tile & Stone Mortar ¹	Ardex FG-C Microtec Unsanded ²	As established on sheets	Ardex B + 9	Ardex SX	AquaMix Sealer's Choice Gold	AquaMix Concentrated Cleaner	TCNA Handbook	Maintain sheet orientation	Required					
NOTES										6 7/8" X 23" X 3/8" (1.09 sf/unit) Mesh mounted interlocking sheet				
¹ Alternate Mortar - Mapei Ultraflex 2 White or Mapei Kerabond White w/Keralastic Additive														
² Alternate Grout - Mapei Ultracolor Plus FA or Mapei Keracolor Unsanded														
Showers: Product MUST be installed in accordance with current TCNA Handbook Stone Methods.														
Tech Notes: White mortar is recommended for natural stone. Individual sheets of this mosaic are not square. Sheets are irregular and combine into a seamless interlocking pattern.														
Plan your layout accordingly.														
The installation of intricate mosaic patterns may require the use of a mosaic nipper to hand cut pieces along the edge to fit, or conduct repairs throughout the installation.														

1" x 3" CHEVRON MOSAIC

A distinct pattern from antiquity, timeless Chevron has become a permanent part of our growing collection of must-have mosaics. Available in gorgeous Calacatta Gold, Bianco Carrara, Bianco Dolomiti and Thassos marbles, Chevron is the pattern that takes you in multiple directions while always pointing straight to classic.

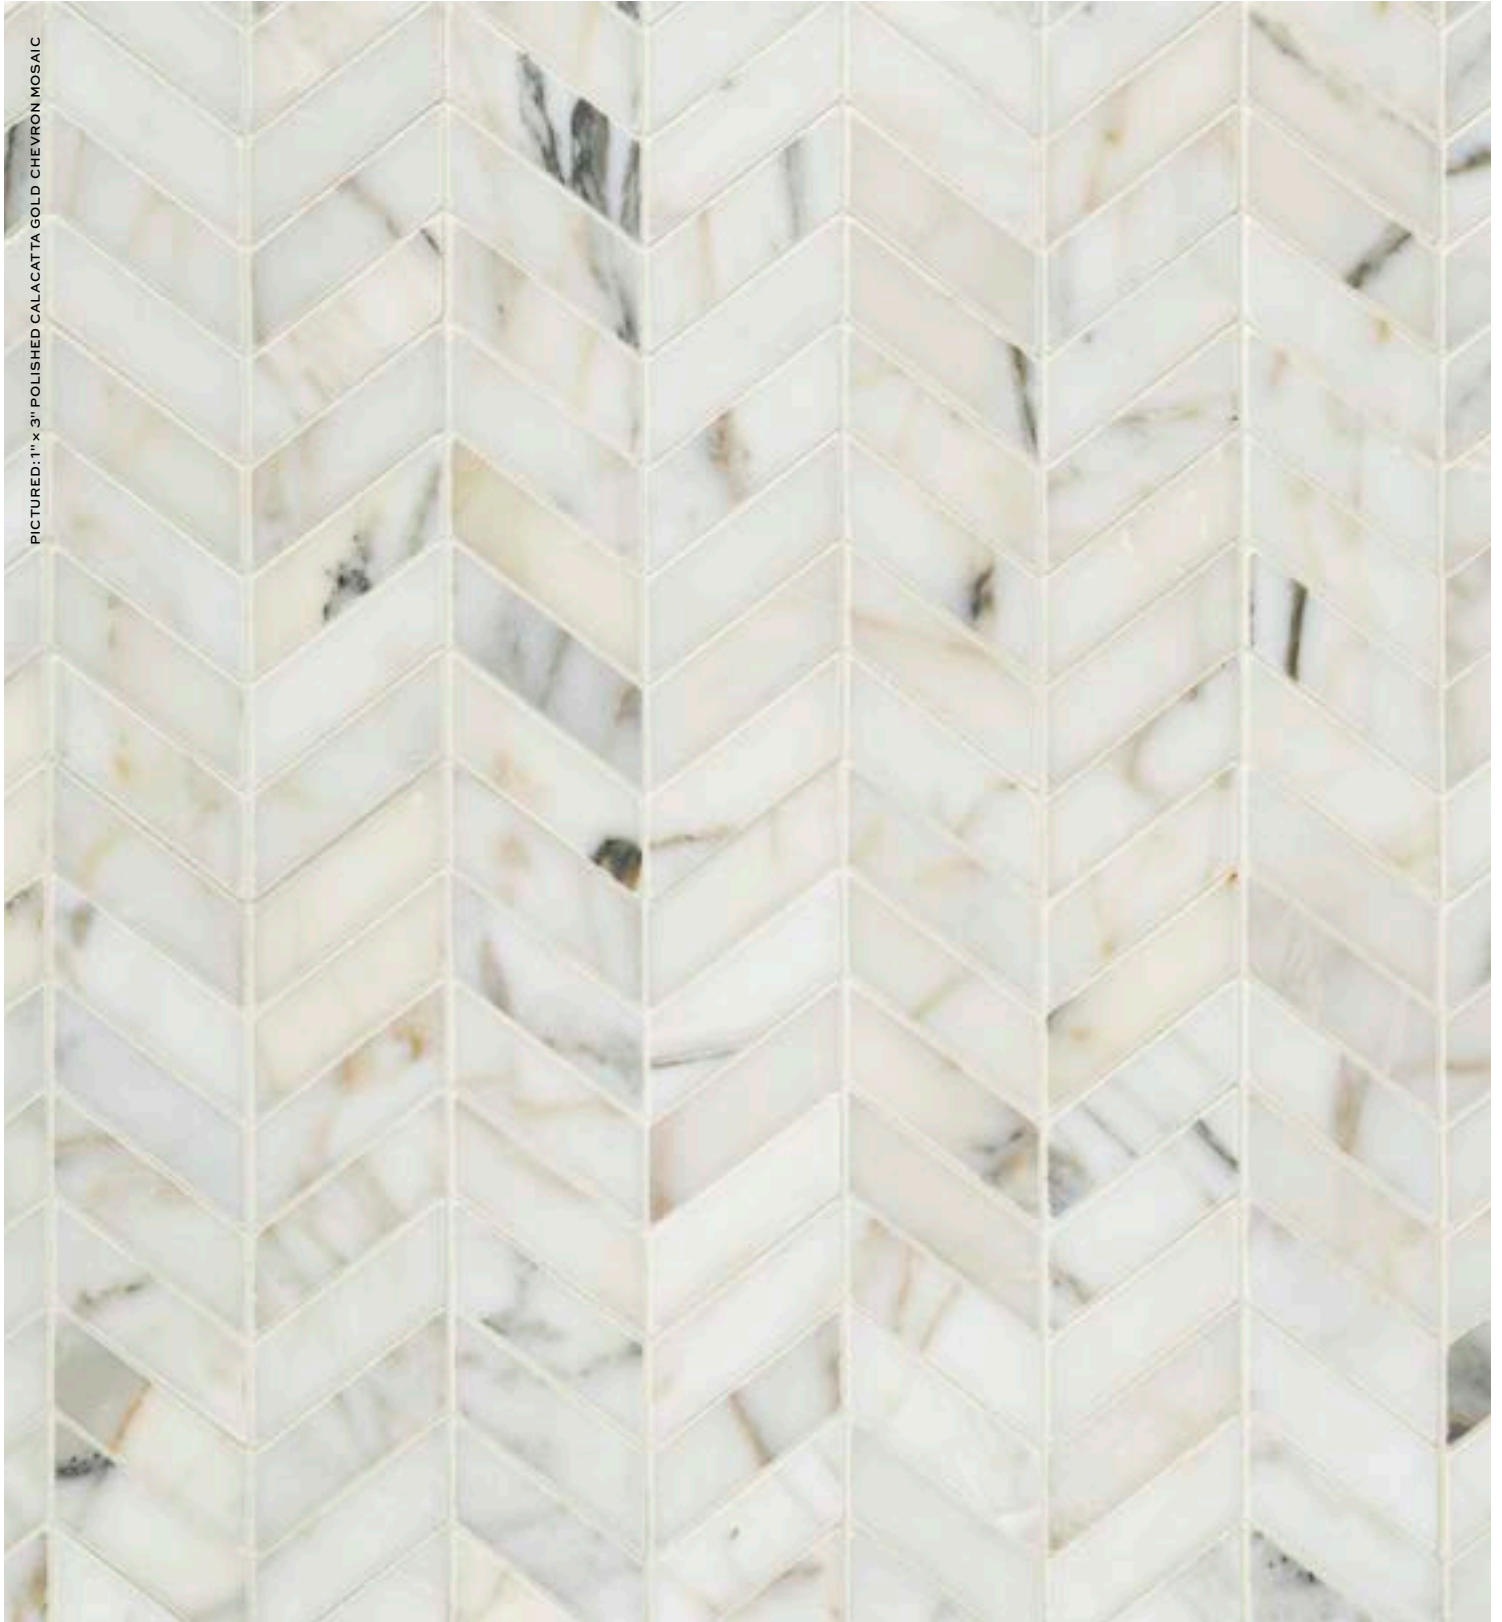

PICTURED: 1" x 3" POLISHED CALACATTA GOLD CHEVRON MOSAIC

1" x 3" CHEVRON MOSAIC



Polished Thassos



Polished Bianco Dolomiti



Polished Calacatta Gold



Polished Bianco Carrara

APPLICATIONS								VARIATION*				TAILORED TO CUSTOMIZATION			
Interior Floor Medium Traffic Commercial Interior Wall All Shower Wall Yes, including steam Shower Floor Yes Exterior Floor No Exterior Wall Yes, non-freeze thaw Pool / Fountain No Counter Top Yes								V1 V2 V3 V4				Carpet Cutting Field Finish Mosaic Saddle Vanity Top Waterjet			
INSTALLATION/MAINTENANCE								CHEVRON MOSAIC							
Setting Material See Notes Below Grout Mapei Ultracolor Plus Sanded Grout Joint As established on sheets Membrane Mapei Mapelastic AquaDefense Caulk Mapei Keracaulk Sanded Sealer AquaMix Sealer's Choice Gold Cleaner AquaMix Conc. Stone & Tile Cleaner Installation Instructions TCNA Handbook Layout No Dry Layout Recommended															
NOTES								1" x 3" CHEVRON MOSAIC 12 1/16" x 9 3/4" x 3/8" (0.82 sf) Polished							
*Variation: Calacatta Gold only - V3 Setting Material: Mapei Kerabond/Keralastic or Mapei Granirapid System.															

DOGE MOSAIC

Named for the Doge Palace, the fabulous home of the Dukes of Venice who ruled the republic during the height of its power, our Doge mosaic draws from the Cosmati style of opus sectile, or “cut work,” that originated in Rome before the Renaissance. A timeless pattern in seven distinct colorways, Doge is crafted from exquisite marble, polished or honed, and finished with a precision worthy of its proud heritage.




PICTURED: DOGE MOSAIC FETE PHOTOGRAPHED BY CHRISTOPHER KENT

DOGE MOSAIC




White Polished
Thassos & Calacatta Gold



Light Grey Polished
Thassos & Bianco Carrara



Fete Polished
Multi Blend




Black Polished
Nero & Statuary




Cream Honed
Vanilla Onyx & Bianco Dolomiti





Grigio Toscana Honed
Bianco Carrara & Grigio Toscana



White Blend Honed
Thassos & Calacatta Gold

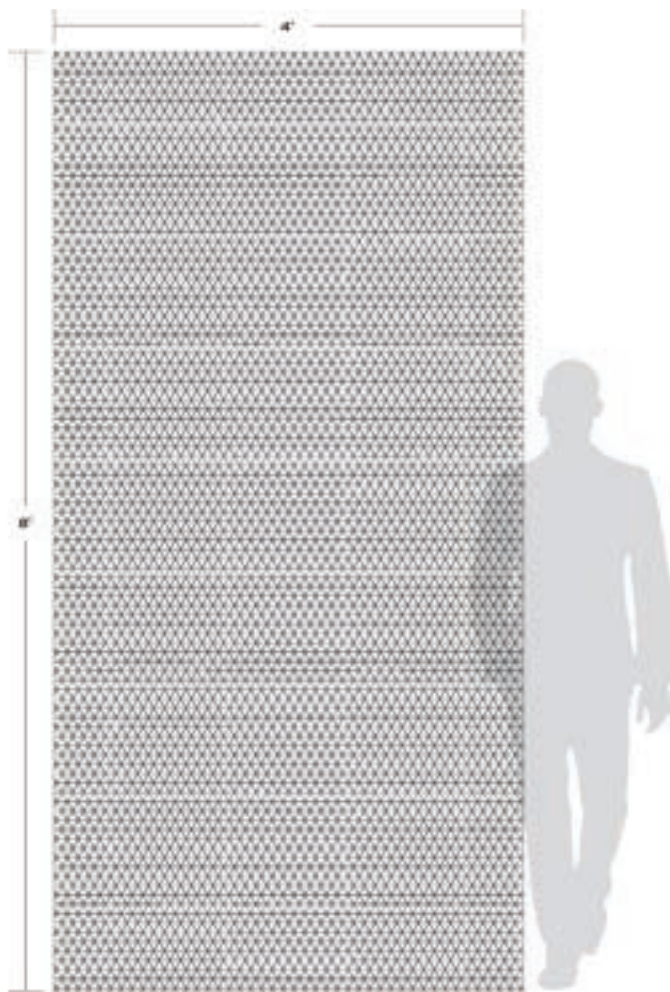

APPLICATIONS									VARIATION ⁷				TAILORED TO CUSTOMIZATION	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND					CARPET CUTTING FIELD FINISH MOSAIC SADDLE VANITY TOP WATERJET	
Light/ Medium Commercial	All	Yes, including steam ¹	Yes, including steam ²	No	Yes, non-freeze thaw ³	No	Yes	Yes						


INSTALLATION/MAINTENANCE										TRIANGLE MOSAIC	
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT		
Ardex X77 White Microtec Fiber Reinforced Mortar ⁴	Ardex FG-C Microtec Unsanded ⁵	As established on sheets	Ardex 8+9	Ardex SX	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook	Maintain sheet orientation	Required	12 1/8" x 11 7/16" x 3/8" (0.96 SF)	

NOTES	
¹ Shower Wall: Cream, Grigio Toscana- Conventional only	⁷ Variation : Doge Light Grey - V2
² Shower Floor: Cream - Conventional only, Grigio Toscana - No Ardex 100% Solids Epoxy Adhesive White is recommended for installing this product in shower floor applications.	Tech Notes: Product MUST be installed in accordance with current TCNA Handbook Stone Methods. Individual sheets of this mosaic are not square. Sheets are irregular and combine into a seamless interlocking pattern. Plan your layout accordingly. Dry laying of this product prior to installation is required. Pattern is directional, maintain sheet orientation during installation. For straight cuts on a tile wet saw clear plastic face tape can be applied to keep the mosaic pieces aligned while cutting. White mortar is recommended for natural stone. Seal and utilize a grout release prior to grouting.
³ Exterior Wall: Cream, Grigio Toscana - No, White Blend Honed - Yes, including freeze thaw	
⁴ Doge Fete, Grigio Toscana - Install with Ardex N23 White or Mapei Granirapid White	
⁴ Alternate Mortar: Ardex X4 White Tile & Stone Mortar	
⁵ Alternate Grout - Ardex DG 1 - One Component Grout	


12 1/8" x 11 7/16" x 3/8" (0.96 SF)

DOGE-INSTALLATION GUIDE

SINGLE UNIT

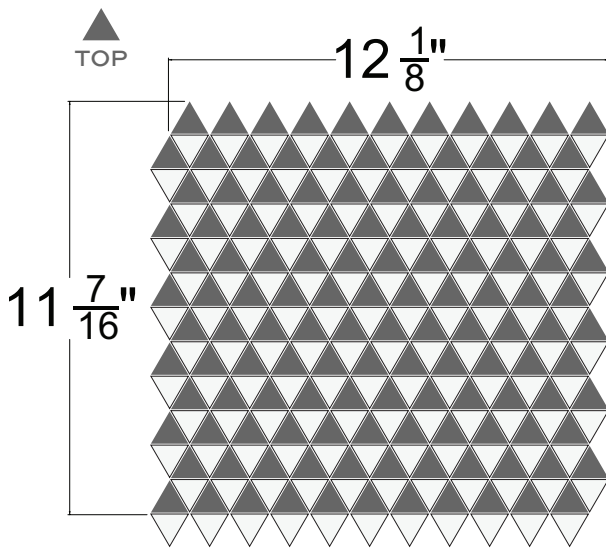


* PATTERN IS DIRECTIONAL, MAINTAIN SHEET ORIENTATION
* COLORED STONES SHOULD POINT UPWARDS



STRIDBLKMP



SSPQRDOGEMP



STRIDGGRLTMP




STRIDWHMP

STRIDCRMH




STRIDWHMH



STRIDGRIGTMH

UNITS IN REPEAT

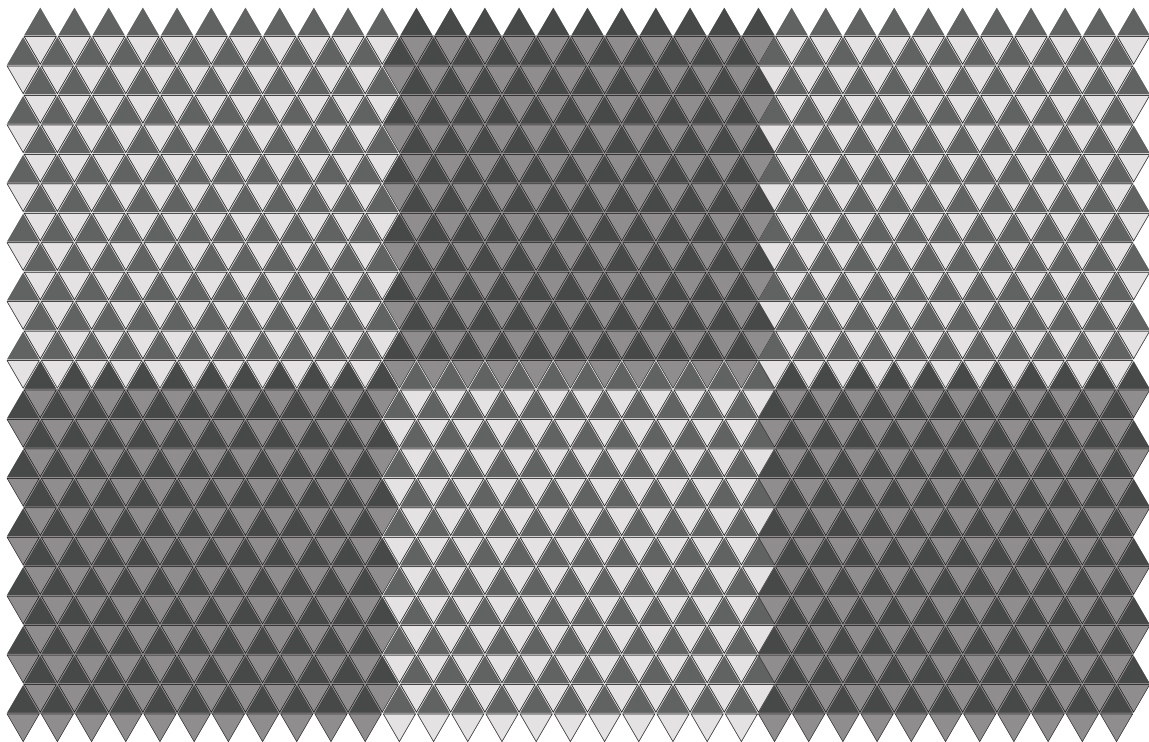

SETTING NATURAL STONE MOSAICS ON A SHOWER FLOOR WITH ARDEX 100% SOLIDS EPOXY ADHESIVE WHITE

ARDEX 100% Solids Epoxy Adhesive White is suitable for each of the following installation methods shown in the Shower Receptors section in the most current edition of TCNA Handbook for Ceramic, Glass, and Stone Tile Installation.

B414-24 Stone, B441-24 Stone, B415-24 Stone, B420-24 Stone,
B426-24 Stone, B431-24 Stone, B421-24 Stone, B422-24 Stone.

IMPORTANT NEXT STEPS:	IMPORTANT WATER CLEANUP STEPS
• Pour Part A (Resin) into Part B (Hardener) bucket and hand mix to achieve color blend. • Mix using a power mixer (approx. 650 RPM) for approx. 2 minutes. • Pour the entire mixture out of the bucket onto the floor or onto a scrape piece of tile. It is very important to get the entire mixture out of the bucket immediately. • Spread a thin layer of epoxy mortar with a flat trowel over a predetermined area of the shower floor. • Using a square notch trowel or a V-notch trowel, spread the epoxy mortar over the same predetermined shower floor area. • Next flatten out all trowel ridges with flat side of trowel striving to achieve 100% coverage over the predetermined shower floor area. • Place the interlocking mosaic sheets into mortar bed over the predetermined shower floor area for 100% coverage. • Tap down and level the mosaic sheets with a grout float over the predetermined area. • Allow mortar to set, harden, and cure.	• Wipe up any epoxy residue with sponges and clean water. • Note: No soap and no chemicals are needed. Just clean water. • Rinse sponges and change the water often. • Finally wipe with cool, clean water & clean sponges. • Use clean microfiber cloths for final wipe down.

Artistic Tile recommends sealing all natural stones before grouting.

ECHO GRAND

Echo Grand interprets the dramatic diamond ombré-like pattern of our Echo glass pattern in three luxurious marble colorways. The cascading succession on all three blends produces a complex ripple effect, showcasing an assortment of remarkable color tones. Stocked in Blue, Green, and Grey.



ECHO GRAND




Echo Grand Blue Polished
Azul Macubas, Mugwort, Azul Cielo, Statuary



Echo Grand Green Polished
Botanic Green, Ming Green, Statuary, Bianco Dolomiti



Echo Grand Grey Polished
Thassos, Statuary, Bianco Carrara, Bardiglio

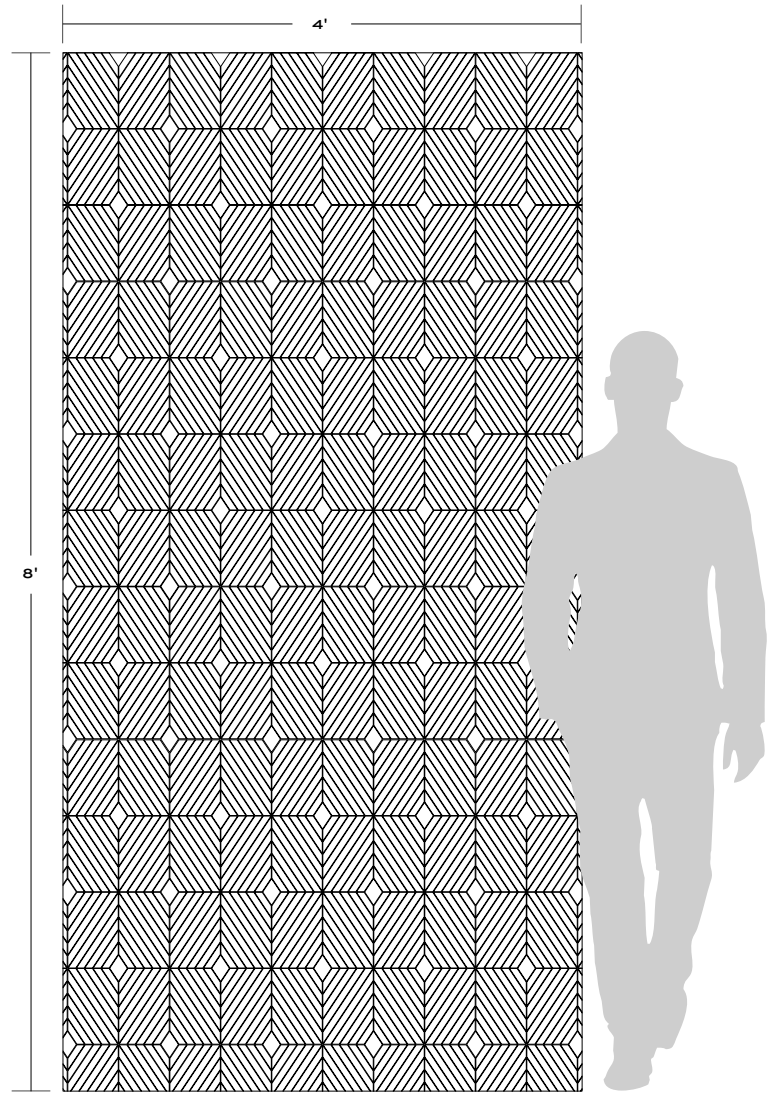

APPLICATIONS							
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP
Light/Med Traffic Commercial	All	Yes, including steam	Yes ¹	No	Yes, Non-Freeze Thaw	No	No

VARIATION			
V1	V2	V3	V4

INSTALLATION/MAINTENANCE									
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT
Ardex X4 White ²	Ardex FG-C Microtec Unsanded ³	As established on sheets	Ardex B + 9	Ardex SX	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook	Maintain sheet orientation	Sample ⁴

NOTES									
¹ Echo Grand Grey - Bardiglio is sensitive to water, including moisture and humidity. Pieces will darken over time in this environment. ² Alternate Mortar: Blue - Mapei Ultraflex 2 White or Mapei Kerabond W/ Keralastic Additive, Green - Mapei Grainrapid System, Grey - Mapei Grainrapid System, Kerabond W/ Keralastic Additive ³ Alternate Grout - Mapei Ultracolor Plus or Mapei Flexcolor CQ ⁴ Layout for overview of material before installation.									

MOSAIC
14 1/8" x 9 7/16" x 3/8" (0.9250 sf/unit) interlocking sheets

GIN FIZZ

A stirring concoction of Rosa Portogallo, Cipollino, Lilac and Thassos marble, Gin Fizz is both refreshing and intoxicatingly beautiful. Mix it up in your choice of ingredients with our Tailored-To program.



GIN FIZZ



Honed Stone Blend - Herringbone Mosaic
Rosa Portogallo, Cipollino, Lilac, and Thassos


APPLICATIONS									VARIATION	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND		
Commercial Light/ Medium	All	All	Yes	No	Yes, non-freeze thaw	No	Yes	Yes		
INSTALLATION/MAINTENANCE										FIELD TILE
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT	
Ardex X4 Tile & Stone ¹	Ardex FG-C Microtec Unsanded ²	As established on sheets	Mapei Mapelastick AquaDefense	Mapei Keracaulk Unsanded	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook ³	No	Required	
NOTES										
¹ Alternate mortar - Mapei Ultraflex 2 or Ardex N23 Microtec Rapid Set ² Alternate grout - Mapei Ultracolor Plus FA or Mapei Flexcolor CQ ³ IMPORTANT: Proper installation will prevent darkening due to water accumulation behind the product. Follow TCNA guidelines to ensure proper installation.										

GRAND HOTEL


Grand Hotel presents a modern rendition of a classic mosaic pattern, in fine hand-worked tesserae. Crafted from classic materials including Bianco Dolomiti, Bardiglio Nuvolato, Bianco Carrara, China Black, and Statuary, the pattern pays homage to the grand hotels of Italy. Stocked in 10" x 10 ¾" interlocking sheets.



GRAND HOTEL

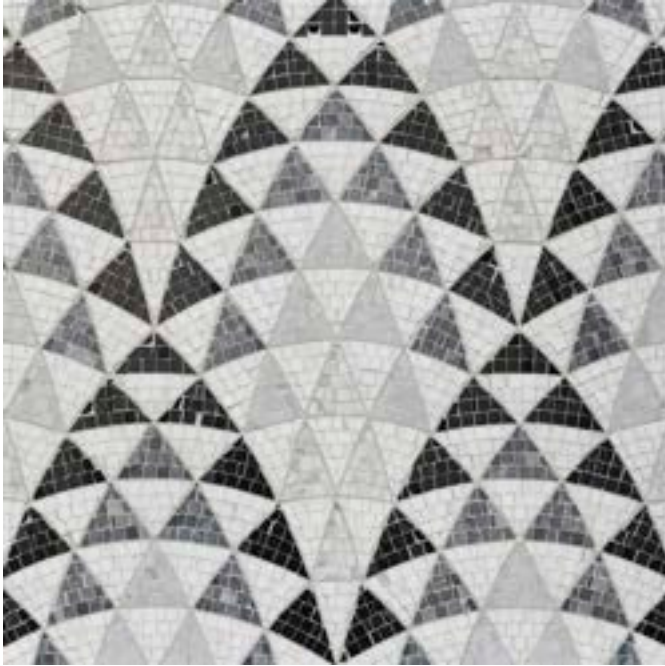

Polished

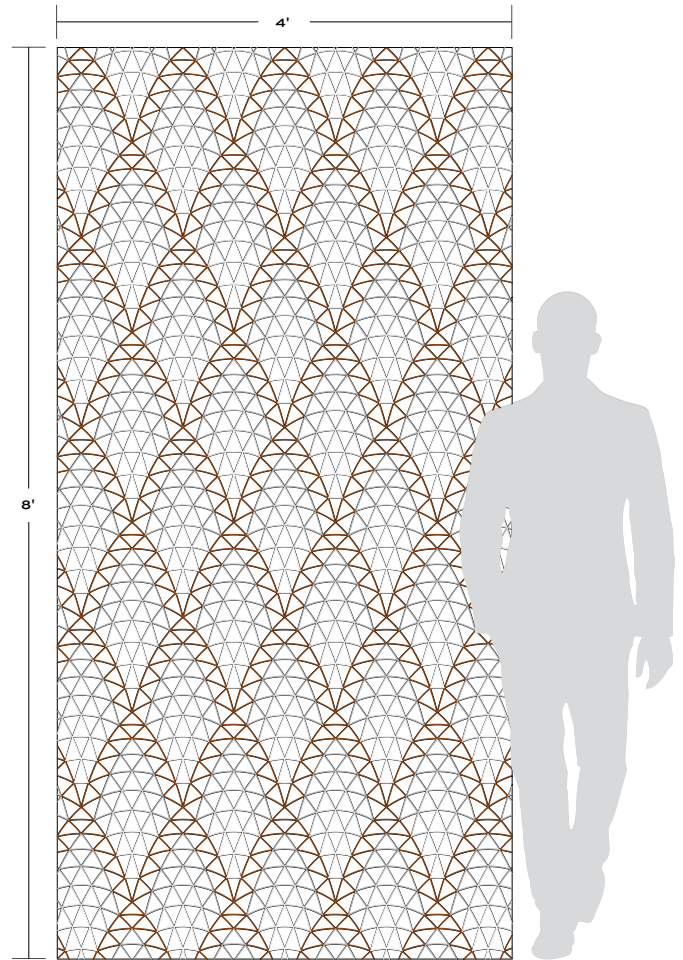

APPLICATIONS									VARIATION	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1 V2 V3 V4	
Light/Med Traffic Commercial	All	Yes, Conventional Only	Yes ¹	No	No	No	Yes	Yes		

INSTALLATION/MAINTENANCE										MOSAIC
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT	10" x 10 3/4" x 3/8" (0.74 sf/unit) Interlocking sheets
Ardex N23 Microtec Rapid Set ²	Mapei Keracolor Sanded ³	As established on sheets	Ardex 8 + 9	Ardex SX	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook ⁴	Maintain sheet orientation	Sample ⁵	

NOTES									
¹ Bardiglio is sensitive to water, including moisture and humidity. Pieces will darken over time in this environment. ² Alternate Mortar - Mapei Granirapid 2-Part System ³ Alternate Grout - Ardex FL Rapid Set Sanded, Mapei Flexcolor CQ Fractures in the delicate features of this mosaic are inherent and should not be regarded as defects or prevent installation. The final installation will have an authentic appearance. A grout color matching the mosaic background may be chosen to minimize the appearance of the fractures. ⁴ IMPORTANT: Proper installation will prevent darkening due to water accumulation behind the product. Follow TCNA guidelines to ensure proper installation. ⁵ Layout for overview of material before installation. Tech Note: The installation of intricate mosaic patterns may require the use of a mosaic nipper to hand cut pieces along the edge to fit, or conduct repairs throughout the installation.									

HANDLOOM

Inspired by the timeless appeal of stripes and plaids, our Handloom collection offers three distinct patterns for countless design possibilities. Double Check showcases an intricate tumbled 3x3 design, where two-tone checks gracefully intertwine, while Shadow Stripe weaves together small mosaic chips with a bold, thicker stripe at its center. Windowpane Plaid presents an elegant checkerboard of varied rectangles. All three interpretations of classic patterns are stocked in Pink, Moca, and Viola colorways, combining soft, luxurious stones like Rosa Perlino, Calacatta Gold, Bianco Antico, Belgian Blue, and Viola, in serene, understated palettes.



HANDLOOM


DOUBLE CHECK




Double Check Moca



Double Check Pink



Double Check Viola

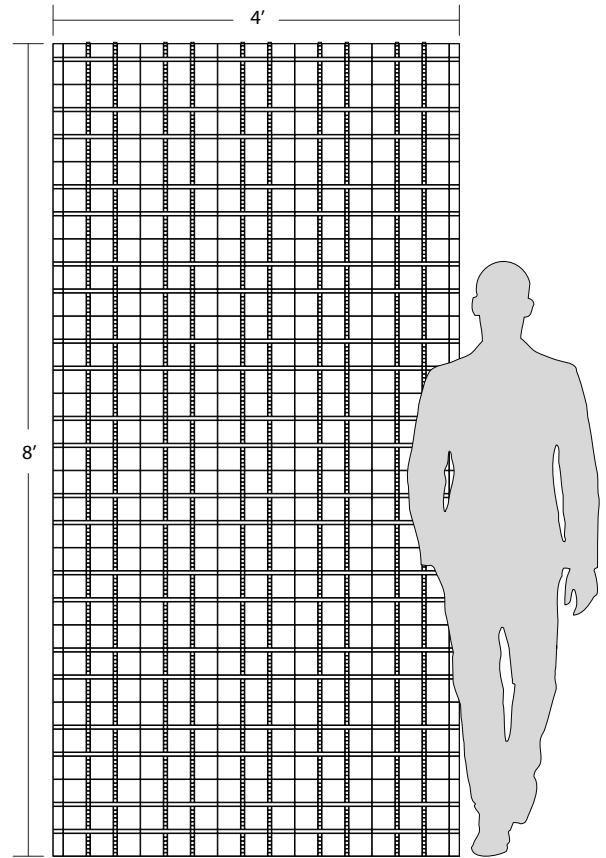

APPLICATIONS									VARIATION		TAILORED TO CUSTOMIZATION
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1	V2	
Light/Medium Commercial	All	Conventional Only ¹	Yes, conventional only ²	No	Yes, non-freeze thaw	No	Yes	Yes			

INSTALLATION/MAINTENANCE									
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT
Ardex N23 White Microtec Rapid Set ³	Ardex FG-C Microtec Unsanded ⁴	As established on sheets	Ardex 8 + 9	Ardex SX	Aquamix Sealers Choice Gold	AquaMix Concentrated Cleaner	TCNA Handbook	Maintain Sheet Orientation	Recommended

NOTES
¹ Showers: Product MUST be installed in accordance with current TCNA Handbook Stone Methods. ² Shower Floors: Ardex 100% Solids Epoxy Adhesive White is recommended for installing this product in shower floor applications. See complete install instructions for further details. ³ Alternate Setting Materials: Ardex X77 White Microtec Fiber Reinforced Mortar, Ardex 100% Solids Epoxy Adhesive White ⁴ Alternate Grout: Ardex FL Rapid Set Sanded, Ardex DG 1 - One Component Grout Tech Note: Individual sheets of this mosaic are not square. Sheets are irregular and combine into a seamless interlocking pattern. Plan your layout accordingly. Dry laying of this product prior to installation is required. White mortar is recommended for natural stone. The installation of intricate mosaic patterns may require the use of a mosaic nipper to hand cut pieces along the edge to fit or conduct adjustments throughout the installation. For straight cuts on a tile wet saw clear plastic face tape can be applied to keep the mosaic pieces aligned while cutting. Seal and utilize a grout release prior to grouting.


WATERJET MOSAIC
0.5703 SF/PC Interlocking Sheet Tumbled Stone Mosaic

HANDLOOM

WINDOWPANE PLAID




Windowpane Plaid Pink



Windowpane Plaid Viola



Windowpane Plaid Moca

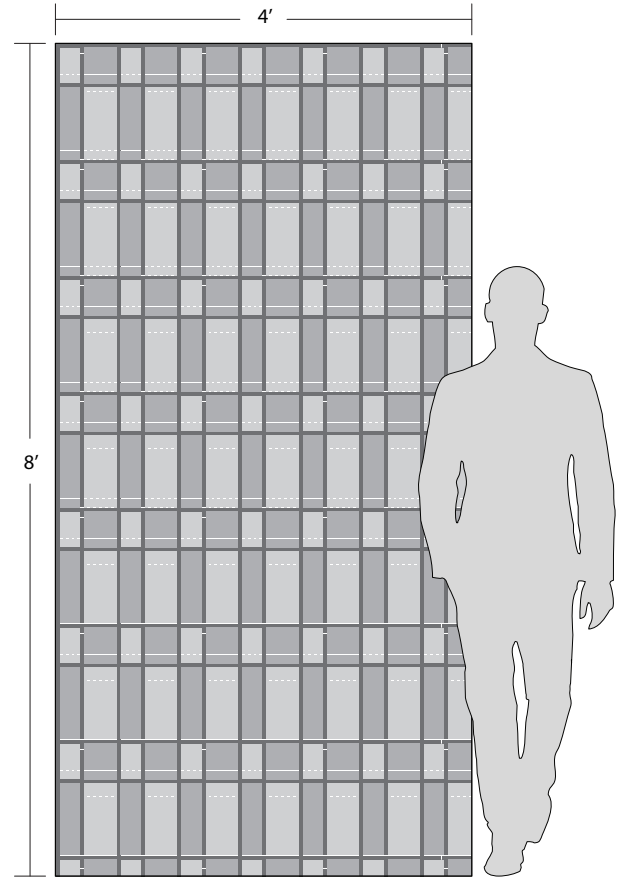

APPLICATIONS									VARIATION				TAILORED TO CUSTOMIZATION
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1 V2 V3 V4				
Light/Medium Commercial	All	Conventional Only ¹	Yes, conventional only ²	No	Yes, non-freeze thaw	No	Yes	Yes					


INSTALLATION/MAINTENANCE									
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT
Ardex N23 White Microtec Rapid Set ³	Ardex FG-C Microtec Unsanded ⁴	As established on sheets	Ardex 8 + 9	Ardex SX	Aquamix Sealers Choice Gold	AquaMix Concentrated Cleaner	TCNA Handbook	Maintain Sheet Orientation	Recommended

NOTES
¹ Showers: Product MUST be installed in accordance with current TCNA Handbook Stone Methods. ² Shower Floors: Ardex 100% Solids Epoxy Adhesive White is recommended for installing this product in shower floor applications. See complete install instructions for further details. ³ Alternate Setting Material: Ardex X77 White Microtec Fiber Reinforced Mortar, Ardex 100% Solids Epoxy Adhesive White ⁴ Alternate Grout: Ardex FL Rapid Set Sanded, Ardex DG 1 - One Component Grout Tech Note: Individual sheets of this mosaic are not square. Sheets are irregular and combine into a seamless interlocking pattern. Plan your layout accordingly. Dry laying of this product prior to installation is required. White mortar is recommended for natural stone. The installation of intricate mosaic patterns may require the use of a mosaic nipper to hand cut pieces along the edge to fit or conduct adjustments throughout the installation. For straight cuts on a tile wet saw clear plastic face tape can be applied to keep the mosaic pieces aligned while cutting. Seal and utilize a grout release prior to grouting.

WATERJET MOSAIC
1.3589 SF/PC Interlocking Sheet
Tumbled Stone Mosaic

HANDLOOM

SHADOW STRIPE




Shadow Stripe Viola



Shadow Stripe Pink



Shadow Stripe Moca

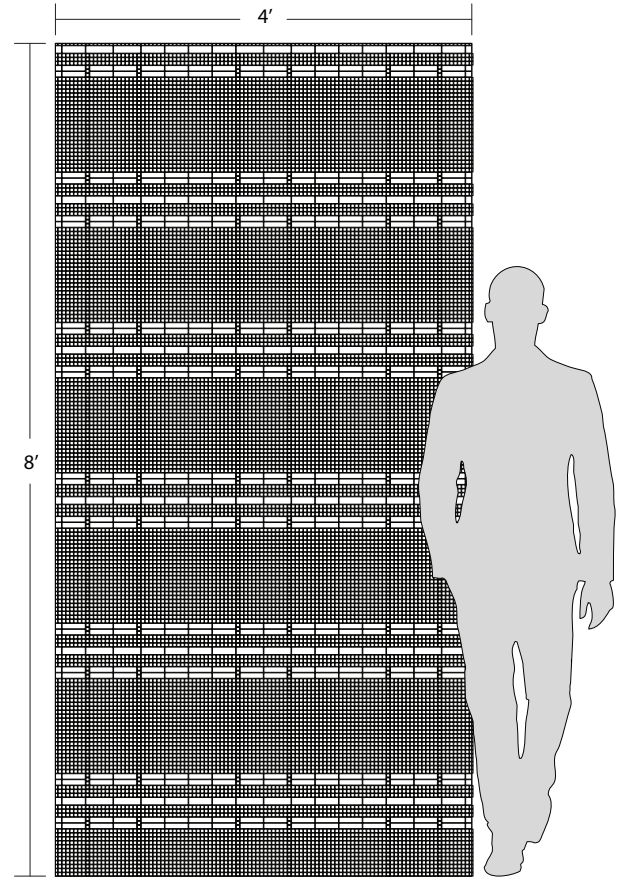

APPLICATIONS									VARIATION		TAILORED TO CUSTOMIZATION
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1	V2	
Light/Medium Commercial	All	Conventional Only ¹	Yes, conventional only ²	No	Yes, non-freeze thaw	No	Yes	Yes			
											CARPET CUTTING
											FIELD
											FINISH
											MOSAIC
											SADDLE
											VANITY TOP
											WATERJET

INSTALLATION/MAINTENANCE									
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT
Ardex N23 White Microtec Rapid Set ³	Ardex FG-C Microtec Unsanded ⁴	As established on sheets	Ardex 8 + 9	Ardex SX	Aquamix Sealers Choice Gold	AquaMix Concentrated Cleaner	TCNA Handbook	Maintain Sheet Orientation	Recommended

NOTES
¹ Showers: Product MUST be installed in accordance with current TCNA Handbook Stone Methods. ² Shower Floors: Ardex 100% Solids Epoxy Adhesive White is recommended for installing this product in shower floor applications. See complete install instructions for further details. ³ Alternate Setting Material: Ardex X77 White Microtec Fiber Reinforced Mortar, Ardex 100% Solids Epoxy Adhesive White ⁴ Alternate Grout: Ardex FL Rapid Set Sanded, Ardex DG 1 - One Component Grout Tech Note: Individual sheets of this mosaic are not square. Sheets are irregular and combine into a seamless interlocking pattern. Plan your layout accordingly. Dry laying of this product prior to installation is required. White mortar is recommended for natural stone. The installation of intricate mosaic patterns may require the use of a mosaic nipper to hand cut pieces along the edge to fit or conduct adjustments throughout the installation. For straight cuts on a tile wet saw clear plastic face tape can be applied to keep the mosaic pieces aligned while cutting. Seal and utilize a grout release prior to grouting.

WATERJET MOSAIC
2.0814 SF/PC Interlocking Sheet Tumbled Stone Mosaic

SETTING NATURAL STONE MOSAICS ON A SHOWER FLOOR WITH ARDEX 100% SOLIDS EPOXY ADHESIVE WHITE

ARDEX 100% Solids Epoxy Adhesive White is suitable for each of the following installation methods shown in the Shower Receptors section in the most current edition of TCNA Handbook for Ceramic, Glass, and Stone Tile Installation.

B414-24 Stone, B441-24 Stone, B415-24 Stone, B420-24 Stone,
B426-24 Stone, B431-24 Stone, B421-24 Stone, B422-24 Stone.

IMPORTANT NEXT STEPS:	IMPORTANT WATER CLEANUP STEPS
• Pour Part A (Resin) into Part B (Hardener) bucket and hand mix to achieve color blend. • Mix using a power mixer (approx. 650 RPM) for approx. 2 minutes. • Pour the entire mixture out of the bucket onto the floor or onto a scrape piece of tile. It is very important to get the entire mixture out of the bucket immediately. • Spread a thin layer of epoxy mortar with a flat trowel over a predetermined area of the shower floor. • Using a square notch trowel or a V-notch trowel, spread the epoxy mortar over the same predetermined shower floor area. • Next flatten out all trowel ridges with flat side of trowel striving to achieve 100% coverage over the predetermined shower floor area. • Place the interlocking mosaic sheets into mortar bed over the predetermined shower floor area for 100% coverage. • Tap down and level the mosaic sheets with a grout float over the predetermined area. • Allow mortar to set, harden, and cure.	• Wipe up any epoxy residue with sponges and clean water. • Note: No soap and no chemicals are needed. Just clean water. • Rinse sponges and change the water often. • Finally wipe with cool, clean water & clean sponges. • Use clean microfiber cloths for final wipe down.

Artistic Tile recommends sealing all natural stones before grouting.

HEXAGON MOSAIC

Our exquisite Hexagon Mosaics are crafted from a captivating array of natural stone options. Elevate your space with the timeless allure of these stunning tiles, meticulously designed to infuse elegance and sophistication into any room. Currently stocked in 3cm and 5cm sizes.



HEXAGON MOSAIC


Hexagon 5.0 cm



Invisible Grey
Honed



Verde Reale Classico
Honed



Viola Reale
Honed


Hexagon 3.0 cm



Volakas
Honed



Thassos
Polished



Textura Bianco Carrara
Mixed Finish



Statuary
Polished



Pacific White
Polished



Rivershell White
Polished



Bianco Carrara
Polished & Honed



Calacatta Bluette-
Honed



China Black
Polished



White Sand
Polished



Bianco Dolomiti
Polished




Arabescato D'Oro
Honed



Calacatta Gold
Polished & Honed



Lilac
Honed

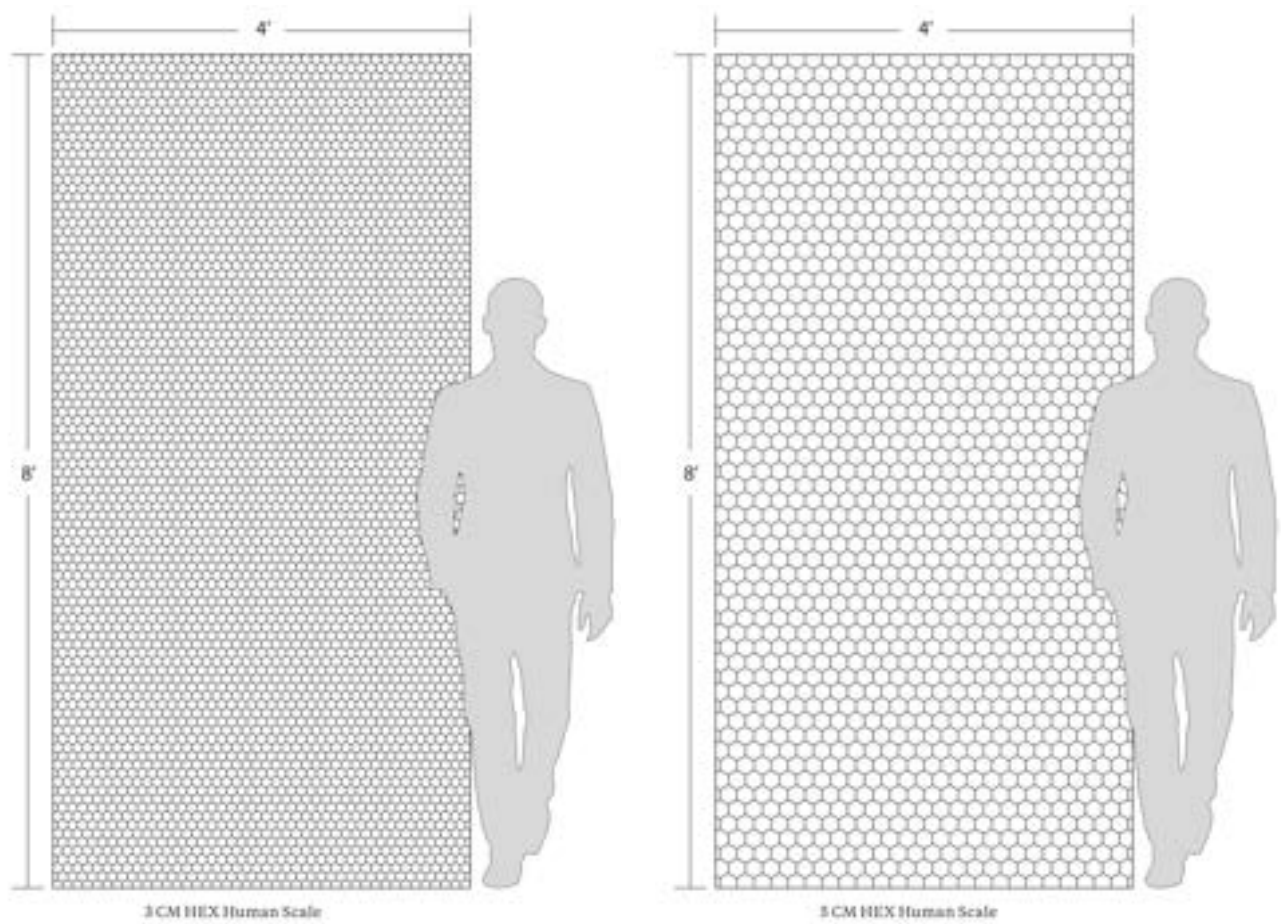

APPLICATIONS									VARIATION		TAILORED TO CUSTOMIZATION
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1 V2 V3 V4		CARPET CUTTING FIELD FINISH MOSAIC SADDLE VANITY TOP WATERJET
Light/Medium Traffic Commercial	All	Yes, including steam ¹	Yes, including steam	No	No	No	Yes	Yes			

INSTALLATION/MAINTENANCE										
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT	QR CODE
Ardex X4 White Tile & Stone Mortar ²	Ardex FG-C Microtec Unsanded ¹	1/16" minimum	Ardex 8 + 9 ⁴	Ardex SX Silicone Sealant ³	AquaMix Sealer's Choice Gold	AquaMix Concentrated Cleaner	TCNA Handbook	No	Recommended	

NOTES
¹ Shower - Product must be installed in accordance with current TCNA Handbook Stone Methods. ² Mortar - For Thassos, Verde Reale, Viola Reale and Pacific White use Ardex X77 White Microtec Fiber Reinforced Mortar. For Calacatta Bluette use Ardex N23 White Microtec Rapid Set. ³ Caulk - For China Black, Calacatta Gold, Rivershell White, and Statuary use Mapei Keracaulk Siliconized Acrylic Caulk. For Verde Real Classico use Ardex SX Silicone Sealant. ⁴ Membrane - For China Black, Calacatta Gold, Rivershell White, and Statuary use Mapei Mapelastac AquaDefense. Technote: Sheets are irregular and combine into a seamless interlocking pattern. Plan your layout accordingly. White mortar is recommended for natural stone. For Arabescato D'oro and Thassos install with white thinset only. If job requires mud work, white portland cement must be used. China Black will exhibit surface scratching when used on floors, and in wet areas may discolor slightly due to soap residue or mineral deposits. For Calacatta Bluette install with Ardex N23 White or Mapei Granirapid White System. Do not install with organic adhesive, or in areas with rising moisture. Consider the use of a waterproofing membrane

AVAILABLE SIZE SIZES
3CM HEX MOSAIC SHEET SIZE 11-3/8" x 12" x 3/8" 0.96 SF/PC
5CM HEX MOSAIC SHEET SIZE 11-7/8" x 10-1/4" x 3/8" 0.84 SF/PC

HIP 2B STONE


Inspired by our Jazz Glass pattern, Hip 2B Stone beautifully showcases a classic mosaic pattern of tonal bands in alternating colors. Hip 2B Stone Black & Blue is composed of sequential bands of Silver Wave, Blue Travertine, Azul Cielo, and Thassos in each square. Hip 2B Stone Grey is designed with Bianco Carrara, Statuary, and Bianco Dolomiti, bringing a spectrum of grey tones to life.




HIP 2B STONE



Black and Blue Honed Mosaic
Silver Wave, Chinese Blue Travertine, Azul Cielo, Thassos

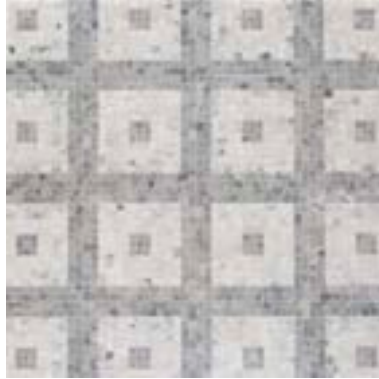

Grey Honed Mosaic
Bianco Carrara, Statuary, Bianco Dolomiti

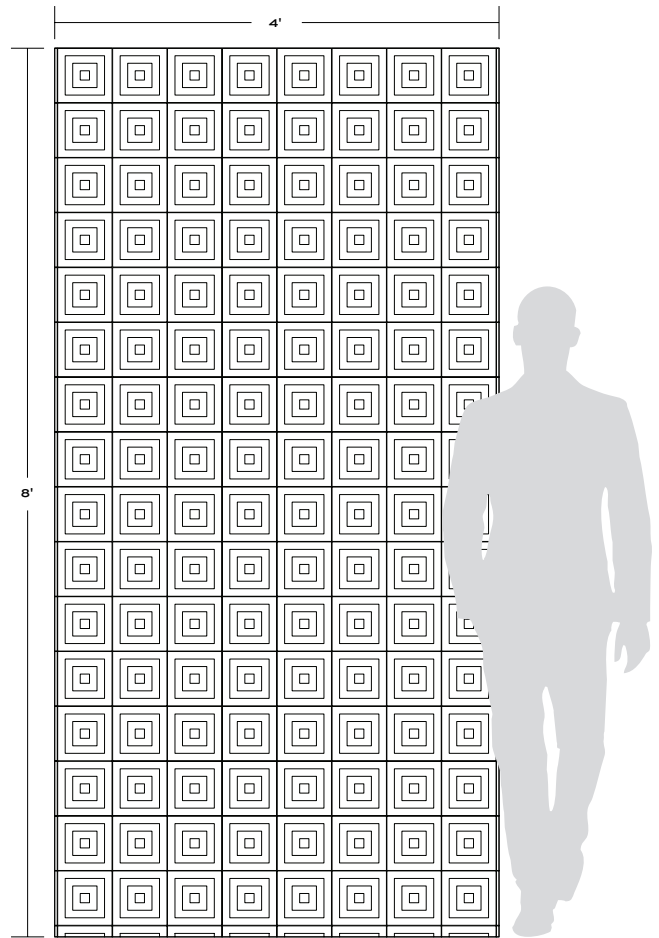

APPLICATIONS								
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND
Light/Med Traffic Commercial	All	All	Yes	No	Yes, Non-Freeze Thaw	No	Yes	Yes

VARIATION			
V1 V2 V3 V4			

INSTALLATION/MAINTENANCE									
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT
Ardex X4 White ¹	Ardex FG-C Microtec Unsanded ²	As established on sheets ³	Ardex 8 + 9	Ardex SX	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook ⁴	Maintain sheet orientation	Sample ⁵

NOTES
¹ Alternate mortar - Mapei Ultraflex 2 White or Mapei Kerabond W/ Keralastic Additive ² Alternate grout - Mapei Keracolor Unsanded or Mapei Ultracolor Plus FA ³ Ensure sheet installation spacing blends with internal grout joints. ⁴ IMPORTANT: Proper installation will prevent darkening due to water accumulation behind the product. Follow TCNA guidelines to ensure proper installation. ⁵ Layout for overview of material before installation.

MOSAIC
5 15⁄16" x 5 15⁄16" x 3⁄8" (0.24 sf/pc) Sold in full boxes only


HUDSON COLLECTION

The inventive energy of New York—the city by the Hudson—is evoked in this collection of fresh geometric mosaics. Hudson Check, available in Black, White, Pink, and Vanilla Onyx, is a simple but sophisticated windowpane plaid, given accent by a single square “dot” of contrasting stone at each main intersection. Hudson Hex, available in Black and White, is unique, with square tesserae pieces in differing colors and orientation creating a hexagonal mosaic for a modern take on a traditional form. Hudson Key, available in Black and White, is inspired by the utterly classic motif—the Greek Key, as a mosaic liberated from the pattern’s traditional use as a border, perfect for an entire wall or floor.




PICTURED: HUDSON CHECK VANILLA ONYX

HUDSON COLLECTION

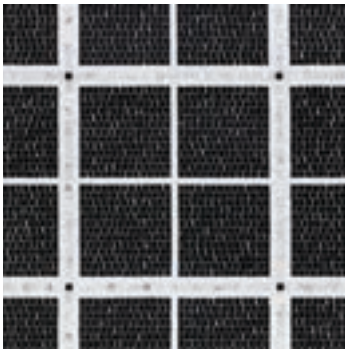

CHECK BLACK
China Black, Thassos, Statuary

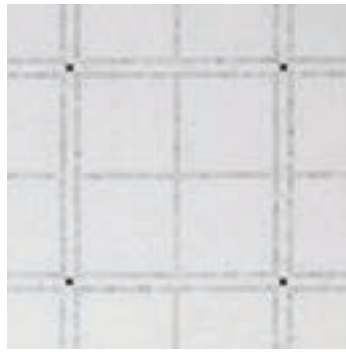


CHECK WHITE
Thassos, Bianco Carrara, Bianco Dolomiti, China Black



CHECK PINK
White Sand, Vanilla Onyx, Rosa Perlino, Pink Travertine




CHECK VANILLA ONYX
Vanilla Onyx, Thassos, Smoke

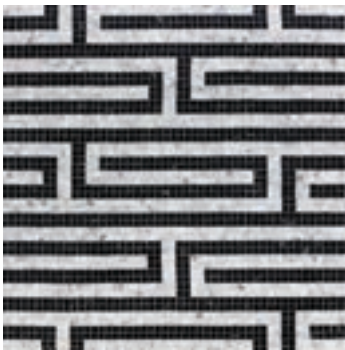

KEY BLACK
China Black, Statuary



KEY WHITE
Bianco Carrara, Thassos

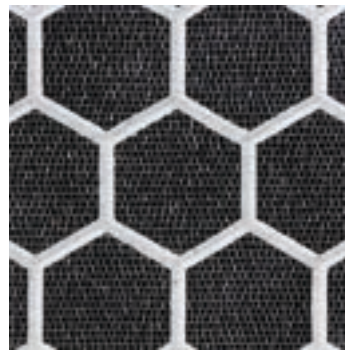

HEX BLACK
China Black, Thassos, Bianco Carrara




HEX WHITE
Bianco Carrara, Thassos, Bardiglio Nuvolato


APPLICATIONS									VARIATION		TAILORED TO CUSTOMIZATION	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND			CARPET CUTTING	
Commercial Light/ Medium	All	Yes, including steam ¹	Yes, including steam ²	No	No ³	No	Yes	Yes			FIELD	
											FINISH	
											MOSAIC	
											SADDLE	
VANITY TOP												
WATERJET												
INSTALLATION/MAINTENANCE										MOSAIC		
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT	CHECK 11 13/16" x 11 3/4" x 3/8" (0.96 sf/unit) HEX 6 7/8" x 7 15/16" x 3/8" (0.37 sf/unit) KEY 23 5/8" x 18 7/8" x 3/8" (3.09 sf/unit) Mesh mounted interlocking sheets		
Ardex X77 White Microtec Fiber Reinforced Mortar ⁴	Ardex FG-C Microtec Unsanded ⁵	As established on sheets	Ardex 8+9	Ardex SX	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook	Maintain sheet orientation	Required			
NOTES												
¹ Check Vanilla Onyx, Hex White - Conventional only ² Check Vanilla Onyx - Conventional only, Hex White - No ³ Key White and Key Black - Yes, non-freeze thaw ⁴ Hex White - Ardex N23 White Microtec Rapid Set Alternate Setting Materials: Ardex X4 White Tile & Stone Mortar or Ardex 100% Solids Epoxy Adhesive White. Alternate setting material for Hex White - Mapei Granirapid White 2-Part System ⁵ Alternate Grout: Ardex DG 1 - One Component Grout or Mapei Keracolor Unsanded Alternate grout for Hex White: Mapei Ultracolor Plus FA or Mapei Keracolor Unsanded						Tech Notes: Product MUST be installed in accordance with current TCNA Handbook Stone Methods. Individual sheets of this mosaic are not square. This is a handmade product and sheets are irregular and combine into a seamless interlocking pattern. Pattern is directional, maintain sheet orientation during installation. For straight cuts on a tile wet saw clear plastic face tape can be applied to keep the mosaic pieces aligned while cutting. White mortar is recommended for natural stone. Seal and utilize a grout release prior to grouting.						

HUDSON COLLECTION


CHECK

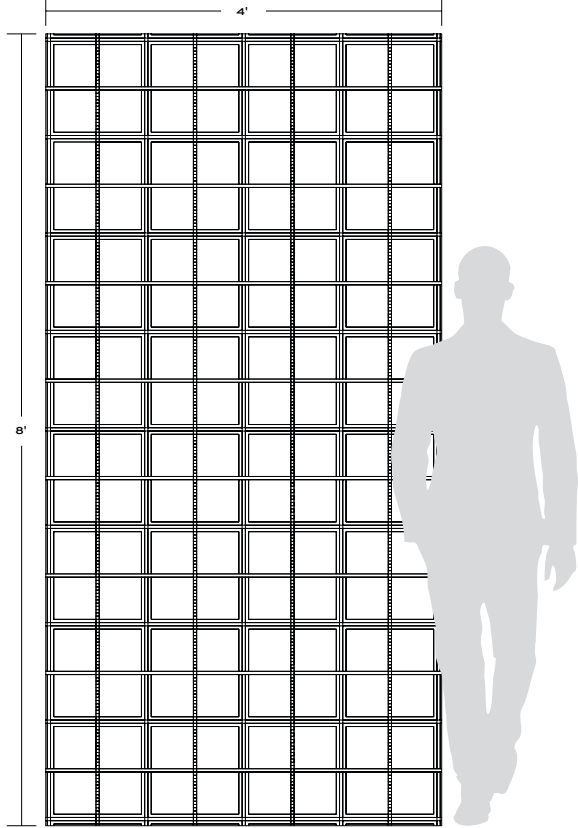

KEY

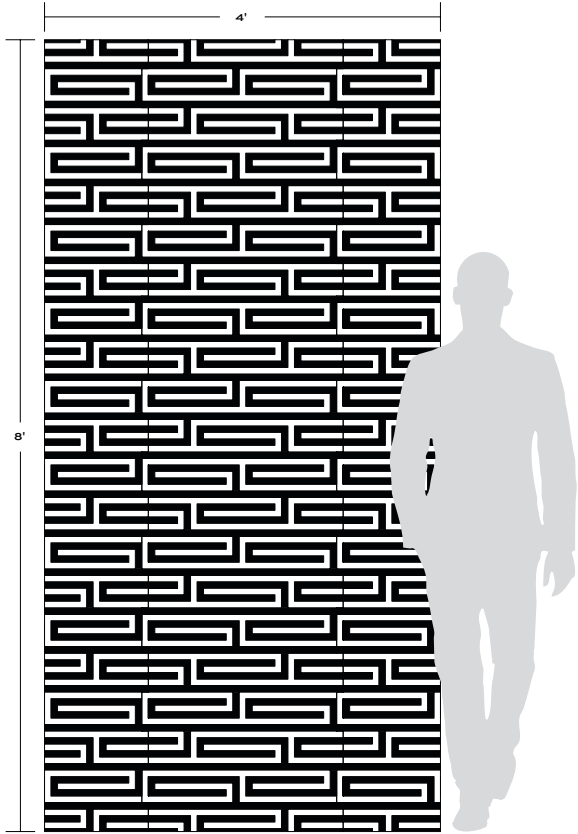

HEX

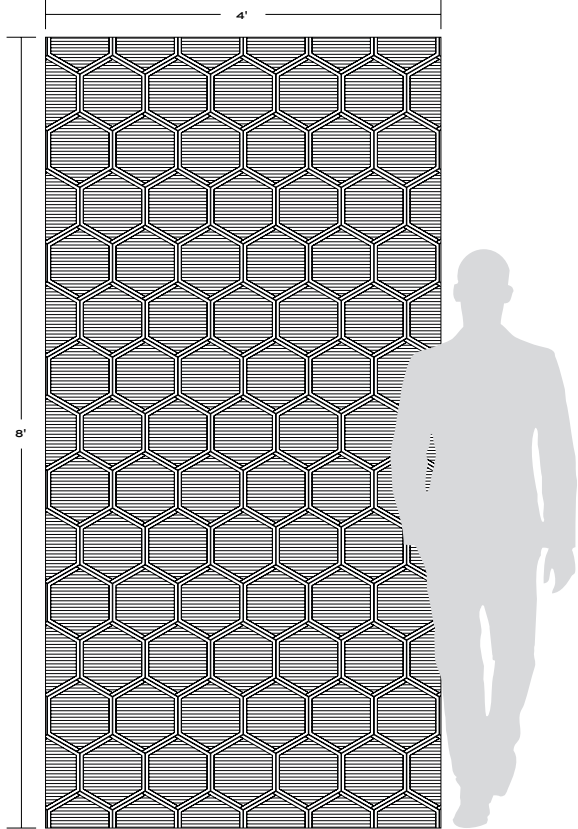

SETTING NATURAL STONE MOSAICS ON A SHOWER FLOOR WITH ARDEX 100% SOLIDS EPOXY ADHESIVE WHITE

ARDEX 100% Solids Epoxy Adhesive White is suitable for each of the following installation methods shown in the Shower Receptors section in the most current edition of TCNA Handbook for Ceramic, Glass, and Stone Tile Installation.

B414-24 Stone, B441-24 Stone, B415-24 Stone, B420-24 Stone,
B426-24 Stone, B431-24 Stone, B421-24 Stone, B422-24 Stone.

IMPORTANT NEXT STEPS:	IMPORTANT WATER CLEANUP STEPS
• Pour Part A (Resin) into Part B (Hardener) bucket and hand mix to achieve color blend. • Mix using a power mixer (approx. 650 RPM) for approx. 2 minutes. • Pour the entire mixture out of the bucket onto the floor or onto a scrape piece of tile. It is very important to get the entire mixture out of the bucket immediately. • Spread a thin layer of epoxy mortar with a flat trowel over a predetermined area of the shower floor. • Using a square notch trowel or a V-notch trowel, spread the epoxy mortar over the same predetermined shower floor area. • Next flatten out all trowel ridges with flat side of trowel striving to achieve 100% coverage over the predetermined shower floor area. • Place the interlocking mosaic sheets into mortar bed over the predetermined shower floor area for 100% coverage. • Tap down and level the mosaic sheets with a grout float over the predetermined area. • Allow mortar to set, harden, and cure.	• Wipe up any epoxy residue with sponges and clean water. • Note: No soap and no chemicals are needed. Just clean water. • Rinse sponges and change the water often. • Finally wipe with cool, clean water & clean sponges. • Use clean microfiber cloths for final wipe down.

Artistic Tile recommends sealing all natural stones before grouting.

INTERLACE

A playful and modern twist on the classic basketweave. White Sand marble forms the backdrop for Interlace's two distinct colorways; Lilac, a subtle tapestry woven with plum-veined marble, and Red Travertine, a warm, rustic blend offering color and contrast. The interplay of these stones marries timeless elegance and contemporary design, creating a sophisticated, textile-inspired mosaic. Each 8-11/64" x 8-11/64" tile features a honed finish.




INTERLACE




Red Travertine - Honed



Lilac - Honed

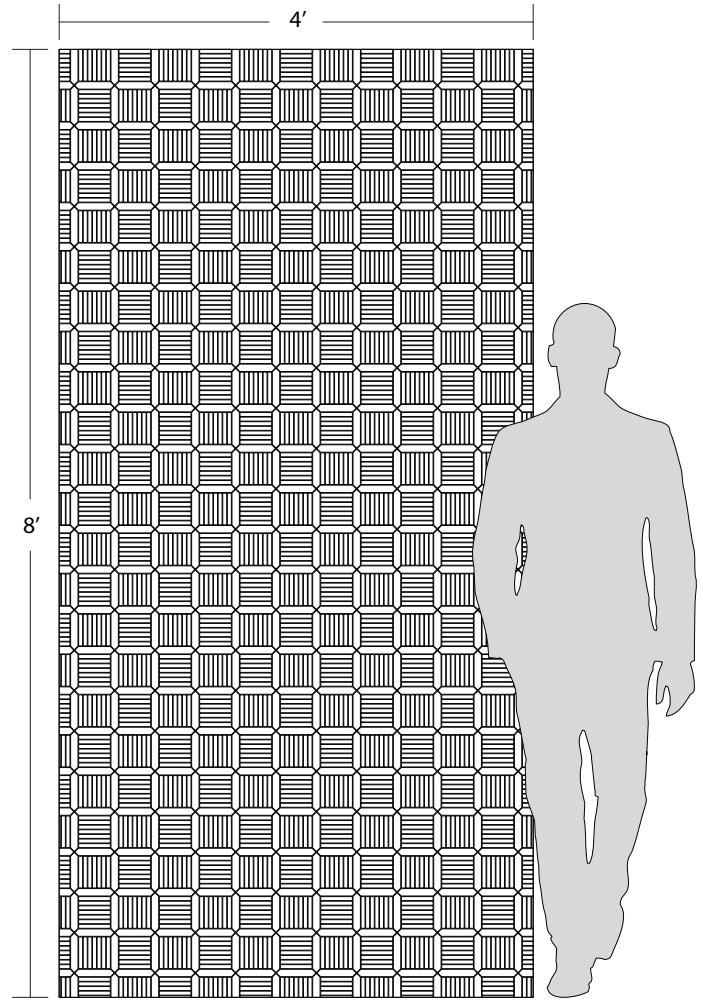

APPLICATIONS									VARIATION ²				TAILORED TO CUSTOMIZATION	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1 V2 V3 V4				CARPET CUTTING	
Light/ Medium Commercial	All	Yes, including steam ¹	Yes, including steam ¹	No	Yes, non freeze thaw	No	Yes	Yes					FIELD	
													FINISH	
													MOSAIC	
													SADDLE	
													VANITY TOP	
													WATERJET	
INSTALLATION/MAINTENANCE											MOSAIC			
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT	QR CODE				
Ardex X77 White Microtec Fiber Reinforced Mortar ³	Ardex FG-C Microtec Unsanded ⁴	As established on sheets	Ardex 8+9	Ardex SX	AquaMix Sealers Choice Gold	AquaMix Concentrated Cleaner	TCNA Handbook	Maintain Sheet Orientation	Required					
NOTES														
¹ Shower: Product must be installed in accordance with current TCNA Handbook Stone Methods. ² Red Travertine Interlace is V2. ³ Alternate Mortar - Mapei Kerabond White w/Keralastic Additive or Ardex WA Epoxy ⁴ Alternate Grout - Mapei Ultracolor Plus FA or Ardex FL Rapid Set Sanded Tech Notes: Individual sheets of this mosaic are not square. Sheets are irregular and combine into a seamless interlocking pattern. Plan your layout accordingly. Pattern is directional, maintain sheet orientation during installation. White mortar is recommended for natural stone.														
											 8 11/64" x 8 11/64" x 3/8" (0.4636 SF/PC) Honed			

INVISIBLE BLUE


A sophisticated, variegated marble with a shimmering pale blue background traced with soft grey veins and bold swathes of golden taupe and graphite. Stocked in 2cm (3/4") polished slabs, honed 12" x 24" field tile and a unique trapezoidal mosaic, also honed.



SHOWN: INVISIBLE BLUE SLAB, TRAPEZOID MOSAIC & SMOKE STONE FIELD TILE

INVISIBLE BLUE


12" × 24" Field Tile


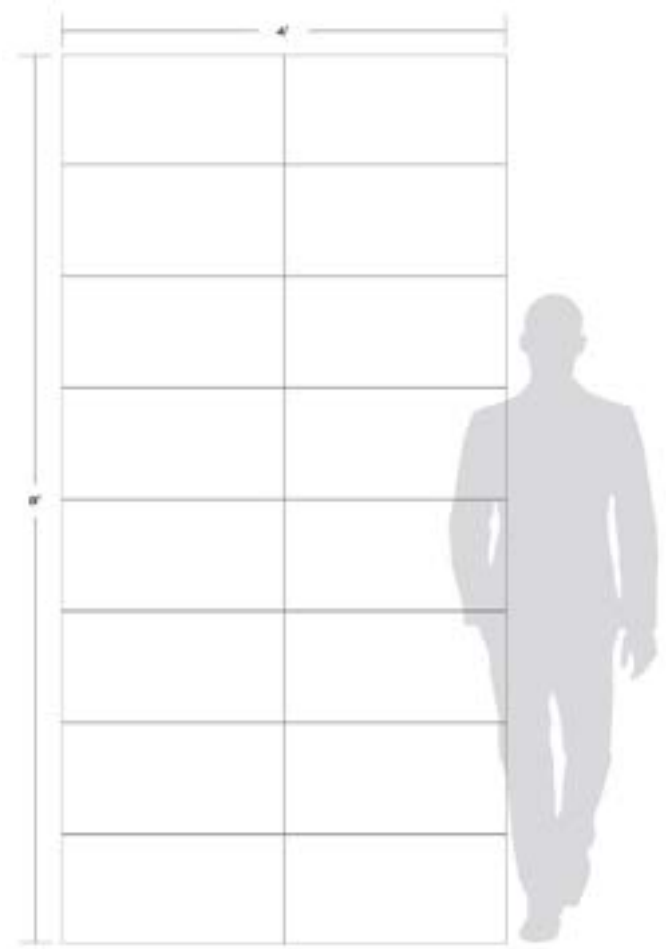


APPLICATIONS									VARIATION				TAILORED TO CUSTOMIZATION	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1 V2 V3 V4				CARPET CUTTING	FIELD
Light Traffic Residential	All excluding showers	Conventional Only	No	No	No	No	Yes	Yes					FINISH	MOSAIC
													SADDLE	VANITY TOP
													WATERJET	
INSTALLATION/MAINTENANCE										STONE				
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT					
Mapei Kerapoxy 410	Mapei Ultracolor Plus FA ¹	1/16" Min.	Mapei Mapelastick AquaDefense	Mapei Keracaulk Sanded	AquaMix Sealers Choice Gold	AquaMix Concentrated Cleaner	TCNA Handbook ²	No	Required	12" x 24" x 1/2" (2 sf/unit) Honed Field Tile Aris Edge				
NOTES														
¹ Alternate Grout - Ardex FG-C Microtec Unsanded ² Slab - NSI DSDM. The NSI recommends installing resin-backed stone with epoxy-based setting materials. Consult your setting materials manufacturer for specific recommendations.										2CM (3/4") Polished Slab				
Tech Notes: Epoxy fill is to be expected and is not considered a flaw in this material. Mesh backed use appropriate setting materials. Thickness variation may be up to 1mm. Material has distinctive veining that may crack or break with handling. Order an additional 10% overage as compared to other materials. Thickness varies not suitable for waterjet cutting. Resin or mesh-backed stone field tile must be installed with epoxy mortar or a combination of suitable primer and cement-based mortar. Consult your setting materials manufacturer for specific recommendations. Minor vein washout is possible in wet installations.														

INVISIBLE BLUE

Honed Trapezoid Mosaic

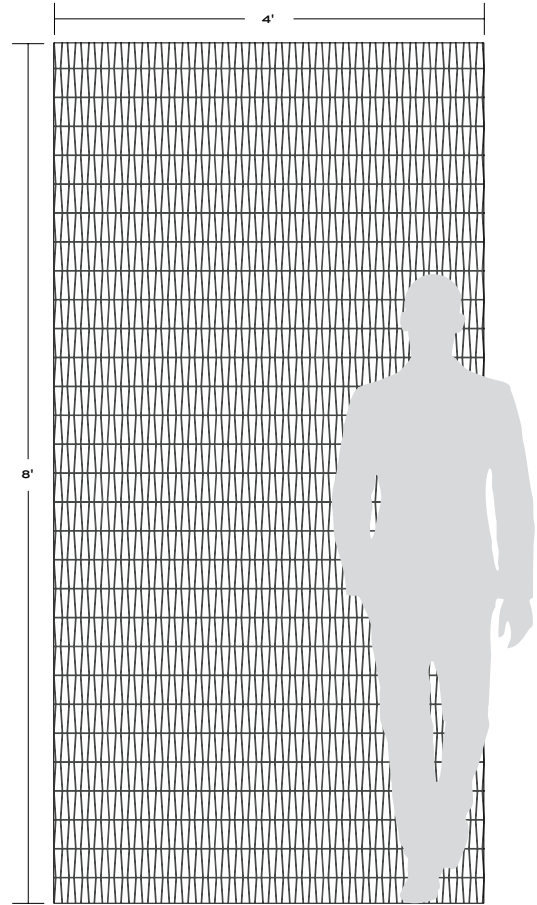

APPLICATIONS									VARIATION				TAILORED TO CUSTOMIZATION ⁸	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1	V2	V3	V4	CARPET CUTTING	
Light/Medium Commercial	All	Yes, including steam ¹	Yes, including steam ¹	No	Yes, non-freeze thaw	No	Yes	Yes					FIELD	
													FINISH	
													MOSAIC	
													SADDLE	
													VANITY TOP	
													WATERJET	
INSTALLATION/MAINTENANCE										AVAILABLE SIZES				
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT					
Ardex X4 White Tile & Stone Mortar ²	Ardex FG-C Microtec Unsanded ³	As established on sheets	Ardex 8+9	Mapei Keracaulk Unsanded	AquaMix Sealer's Choice Gold	AquaMix Concentrated	TCNA Handbook	No	Required					
NOTES														
¹ Showers: Product MUST be installed in accordance with current TCNA Handbook Stone Methods.														
² Alternate Mortar - Mapei Ultraflex 2 White, or Mapei Adesilex P10 White w/Keraply Additive														
³ Alternate grout - Mapei Ultracolor Plus FA or Mapei Keracolor Unsanded														
Tech Notes: Epoxy is to be expected and is not considered a flaw in this material. White mortar is recommended for natural stone.										HONED TRAPEZOID MOSAIC				
										11 11⁄16" x 12 13⁄16" x 3⁄8"				
										(1.04 SF/UNIT)				

LUXOR

The ancient Egyptian symbol of rebirth is the lotus flower, which we have beautifully rendered in Luxor. The pattern is drawn in tesserae mosaics across a smooth background of waterjet cut marble, melding old-world technique with modern technology in a pattern that's utterly timeless.



LUXOR




Bianco Dolomiti



Bianco Dolomiti polished background - Cloud polished lines



Grey

Thassos polished background - Azul Cielo & Bardiglio polished lines

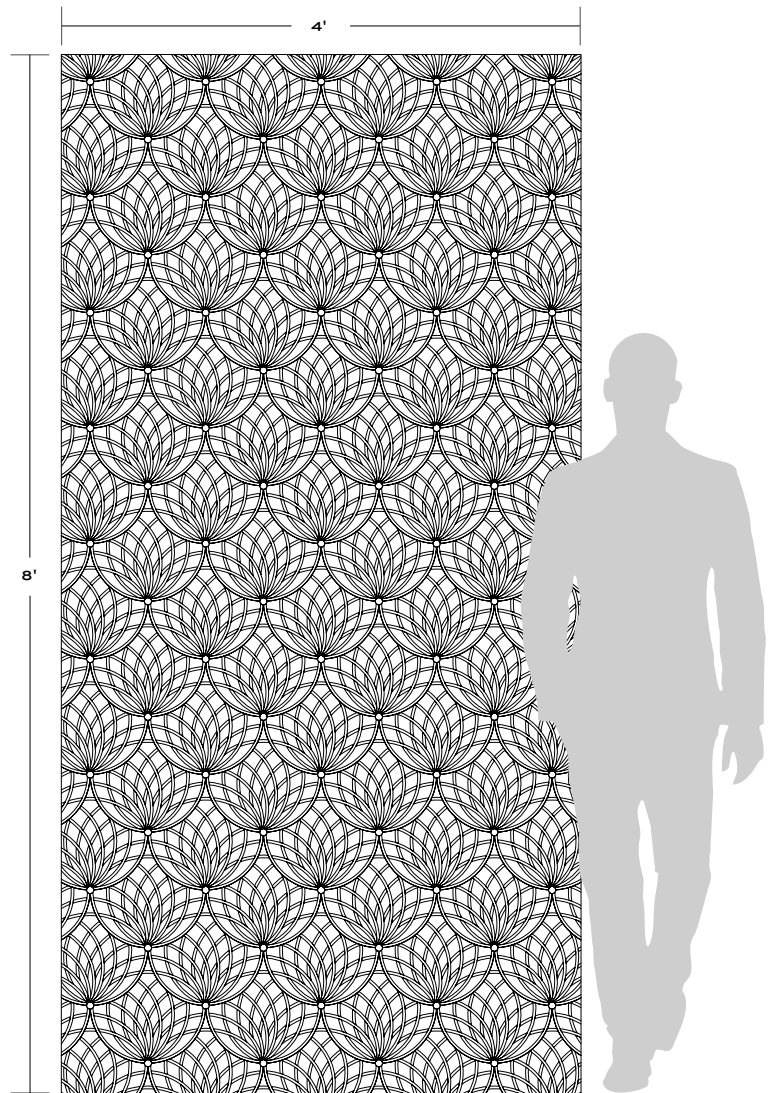

APPLICATIONS								VARIATION		TAILORED TO CUSTOMIZATION	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP		CARPET CUTTING		
Light/Medium Traffic Commercial	All	See Notes ¹	No	No	No	No	No		FIELD		
									FINISH		
									MOSAIC		
									SADDLE		
VANITY TOP											
WATERJET											
INSTALLATION/MAINTENANCE										MOSAIC	
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT		
Ardex N23 White ²	Ardex FL Rapid Set Sanded ³	As established on sheets	Mapei Mapelastick AquaDefense	Mapei Keracaulk Sanded	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook	Maintain sheet orientation	Required		
NOTES										(0.703 sf/unit) Mesh mounted interlocking sheet	
¹ Bianco Dolomiti: Yes, Including Steam - Grey: Conventional Only											
² Alternate Mortar - Mapei Granirapid System White											
³ Alternate Grout - Mapei Ultracolor Plus											

MORNINGSIDE HEIGHTS

Our Riverside Drive stone mosaic collection was an ode to 1920s Manhattan style. Morningside Heights is a different rendition, inspired by the character of its uptown neighbor. Like its namesake, Morningside Heights is more eclectic, but still steeped in tradition. Morningside Heights is available in two patterns, square and zigzag, each a classic geometric pattern in white and grey, with modern accents of blue, green, or pink.



MORNINGSIDE HEIGHTS



ZigZag Blue Polished



ZigZag Green Polished



ZigZag Pink Polished



Square Blue Polished



Square Green Polished





Square Pink Polished

APPLICATIONS								
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND
Light/Med Traffic Commercial	All	Yes, including steam	Yes ¹	No	Yes, non-freeze thaw	No	No	Yes

VARIATION			
V1	V2	V3	V4


INSTALLATION/MAINTENANCE									
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT
Ardex X4 Tile & Stone Mortar ²	Ardex FG-C Microtec Unsanded ³	As established on sheets	Mapei Mapelastick Aquadefense	Mapei Keracaulk Sanded	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook ⁴	50% Offset Required ⁵	Sample ⁶

NOTES
¹ Linear drain only ² Alternate mortar - Mapei Ultraflex 2 ³ Alternate grout - Mapei Ultracolor Plus ⁴ IMPORTANT: Proper installation will prevent darkening due to water accumulation behind the product. Follow TCNA guidelines to ensure proper installation. ⁵ Maintain sheet orientations ⁶ Layout for overview of material before installation - Maintain sheet orientation Tech note: Mosaic is hand-made, and varies in size and thickness. To install ensure sheets are clean, cut off any excess mesh that may prevent proper alignment. Remove any loose chips for insertion by hand before grouting. Comb mortar into substrate, flat trowel then lightly skim-coat mesh back to ensure adhesion. Embed mosaic into setting material using grout float, massage joints between each sheet. Any visible joints will be more visible after grouting. Place any loose chips by hand at this time. Tech Note: The installation of intricate mosaic patterns may require the use of a mosaic nipper to hand cut pieces along the edge to fit, or conduct repairs throughout the installation.


MOSAIC	
	
ZIGZAG 10 $\frac{1}{8}$" x 10 $\frac{3}{8}$" x $\frac{3}{8}$" <i>Mesh mounted interlocking sheet</i>	SQUARE 11" x 12 $\frac{5}{8}$" x $\frac{3}{8}$" <i>Mesh mounted interlocking sheet</i>

MORNINGSIDE HEIGHTS

ZIGZAG

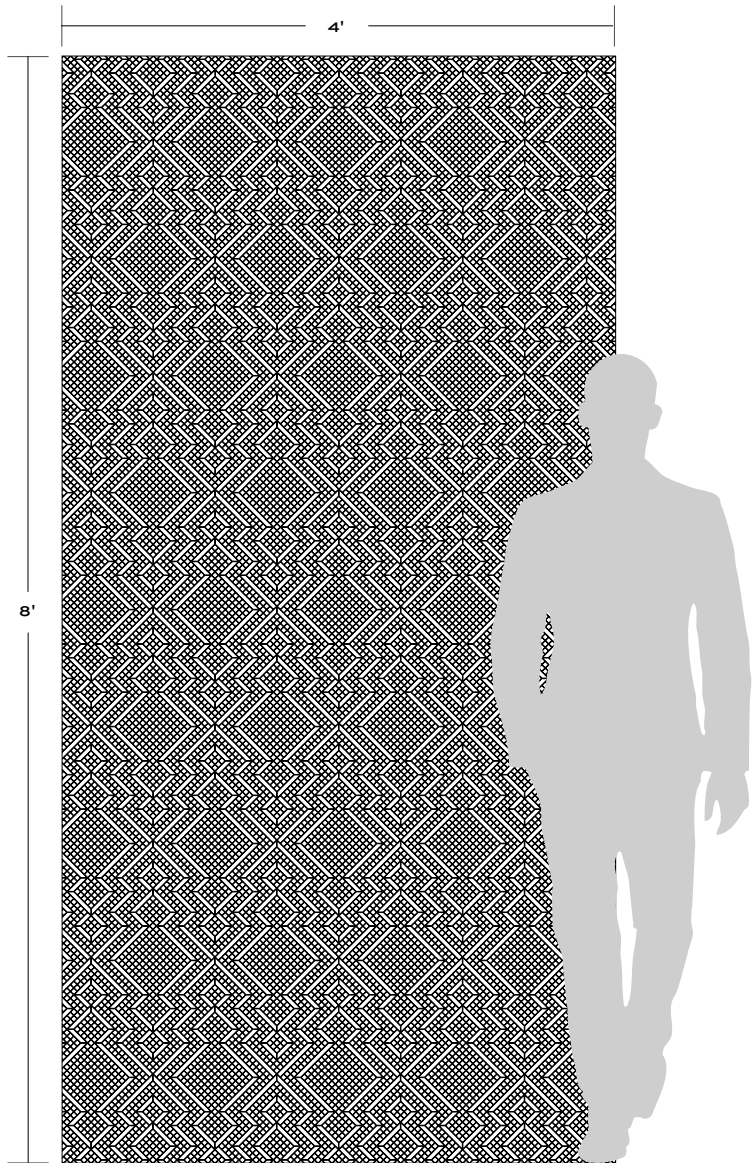


SQUARE

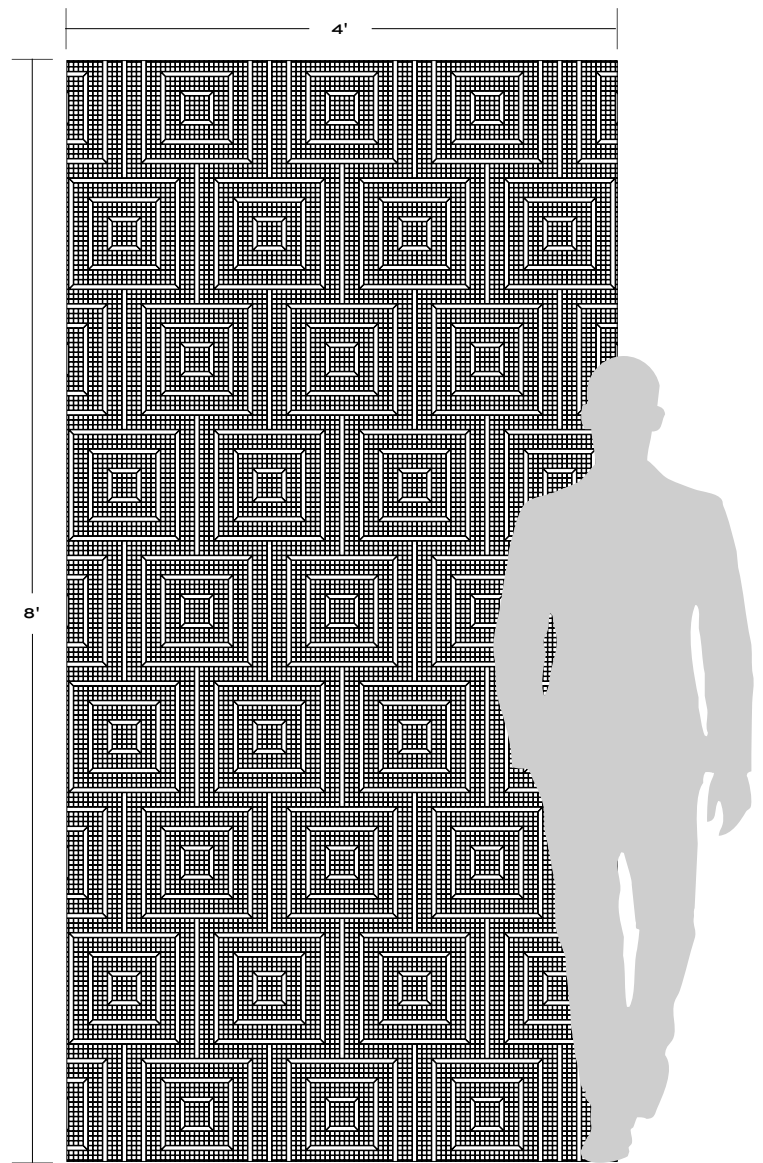

MORNINGSIDE HEIGHTS


ZIGZAG INSTALLATION GUIDE

STEP 1

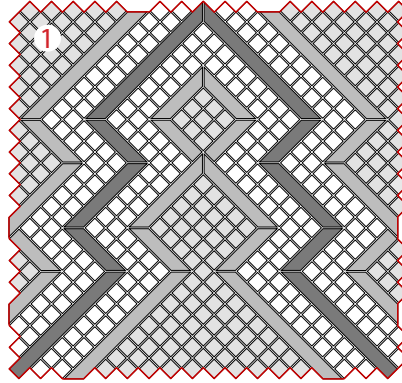


SINGLE UNIT

STEP 2

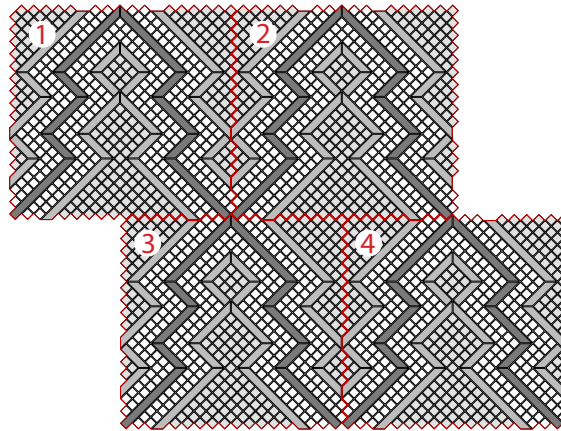

FOUR UNIT REPEAT


STEP 3

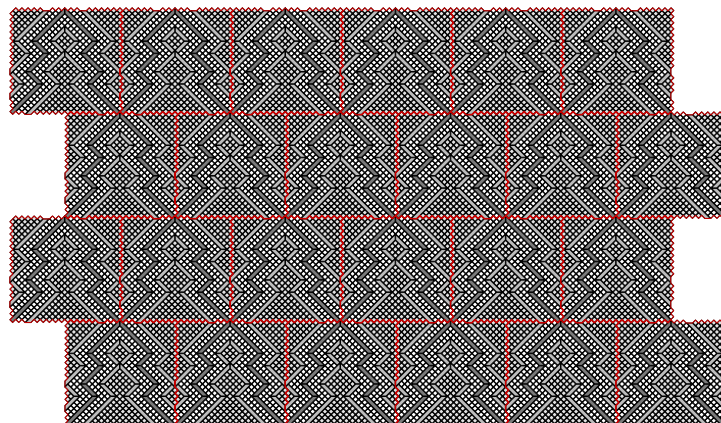

MULTIPLE UNIT REPEAT



MOTOR CITY CIRCLES

Motor City Circles drives tile design to a very cool place. This stunning mosaic spins a classic pattern on its axis, layering beautifully crafted stone or glass wheels in four refined colorways: Desert Sunrise, Bianco Dolomiti, Vanilla Onyx, and Ice White Jazz Glass.

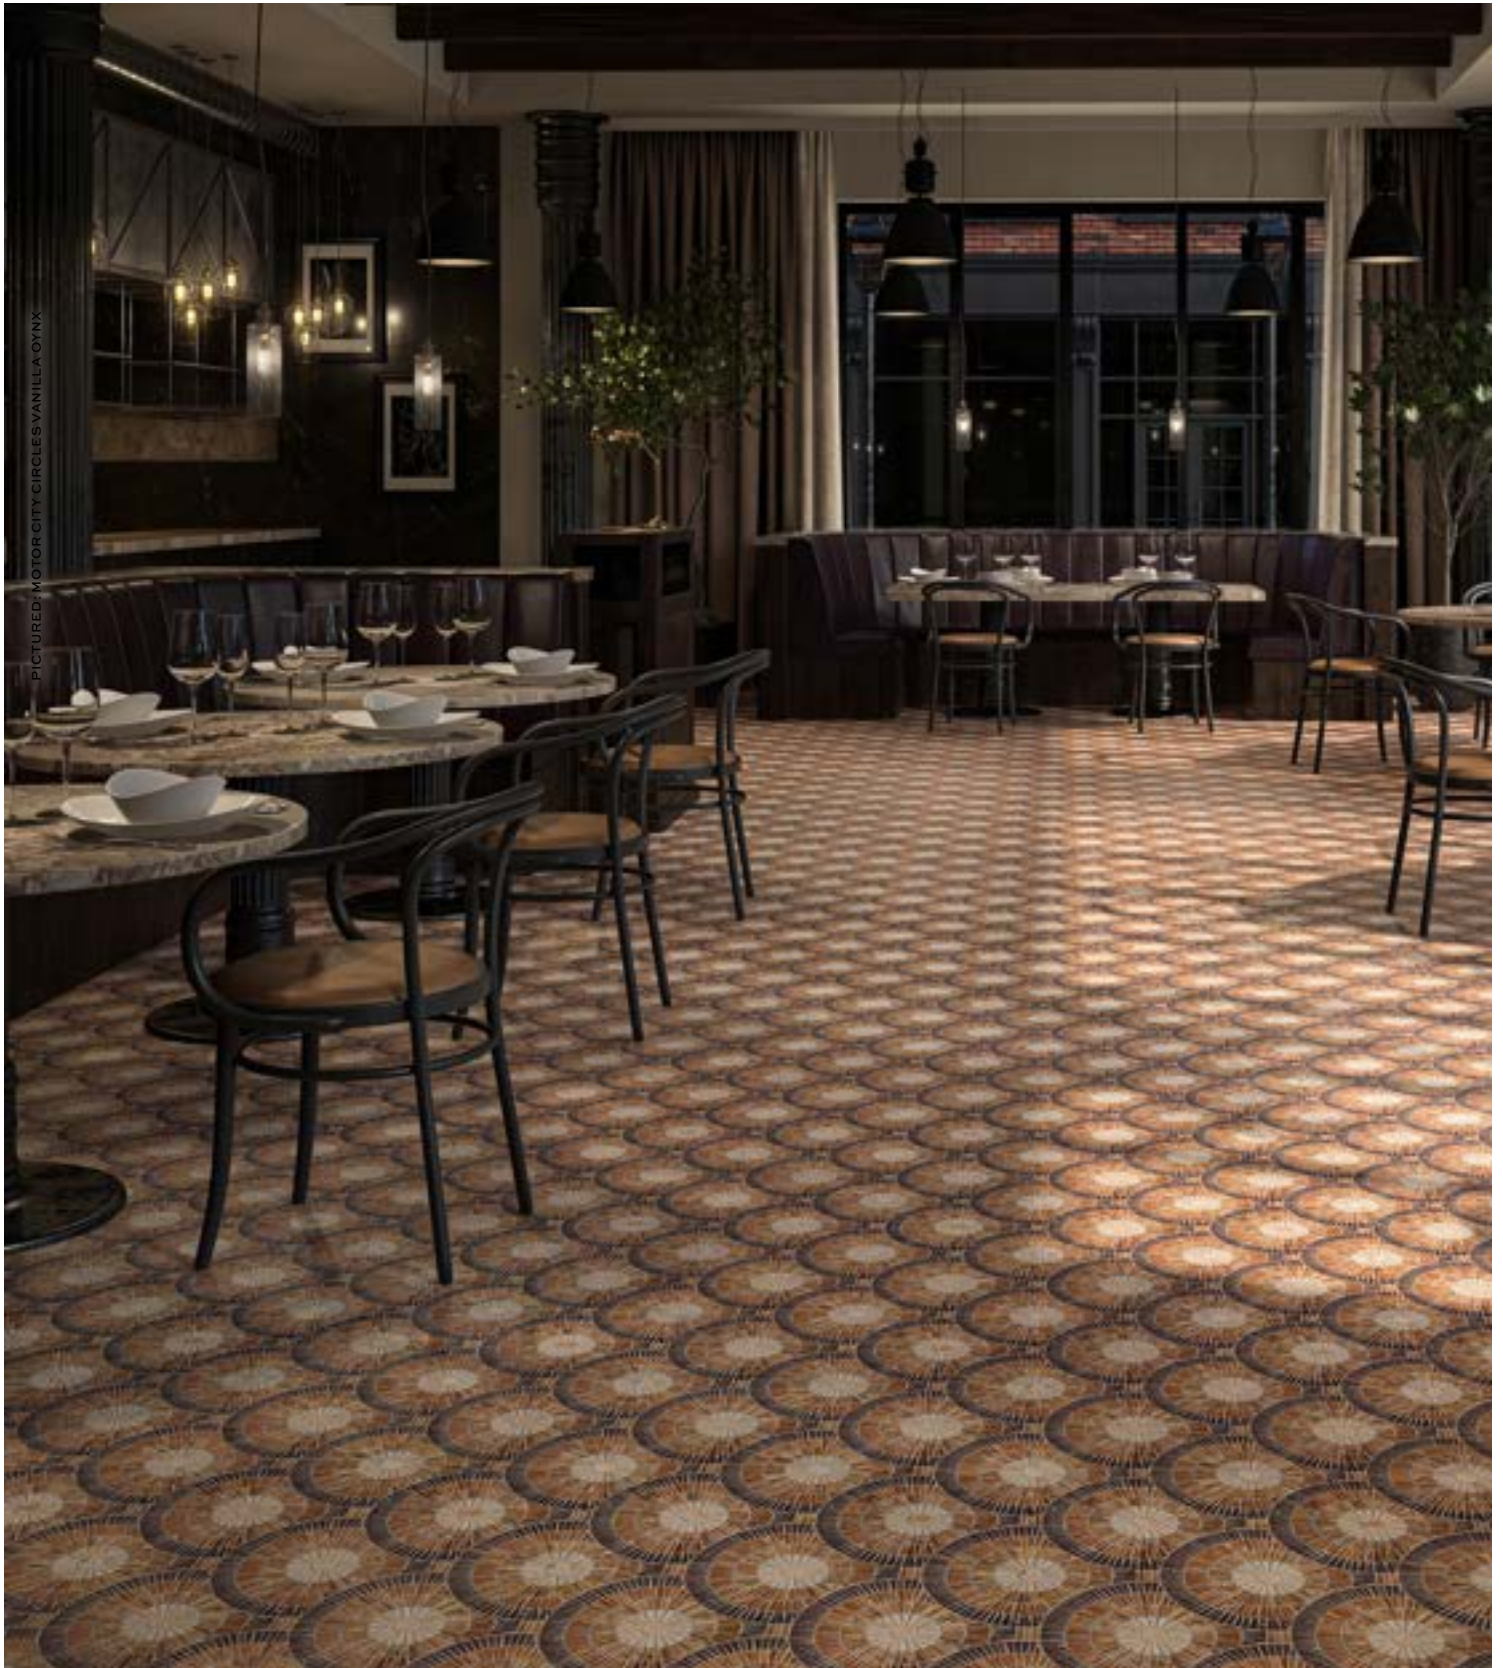

PICTURED: MOTOR CITY CIRCLES VANILLA ONYX

VANILLA ONYX


ARTISTICTILE.COM | MARCH 2025

MOTOR CITY CIRCLES


DESERT SUNRISE



Desert Sunrise

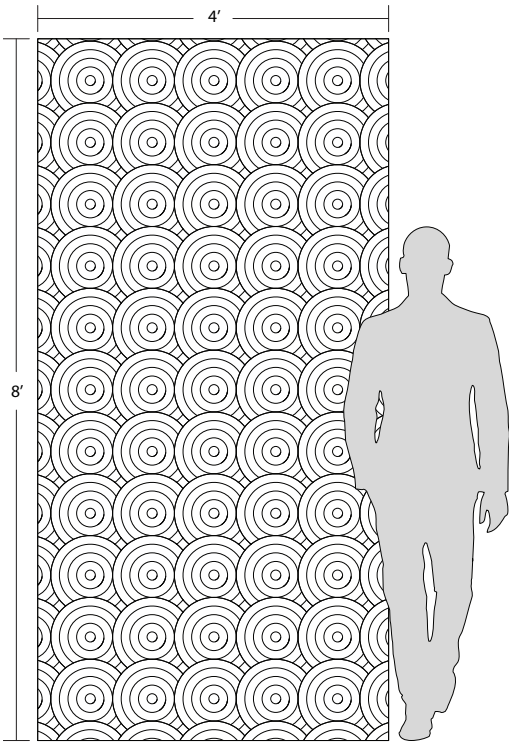

Straight Joint Layout

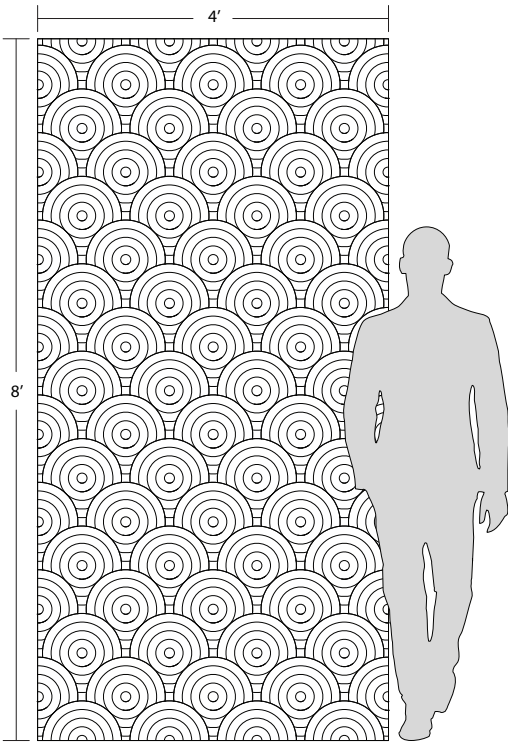

Broken Joint Layout

APPLICATIONS								
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND
Light / Medium Commercial	All	Conventional Only	Yes, conventional only ¹	No	Yes, non-freeze thaw	No	Yes	Yes

VARIATION			
V1	V2	V3	V4

INSTALLATION/MAINTENANCE									
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT
Ardex X77 White Microtec Fiber Reinforced Mortar ²	Ardex FG-C Microtec Unsanded ³	As established on sheets	Ardex 8+9	Ardex SX	AquaMix Sealer's Choice Gold	AquaMix Concentrated Cleaner	TCNA Handbook	No	Required

NOTES									
Product MUST be installed in accordance with current TCNA Handbook Stone Methods.									
¹ Shower Floors: Ardex 100% Solids Epoxy Adhesive White is recommended for installing this product in shower floor applications. See complete install instructions for further details. Minor vein washout is possible in wet installations.									
² Alternate Setting Materials: Ardex X4 White Tile & Stone Mortar, Ardex 100% Solids Epoxy Adhesive White									
³ Alternate Grout: Mapei Keracolor Unsanded, Ardex DG 1- One Component Grout									
Tech Note: Individual sheets of this mosaic are not square. Sheets are irregular and combine into a seamless interlocking pattern. Plan your layout accordingly. Dry laying of this product prior to installation is required. Massage joints when blending individual sheets. White mortar is recommended for natural stone. The installation of intricate mosaic patterns may require the use of a mosaic nipper to hand cut pieces along the edge to fit or conduct adjustments throughout the installation. For straight cuts on a tile wet saw clear plastic face tape can be applied to keep the mosaic pieces aligned while cutting. Seal and utilize a grout release prior to grouting.									

MOSAIC




8-7/16" x 8-7/16" x 3/8"

0.49 SF/unit

Interlocking Sheet

Tumbled Stone Mosaic

BIANCO DOLOMITI


ARTISTICTILE.COM | MARCH 2025

MOTOR CITY CIRCLES


ICE WHITE



Ice White

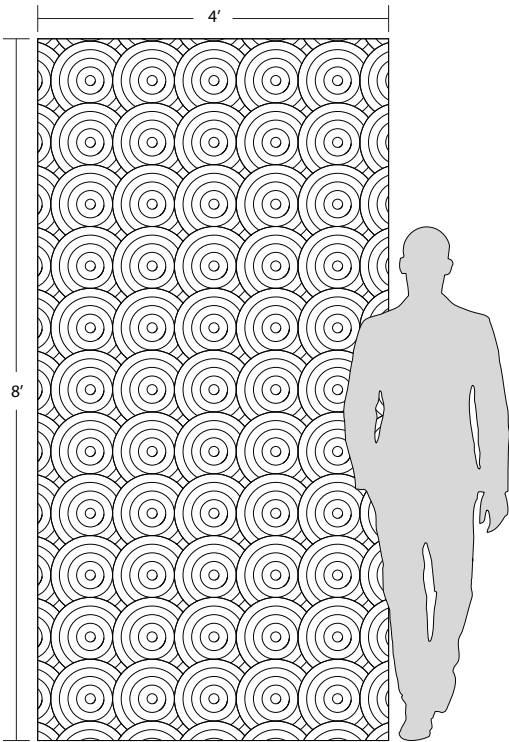

Straight Joint Layout

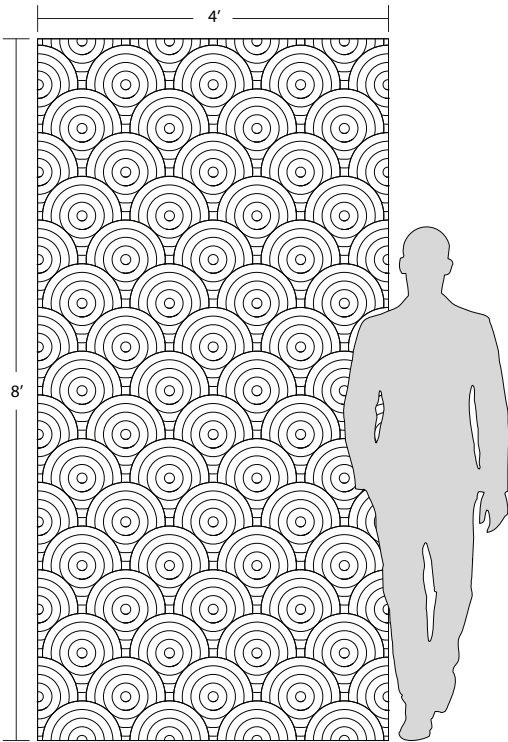

Broken Joint Layout

APPLICATIONS								
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND
Residential Light	All	Yes, including steam	Yes, including steam	No	Yes	No	No	Yes

VARIATION			
V1	V2	V3	V4

INSTALLATION/MAINTENANCE									
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT
Ardex X77 White Microtec Fiber Reinforced Mortar ¹	Ardex FG-C Microtec Unsanded ²	As established on sheets	Ardex 8+9	Ardex SX	Not required	AquaMix Concentrated Cleaner	TCNA Handbook	No	Required

NOTES
Product MUST be installed in accordance with current TCNA Handbook Stone Methods. ¹ Alternate Setting Materials: Ardex S48 White Rapid-Set Mortar / Mastic Hybrid, Ardex 100% Solids Epoxy Adhesive White ² Alternate Grout: Mapei Keracolor Unsanded, Ardex DG 1 - One Component Grout
Tech Note: Individual sheets of this mosaic are not square. Sheets are irregular and combine into a seamless interlocking pattern. Plan your layout accordingly. Suitable for low traffic residential floors. Refer to installation guidelines for appropriate setting materials. The appearance of uninstalled glass mosaic is different than the final installed product. The semi translucent Jazz Glass will be influenced by the choice of setting materials. A mockup to confirm mortar and grout selection is highly recommended. Grout color will greatly influence the appearance of the final installation. Grout color selection may be achieved by filling the joints with dry grout powder. Whether on installed mosaic or uninstalled mosaic sheet placed on white background.

MOSAIC
8-7/16" x 8-7/16" x 1/8" 0.49 SF/unit Interlocking Sheet Gloss Glass Mosaic

SETTING NATURAL STONE MOSAICS ON A SHOWER FLOOR WITH ARDEX 100% SOLIDS EPOXY ADHESIVE WHITE

ARDEX 100% Solids Epoxy Adhesive White is suitable for each of the following installation methods shown in the Shower Receptors section in the most current edition of TCNA Handbook for Ceramic, Glass, and Stone Tile Installation.

B414-24 Stone, B441-24 Stone, B415-24 Stone, B420-24 Stone,
B426-24 Stone, B431-24 Stone, B421-24 Stone, B422-24 Stone.

IMPORTANT NEXT STEPS:	IMPORTANT WATER CLEANUP STEPS
• Pour Part A (Resin) into Part B (Hardener) bucket and hand mix to achieve color blend. • Mix using a power mixer (approx. 650 RPM) for approx. 2 minutes. • Pour the entire mixture out of the bucket onto the floor or onto a scrape piece of tile. It is very important to get the entire mixture out of the bucket immediately. • Spread a thin layer of epoxy mortar with a flat trowel over a predetermined area of the shower floor. • Using a square notch trowel or a V-notch trowel, spread the epoxy mortar over the same predetermined shower floor area. • Next flatten out all trowel ridges with flat side of trowel striving to achieve 100% coverage over the predetermined shower floor area. • Place the interlocking mosaic sheets into mortar bed over the predetermined shower floor area for 100% coverage. • Tap down and level the mosaic sheets with a grout float over the predetermined area. • Allow mortar to set, harden, and cure.	• Wipe up any epoxy residue with sponges and clean water. • Note: No soap and no chemicals are needed. Just clean water. • Rinse sponges and change the water often. • Finally wipe with cool, clean water & clean sponges. • Use clean microfiber cloths for final wipe down.

Artistic Tile recommends sealing all natural stones before grouting.

OMBRÉ STONE

An evolution of our iconic Billie Ombré Glass Mosaic, Ombré Stone creates a similar, smooth ombre effect in natural stone. Ombré Grey's colors ascend from deep charcoal grey to pure white, while Ombré Lilac scales from a vibrant purple to a pure white. Ombré Desert Sunrise evokes the early glow of a desert dawn, ranging from a rich red blend to a warm cream. Inspired by a cool mountain morning, Ombré Mountain Mist transitions from warm cream into a serene blue-grey. Ombré Grey and Lilac are stocked in a polished finish; Ombré Desert Sunrise and Mountain Mist are stocked in a honed finish. Each colorway is complemented with solid color mosaics to extend the ombre effect in either direction, allowing for endless design possibilities.



PICTURED: DESERT SUNRISE OMBRE STONE MOSAIC

OMBRÉ STONE

OMBRÉ




Grey Polished Mosaic
China Black, Grey Black, Bardiglio Nuvolato,
Statuary, Bianco Dolomiti, Thassos



Lilac Polished Mosaic
Lilac, Bianco Dolomiti, Thassos


EXTENDERS



Black



White

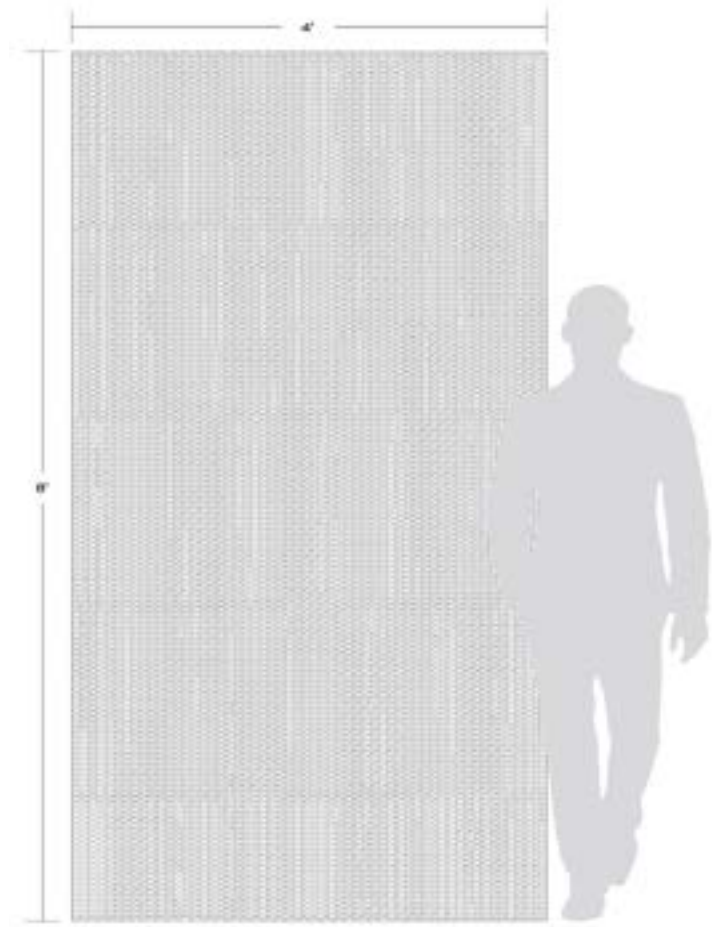

APPLICATIONS									VARIATION ⁶			
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1	V2	V3	V4
Light/Med Traffic Commercial	All	Yes, including steam	See Notes ¹	No	Yes, Non-Freeze Thaw	No	Yes	Yes				
INSTALLATION/MAINTENANCE										MOSAIC		
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT	 OMBRÉ STONE 20" x 6 7/16" x 3/8" (0.90 sf/pc) Interlocking Sheet		
Ardex N23 Microtec Rapid Set ²	Ardex FG-C Microtec Unsanded ³	As established on sheets	Ardex 8 + 9	Ardex SX	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook ⁴	Rotated	Required ⁵			
NOTES										EXTENDERS		
¹ Lilac Mosaic - Yes, Grey Mosaic - No ² Or Mapei Granirapid System required for Ombré Lilac Alternate mortar for Ombré Lilac, White or Black Ardex X4 or Mapei Ultraflex 2 ³ Alternate grout - Mapei Flexcolor CQ or Mapei Ultracolor Plus FA ⁴ IMPORTANT: Proper installation will prevent darkening due to water accumulation behind the product. Follow TCNA guidelines to ensure proper installation. ⁵ Layout for overview of material before installation. ⁶ V2 for Extenders										 EXTENDERS 6 3/16" x 10 1/2" x 3/8" (0.45 sf/pc) Interlocking Sheet		

OMBRÉ STONE

OMBRÉ



Desert Sunrise Honed Mosaic
Red Travertine, Rosa Coral and Alicante



Mountain Mist Honed Mosaic
Gris Tepeca and Crema Marfil

EXTENDERS




Desert Sunrise Red



Mountain Mist Grey



Desert Sunrise Cream

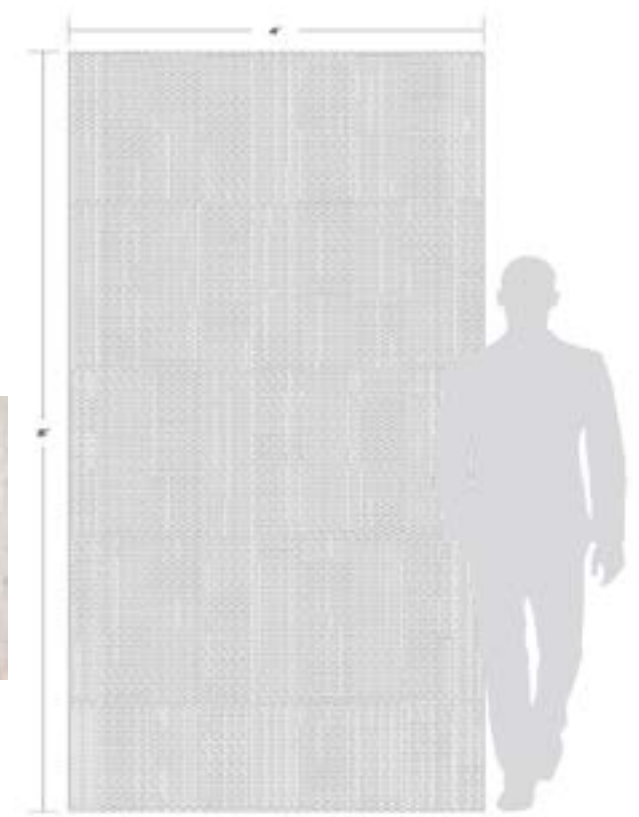


APPLICATIONS									VARIATION ²	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1 V2 V3 V4	
Light/Medium Commercial	All	Yes, conventional only ¹	Yes, conventional only ¹	No	No	No	Yes	Yes		
INSTALLATION/MAINTENANCE										MOSAIC
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT	
Ardex N23 Microtec Rapid Set ³	Ardex FG-C Microtec Unsanded ⁴	As established on sheets	Ardex 8 + 9	Ardex SX	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook ⁵	Refer To Layout Options	Full Dry ⁶	OMBRÉ STONE 6 3/16" x 21 1/16" x 3/8" (0.91 sf/pc) Interlocking Sheet EXTENDERS 6 3/16" x 10 1/2" x 3/8" (0.45 sf/pc) Interlocking Sheet
NOTES										
¹ Product MUST be installed in accordance with current TCNA Handbook Stone Methods. Ardex 100% Solids Epoxy Adhesive White is recommended for installing this product in shower floor applications. ² V3 for Extenders ³ Alternate Setting Material: Mapei Granirapid White 2-part System or Ardex 100% Solids Epoxy Adhesive White ⁴ Alternate grout - Mapei Keracolor Unsanded or Ardex DG 1 – One Component Grout ⁵ Individual sheets of this mosaic are not square. Sheets are irregular and combine into a seamless interlocking pattern. Plan your layout accordingly. ⁶ Dry laying of this product prior to installation is required. Massage joints when blending individual sheets Tech Notes: The installation of intricate mosaic patterns may require the use of a mosaic nipper to hand cut pieces along the edge to fit or conduct adjustments throughout the installation. For straight cuts on a tile wet saw clear plastic face tape can be applied to keep the mosaic pieces aligned while cutting. Seal and utilize a grout release prior to grouting. Cannot be used interchangeably with Lilac/Grey Ombre Stone or Black/White Extenders.										

OMBRÉ STONE

INSTALLATION INSTRUCTIONS

TO CREATE AN OMBRÉ, ROTATE EACH PIECE 180°.

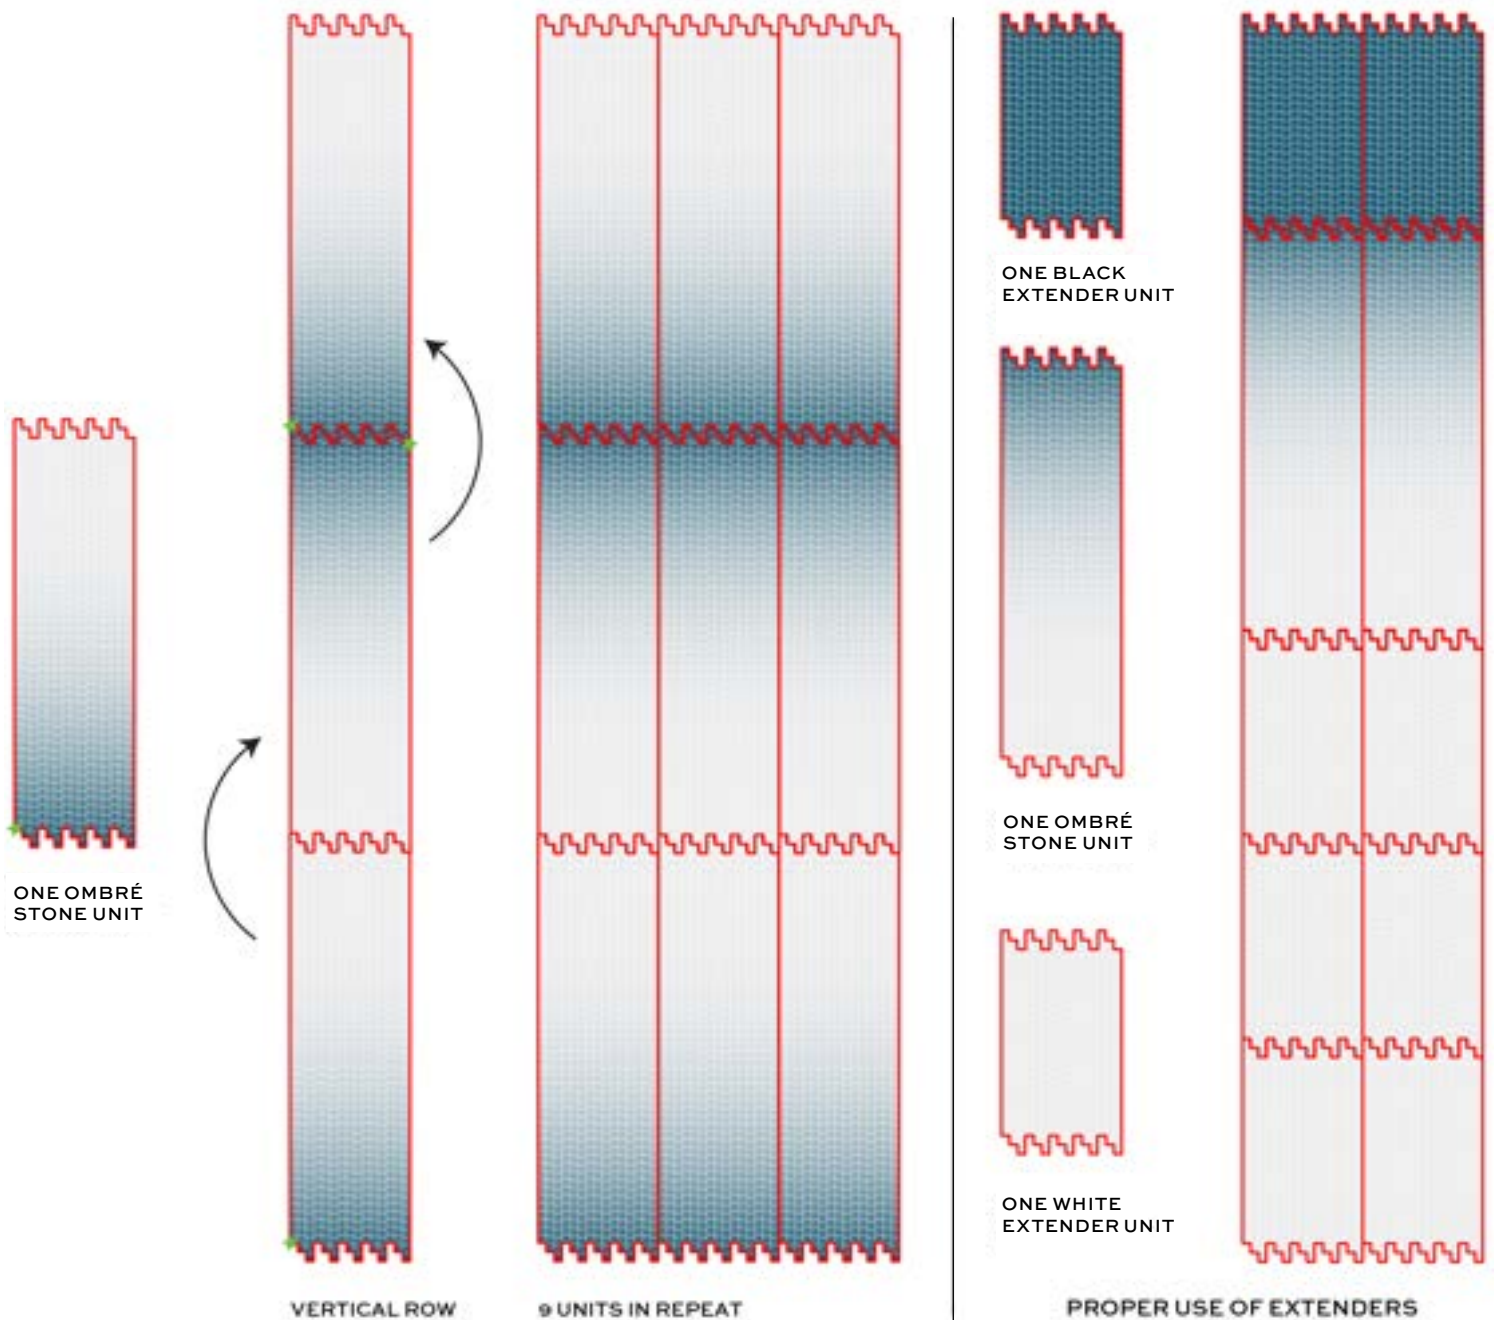

SETTING NATURAL STONE MOSAICS ON A SHOWER FLOOR WITH ARDEX 100% SOLIDS EPOXY ADHESIVE WHITE

ARDEX 100% Solids Epoxy Adhesive White is suitable for each of the following installation methods shown in the Shower Receptors section in the most current edition of TCNA Handbook for Ceramic, Glass, and Stone Tile Installation.

B414-24 Stone, B441-24 Stone, B415-24 Stone, B420-24 Stone,
B426-24 Stone, B431-24 Stone, B421-24 Stone, B422-24 Stone.

IMPORTANT NEXT STEPS:	IMPORTANT WATER CLEANUP STEPS
• Pour Part A (Resin) into Part B (Hardener) bucket and hand mix to achieve color blend. • Mix using a power mixer (approx. 650 RPM) for approx. 2 minutes. • Pour the entire mixture out of the bucket onto the floor or onto a scrape piece of tile. It is very important to get the entire mixture out of the bucket immediately. • Spread a thin layer of epoxy mortar with a flat trowel over a predetermined area of the shower floor. • Using a square notch trowel or a V-notch trowel, spread the epoxy mortar over the same predetermined shower floor area. • Next flatten out all trowel ridges with flat side of trowel striving to achieve 100% coverage over the predetermined shower floor area. • Place the interlocking mosaic sheets into mortar bed over the predetermined shower floor area for 100% coverage. • Tap down and level the mosaic sheets with a grout float over the predetermined area. • Allow mortar to set, harden, and cure.	• Wipe up any epoxy residue with sponges and clean water. • Note: No soap and no chemicals are needed. Just clean water. • Rinse sponges and change the water often. • Finally wipe with cool, clean water & clean sponges. • Use clean microfiber cloths for final wipe down.

Artistic Tile recommends sealing all natural stones before grouting.

PENNY LANE

Penny Lane is our take on penny-round mosaics, elevated in Artistic fashion through the use of luxe natural stone and presented in a true penny size, in an offset pattern. Penny Lane is stocked in seven colorways: White, Nero, Vanilla Onyx, Azul Cielo, Pink, Green, and White Sand. Penny Lane is uniquely suited for graphic installations of two or more colorways, in color blocks or in stripes. Vanilla Onyx is polished; all other colorways are honed.



SHOWN: PENNY LANE WHITE SAND HONED
WITH BIANCO CARRARA MARBLE

PENNY LANE




Pink Marble - Honed




Vanilla Onyx - Polished




Azul Cielo - Honed



Nero - Honed




White - Honed
Arabescato, Bianco Dolomiti, and Statuary



Green - Honed
Ice Green, Silverwave, Jade Green, and Bianco Carrara



White Sand - Honed

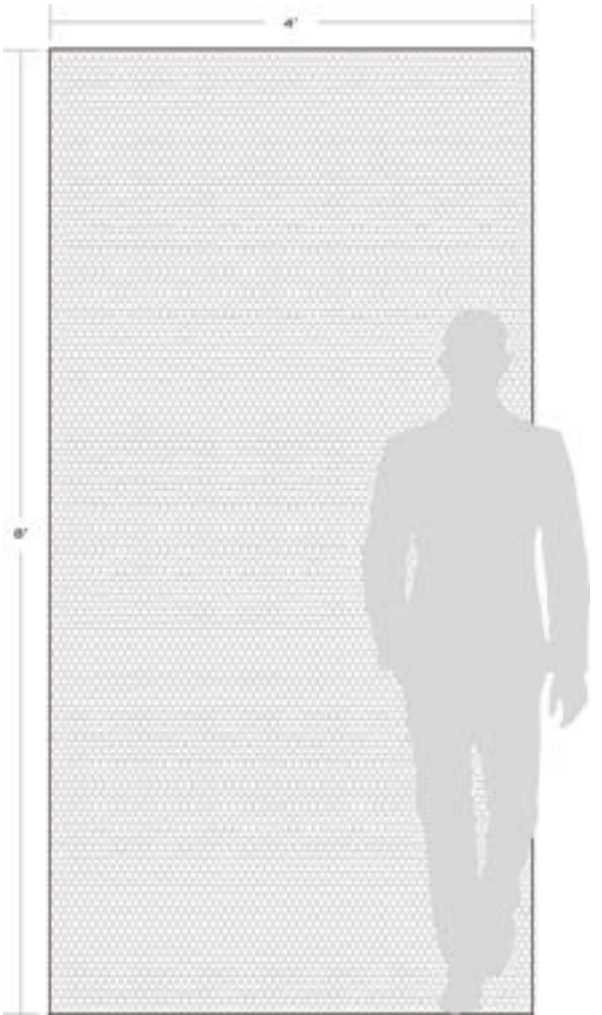

APPLICATIONS								
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND
Commercial Light/Medium ¹	All	Yes, including steam ²	Yes, including steam ³	No	No ⁴	No	Yes	Yes

VARIATION ⁵			
V1	V2	V3	V4

INSTALLATION/MAINTENANCE									
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT
Ardex X77 White Microtec Fiber Reinforced Mortar ⁶	Ardex FG-C Microtec Unsanded ⁷	As Established on Sheets	Ardex 8 + 9	Ardex SX	Aquamix Sealer's Choice Gold	Aquamix Concentrated Cleaner	TCNA Handbook	Maintain Sheet orientation	Recommended ⁸

AVAILABLE SIZES
11 1/8" x 11 15/16" x 3/8" (0.92 sf/unit) <i>Honed & Polished</i>

NOTES	
¹ Vanilla Onyx - Residential Light ² Vanilla Onyx - Conventional only ³ Vanilla Onyx - Yes, conventional only ⁴ White Sand - Yes, non-freeze thaw ⁵ Azul Cielo - V2, White Sand - V4 ⁶ Alternate Mortar - Ardex X4 White Tile & Stone Mortar and Ardex 100% Solids Epoxy Adhesive White ⁷ Alternate Grout - Ardex DG 1 - One Component Grout and Ardex WA Epoxy ⁸ White Sand - Required	Technotes: Proper installation will prevent darkening due to water accumulation behind the product. Follow TCNA guidelines to ensure proper installation. For shower floor installations use Ardex 100% Solids Epoxy Adhesive White. See complete install instructions for further details. Individual sheets of this mosaic are not square. Sheets are irregular and combine into a seamless interlocking pattern. Plan your layout accordingly. Massage joints when blending individual sheets. White mortar is recommended for natural stone. The installation of intricate mosaic patterns may require the use of a mosaic nipper to hand cut pieces along the edge to fit or conduct adjustments throughout the installation. For straight cuts on a tile wet saw clear plastic face tape can be applied to keep the mosaic pieces aligned while cutting. Seal and utilize a grout release prior to grouting. White Sand may exhibit random spotting of mineral deposits.


RIVERSIDE DRIVE COLLECTION

Riverside Drive stone mosaics resurrect the elegance of old New York in a modern collection of finely cut stone hexagons. The collection updates a 1920's aesthetic, taking a historical style from its porcelain roots into a higher class. Stocked in four patterns or made to order with our Tailored To program.




PICTURED: RIVERSIDE DRIVE SWIRL CREAM


RIVERSIDE DRIVE COLLECTION




Hexagon Grey - Polished Bianco Carrara, Thassos & Bardiglio



Diamond Grey - Polished Bianco Carrara, Thassos & Bardiglio




Dot Grey - Polished Bianco Carrara & Thassos



Hexagon White - Polished Thassos, Pacific White & Nero




Diamond White - Polished Thassos, Pacific White & Nero



Dot White - Polished Thassos & Nero



Hexagon Cream - Polished Crema Marfil, Nero & Statuary
Limited Inventory



Swirl Cream - Polished Crema Marfil, Pacific White & Thassos




PICTURED: RIVERSIDE DRIVE HEXAGON GREY & DIAMOND GREY

APPLICATIONS									VARIATION				TAILORED TO CUSTOMIZATION	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1	V2	V3	V4	CARPET CUTTING	
Medium Traffic Commercial	All	Yes, including steam ¹	Yes ²	No	Yes, non-freeze thaw ³	No	Yes	Yes					FIELD	FINISH
													MOSAIC	SADDLE
													VANITY TOP	WATERJET


INSTALLATION/MAINTENANCE										AVAILABLE SIZES	
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT		
Mapei Ultraflex 2 White ⁴	Mapei Ultracolor Plus Sanded ⁵	As established on sheets	Mapei Mapelastick AquaDefense	Mapei Keracaulk Sanded	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook ⁶	No	Required	SWIRL 2CM MOSAIC (1.47 sf) Mesh mounted interlocking sheets Polished	HEXAGON 2CM MOSAIC (0.82 sf) Mesh mounted interlocking sheets Polished

NOTES											
¹ Diamond Grey & Hexagon Grey - Conventional showers only ² Diamond Grey & Hexagon Grey - No ³ Diamond Grey & Hexagon Grey - No ⁴ Diamond Grey & Hexagon Grey - Mapei Granirapid System ⁵ High performance grout option for all - Litokol Starlike Classic & Mapei Flexcolor CQ For all colorways, pattern is directional. Maintain sheet orientation during installation. ⁶ IMPORTANT: Proper installation will prevent darkening due to water accumulation behind the product. Follow TCNA guidelines to ensure proper installation.										DOT 2CM MOSAIC (0.86 sf) Mesh mounted interlocking sheets Polished	DIAMOND 2 CM MOSAIC (0.86 sf) Mesh mounted interlocking sheets Polished


RIVERSIDE DRIVE COLLECTION

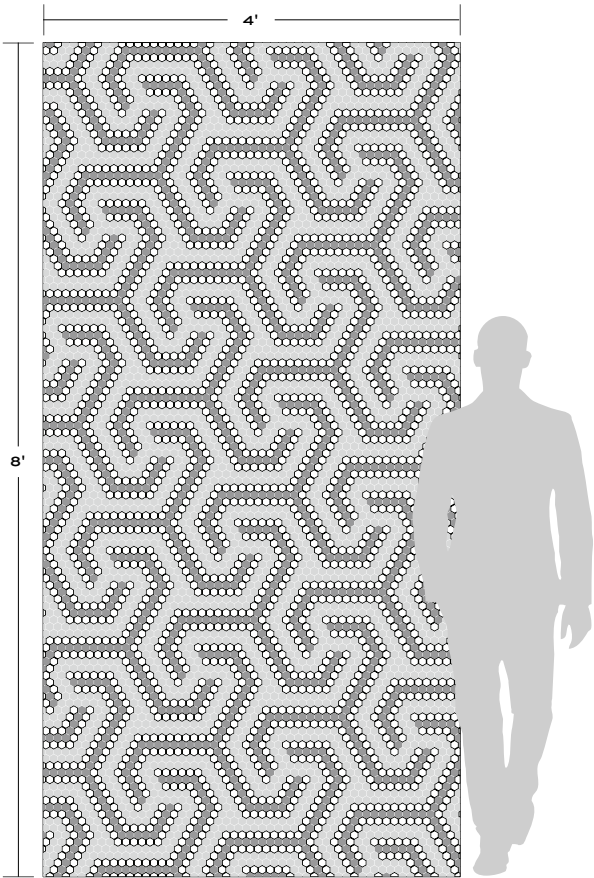


SWIRL 2CM MOSAIC

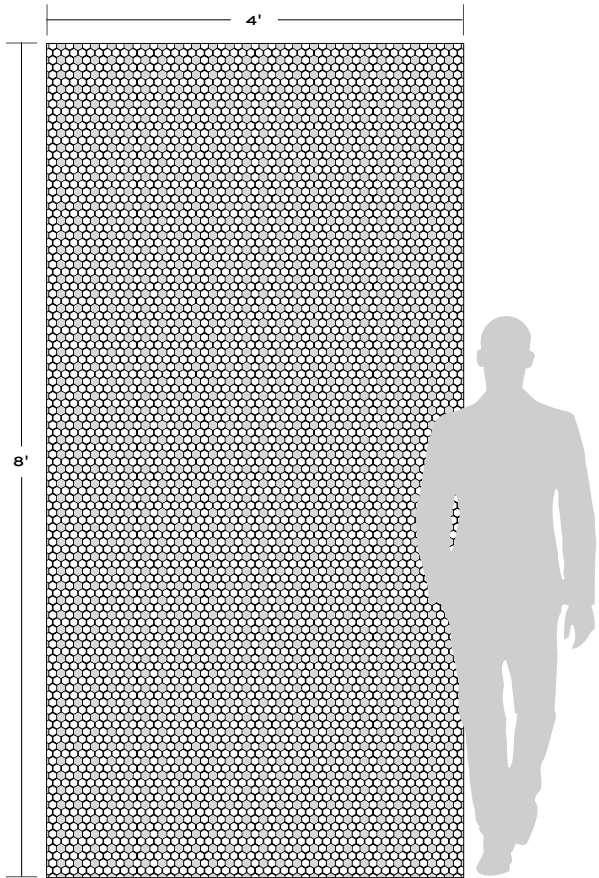

DOT 2CM MOSAIC

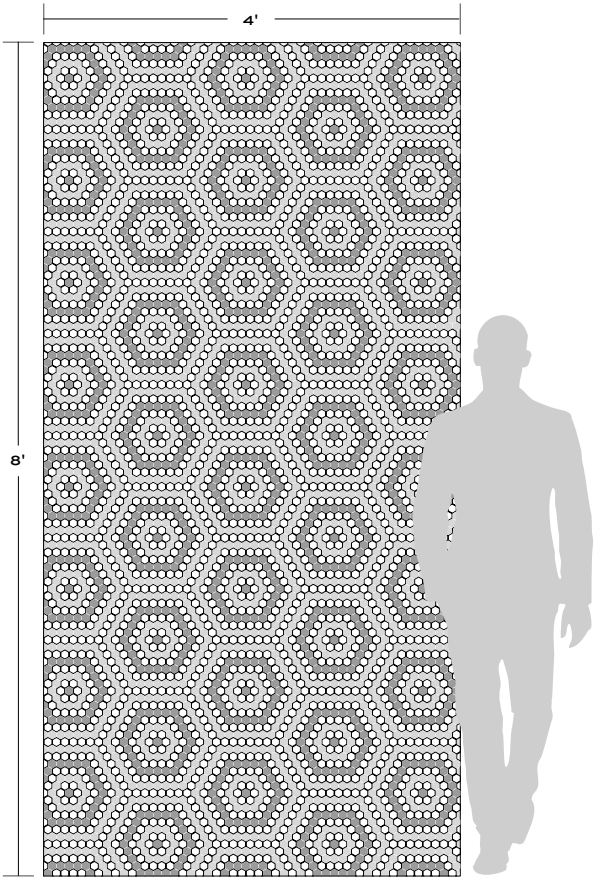

HEXAGON 2CM MOSAIC

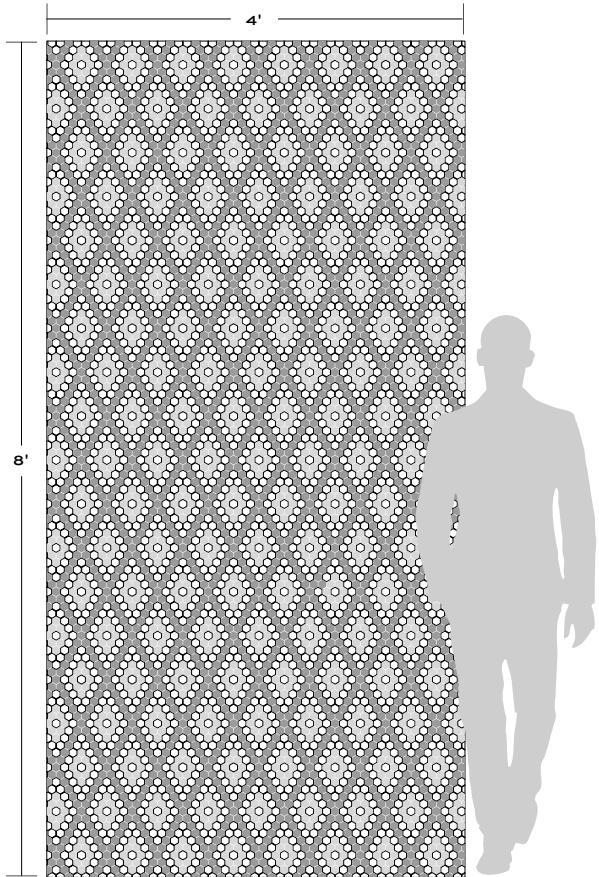

DIAMOND 2CM MOSAIC

RIVERSIDE DRIVE COLLECTION



ROLLIN' STONE CIRCLES


Inspired by its sister pattern crafted from Jazz glass, this intricate, high-energy tesserae mosaic applies this refined aesthetic to stone. Stocked in a classic white blend of polished Thassos and Bianco Carrara marble, Rollin' Stone Circles is suitable for walls, floors and wet applications.



ROLLIN' STONE CIRCLES



White Polished - Thassos & Bianco Carrara

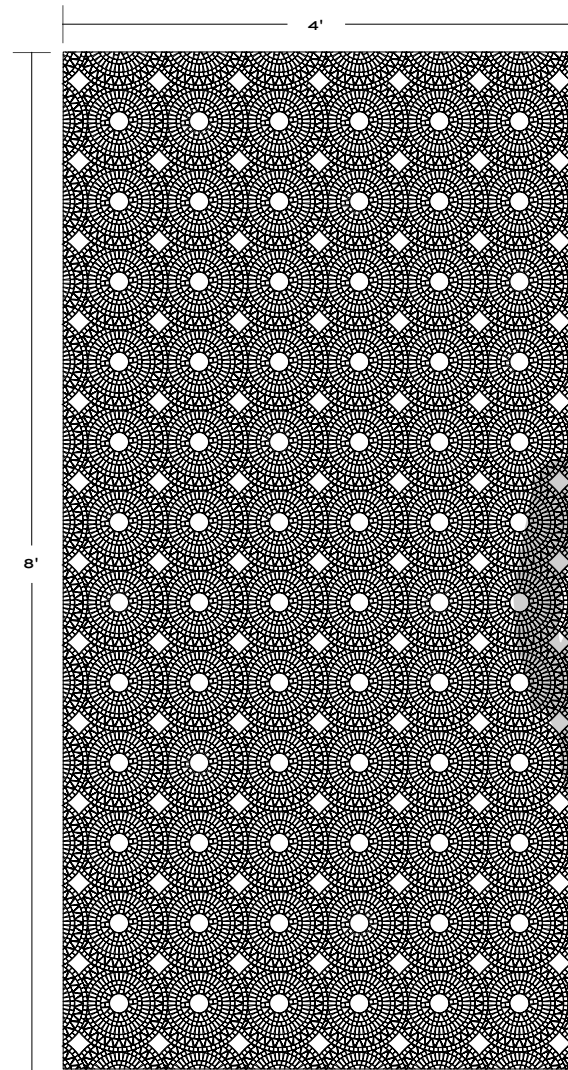

APPLICATIONS								
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND
Medium Traffic Commercial	All	Yes, including steam	Yes	No	Yes, Non-Freeze Thaw	No	Yes	Yes

VARIATION			
V1	V2	V3	V4

INSTALLATION/MAINTENANCE									
SETTING MATERIAL*	GROUT*	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT
Mapei Ultraflex 2	Mapei Ultracolor Plus	As established on sheets	Mapei Mapelastic AquaDefense	Mapei Keracaulk Sanded	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook ¹	See Drawing	Recommended

NOTES									
¹ IMPORTANT: Proper installation will prevent darkening due to water accumulation behind the product. Follow TCNA guidelines to ensure proper installation. *Setting Material: Alternate Mortar - Mapei Kerabond/Keralastic & Ardex X4 *Grout: Alternate Grout - Mapei Flexcolor CQ & Ardex FG Microtec Unsanded									

MOSAIC
7 9/16" x 7 9/16" x 3/8" Polished

SAKURA

This exquisite flower of the cherry tree, Sakura is beloved in Japan and cherished in North America, where a cherry tree in full bloom is the most visually splendid moment of Spring. Sakura captures this magic in mosaic form, with drifting blossoms inset into a swirl of stone. The pattern is also available as Sakura Falls, the same swirling background, free of floral ornament. Sakura is stocked in three colorways - Bianco Dolomiti with blossoms of Vanilla Onyx, Calacatta Bluette, Azul Cielo, and Calacatta Gold; Calacatta Bluette with blossoms of Bianco Dolomiti, Artemisia Grey and Azul Cielo; and Bianco Antico with blossoms of Rosa Perlino, Vanilla Onyx, Turkish Red Travertine, and Rosa Portogallo. Sakura Falls is stocked in honed Bianco Dolomiti, Calacatta Gold, Calacatta Bluette, and Bianco Antico.




PICTURED: SAKURA & SAKURA FALLS CALACATTA BLUETTE


SAKURA




Bianco Dolomiti - Honed

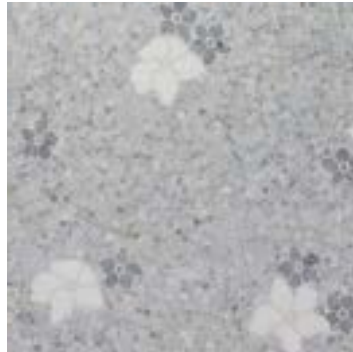

Calacatta Bluette - Honed

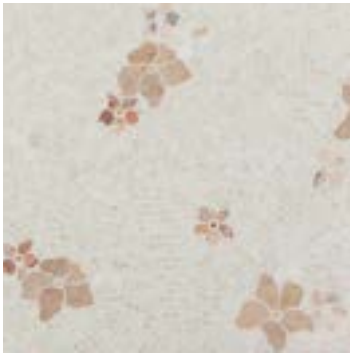


Bianco Antico - Honed

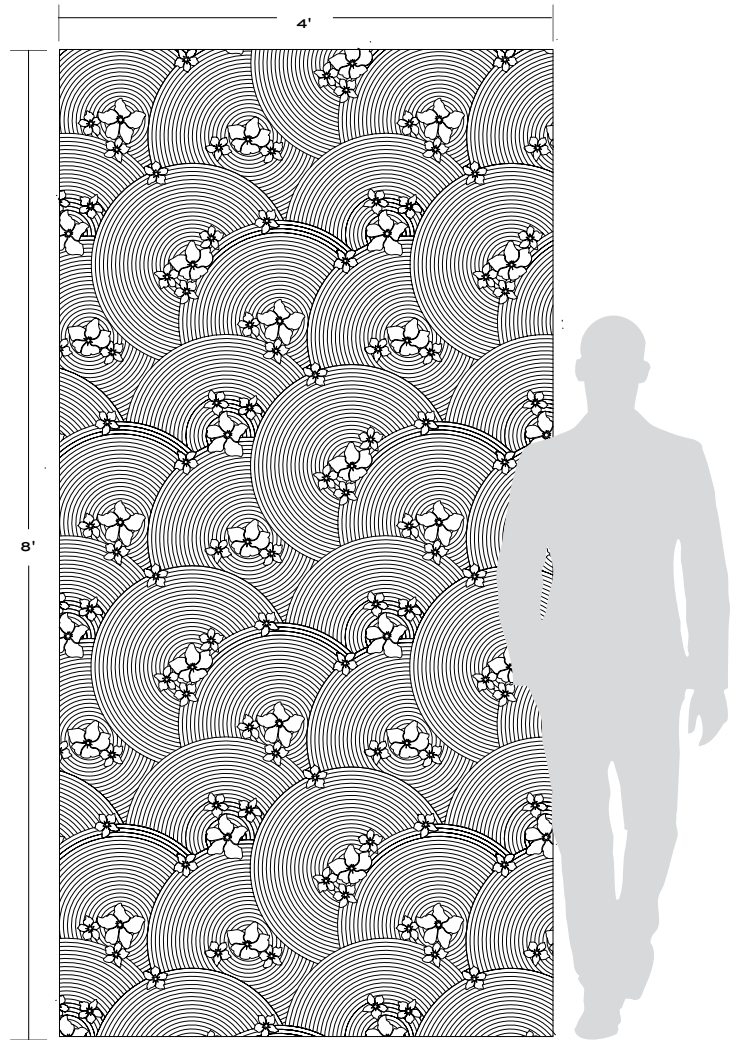

APPLICATIONS									VARIATION		TAILORED TO CUSTOMIZATION	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1	V2	CARPET CUTTING	FIELD
Commercial Light/Medium	All	Yes, including steam	No	No	No	No	Yes	Yes			FINISH	MOSAIC
											SADDLE	VANITY TOP
											WATERJET	

INSTALLATION/MAINTENANCE										WATERJET MOSAIC	
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT		
Ardex N23 Microtec Rapid Set ¹	Ardex FG-C Microtec Unsanded ²	As established on sheets	Ardex 8+9	Ardex SX	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook	Maintain sheet orientation	Required		

NOTES											
¹ Calacatta Bluette requires rapid-cure mortar, Ardex N23 or Mapei Granirapid White 2-part System ² Alternate Grout - Mapei Ultracolor Plus FA or Mapei Keracolor Unsanded Tech Note: Sakura and Sakura Falls will not interlock with each other. Product MUST be installed in accordance with current TCNA Handbook Stone Methods. Individual sheets of this mosaic are not square. Sheets are irregular and combine into a seamless interlocking pattern. Plan your layout accordingly. Pattern sheets will not interlock with each other. Dry laying of this product prior to installation is required. Install with Ardex N23 White, Mapei Granirapid White System, or Ardex 100% Solids Epoxy Adhesive White. The installation of intricate mosaic patterns may require the use of a mosaic nipper to hand cut pieces along the edge to fit or conduct adjustments throughout the installation. For straight cuts on a tile wet saw clear plastic face tape can be applied to keep the mosaic pieces aligned while cutting. White mortar is recommended for natural stone. Seal and utilize a grout release prior to grouting.											




19 5/8" x 31" x 3/8"
(4.2248 sf/unit)
interlocking sheets

Sold in a 3 piece set

SAKURA FALLS



Bianco Dolomiti - Honed

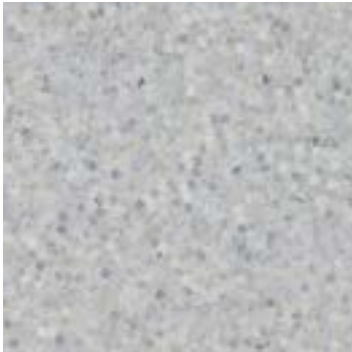


Calacatta Bluette - Honed



Calacatta Gold - Honed



Bianco Antico - Honed

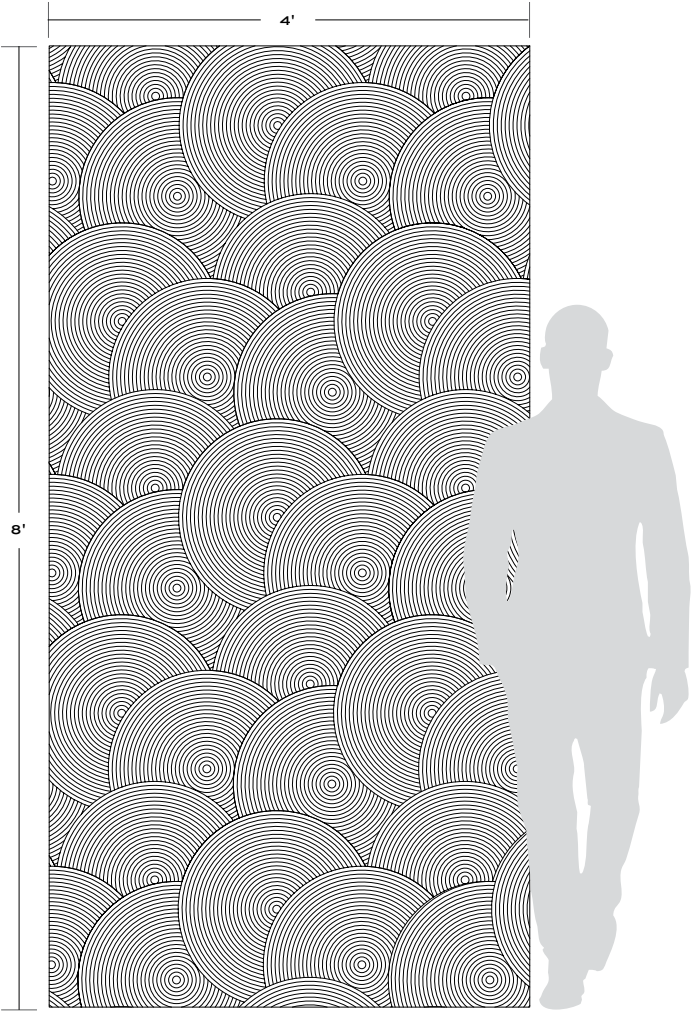

APPLICATIONS									VARIATION		TAILORED TO CUSTOMIZATION	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1 V2 V3 V4		CARPET CUTTING	FIELD
Commercial Light/ Medium	All	Yes, including steam ¹	Yes, including steam ¹	No	Yes, non-freeze thaw	No	Yes	Yes	FINISH		MOSAIC	SADDLE
									VANITY TOP		WATERJET	

INSTALLATION/MAINTENANCE										WATERJET MOSAIC	
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT	19 3/8" x 31" x 3/8" (4.20 sf/unit) interlocking sheets	
Ardex X77 White Microtec Fiber Reinforced Mortar ²	Ardex FG-C Microtec Unsanded ³	As established on sheets	Ardex 8+9	Ardex SX	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook	Maintain sheet orientation	Required	Sold in a 3 piece unit	

NOTES

¹ Showers: Product MUST be installed in accordance with current TCNA Handbook Stone Methods.
Ardex 100% Solids Epoxy Adhesive White is recommended for the installation of this product in shower floor applications.

² Calacatta Bluette - not suitable for shower floor

³ Calacatta Bluette & Bianco Antico require Ardex N23 White Microtec Rapid Set or Mapei Granirapid White 2-part System

⁴ Alternate Grout - Mapei Ultracolor Plus FA or Mapei Flexcolor CQ

Tech Note: Sakura and Sakura Falls will not interlock with each other. See complete install instructions for further details. Please be aware that veins in Bianco Antico may open if used in showers and other wet areas. Proper installation will prevent darkening due to water accumulation behind the product. Follow TCNA guidelines to ensure proper installation. Individual sheets of this mosaic are not square. Sheets are irregular and combine into a seamless interlocking pattern. Plan your layout accordingly. Dry laying of this product prior to installation is required. For straight cuts on a tile wet saw clear plastic face tape can be applied to keep the mosaic pieces aligned while cutting. Subject to visible scratching. White mortar is recommended for natural stone. Seal and utilize a grout release prior to grouting.

SETTING NATURAL STONE MOSAICS ON A SHOWER FLOOR WITH ARDEX 100% SOLIDS EPOXY ADHESIVE WHITE

ARDEX 100% Solids Epoxy Adhesive White is suitable for each of the following installation methods shown in the Shower Receptors section in the most current edition of TCNA Handbook for Ceramic, Glass, and Stone Tile Installation.

B414-24 Stone, B441-24 Stone, B415-24 Stone, B420-24 Stone,
B426-24 Stone, B431-24 Stone, B421-24 Stone, B422-24 Stone.

IMPORTANT NEXT STEPS:	IMPORTANT WATER CLEANUP STEPS
• Pour Part A (Resin) into Part B (Hardener) bucket and hand mix to achieve color blend. • Mix using a power mixer (approx. 650 RPM) for approx. 2 minutes. • Pour the entire mixture out of the bucket onto the floor or onto a scrape piece of tile. It is very important to get the entire mixture out of the bucket immediately. • Spread a thin layer of epoxy mortar with a flat trowel over a predetermined area of the shower floor. • Using a square notch trowel or a V-notch trowel, spread the epoxy mortar over the same predetermined shower floor area. • Next flatten out all trowel ridges with flat side of trowel striving to achieve 100% coverage over the predetermined shower floor area. • Place the interlocking mosaic sheets into mortar bed over the predetermined shower floor area for 100% coverage. • Tap down and level the mosaic sheets with a grout float over the predetermined area. • Allow mortar to set, harden, and cure.	• Wipe up any epoxy residue with sponges and clean water. • Note: No soap and no chemicals are needed. Just clean water. • Rinse sponges and change the water often. • Finally wipe with cool, clean water & clean sponges. • Use clean microfiber cloths for final wipe down.

Artistic Tile recommends sealing all natural stones before grouting.

SHIRAZ


Shiraz combines traditional mosaic craftsmanship with modern waterjet cutting in a timeless, elegant pattern.





SHIRAZ



Bianco - polished Thassos and Calacatta Gold

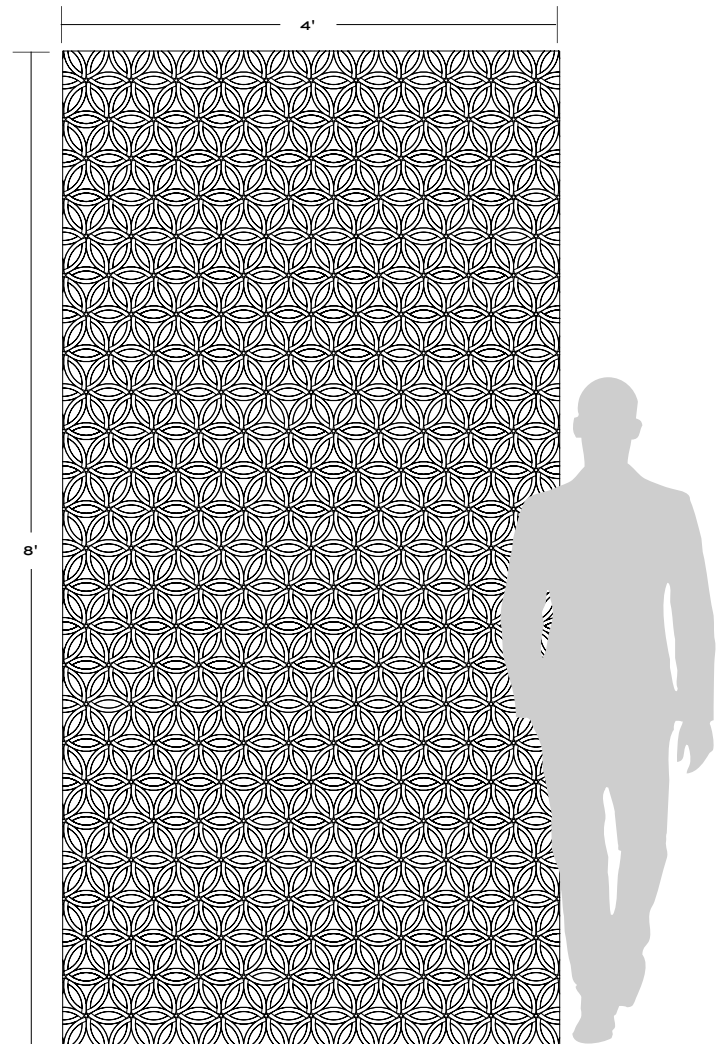

APPLICATIONS									VARIATION		TAILORED TO CUSTOMIZATION	
INTERIOR FLOOR	INTERIOR WALL*	SHOWER WALL*	SHOWER FLOOR*	EXTERIOR FLOOR	EXTERIOR WALL*	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1 V2 V3 V4 	CARPET CUTTING FIELD FINISH MOSAIC SADDLE VANITY TOP WATERJET		
Medium Traffic Commercial	All	Yes, including steam	Yes	No	Yes, non-freeze thaw	No	Yes	Yes				
INSTALLATION/MAINTENANCE										MOSAIC		
SETTING MATERIAL*	GROUT*	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT	 15 1/16" x 13 1/16" x 3/8" (1.37 sf) interlocking sheet		
Mapei Ultraflex 2	Mapei Keracolor Unsanded	As established on sheets	Mapei Mapelastick AquaDefense	Mapei Keracaulk Sanded	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook	No	Required			
NOTES												
*Interior Wall: Crema - not recommended for showers *Shower Wall & Shower Floor: Bianco only, Crema not recommended for showers *Exterior Wall: Bianco only *Setting Material: Alternate mortar options - Mapei Kerabond/Keralastic System or Ardex X4 *Grout: Alternate grout options - Mapei Ultracolor Plus or Ardex FG-C												

15 1/16" x 13 1/16" x 3/8" (1.37 sf)
interlocking sheet

SIDETRACK

Sidetrack brings sophisticated design to a classic form: the hexagon. Inspired by Artistic Tile Sales Executive Jason Berube's vision for a detailed geometric pattern, Sidetrack is a highly graphic field tile with intricate mosaic elements. Simple silhouettes: minute tesserae squares, petite rectangular stripes and bold trapezoids, each in a different material, are artfully combined within the hexagonal shape. Sidetrack is ideal for both walls and floors and is stocked in two colorways: Bianco Dolomiti with Azul Cielo, Thassos, and Calacatta Gold, all honed; and honed Thassos with honed Bianco Dolomiti, polished Bianco Onyx and honed Arabescato.





SIDETRACK



Bianco Dolomiti - Honed



Thassos - Honed

APPLICATIONS									VARIATION		TAILORED TO CUSTOMIZATION	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1 V2 V3 V4		CARPET CUTTING	
Light/Medium Traffic Commercial	All	Yes, including steam	Yes, Linear Drain	No	No	No	No	Yes			FIELD	
											FINISH	
											MOSAIC	
											SADDLE	
											VANITY TOP	
											WATERJET	
INSTALLATION/MAINTENANCE										AVAILABLE SIZES		
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT			
Ardex N23 Microtec Rapid Set ¹	Ardex FG-C Microtec Unsanded ²	As Established on Sheets	Ardex 8+9	Mapei Keracaulk Unsanded	Aquamix Grout Release	Aquamix Concentrated Cleaner	TCNA Handbook	No	Recommended			
NOTES												
¹ Alternate Mortar - Mapei Granirapid System White or Mapei Ultraflex 2												
² Alternate Grout - Mapei Ultracolor Plus FA or Mapei Flexcolor CQ												
										6 3/4" x 8 1/16" x 3/8" (0.37 sf/unit) Honed		

SINUOUS

Sinuous elevates the art of mosaic tile in the modern era. This sleek, sophisticated and utterly seamless mosaic flows beautifully from piece to piece, creating a gracefully woven stream of marble that transforms your space. This is modern mosaic design at its absolute finest. Sinuous is an instant classic, modern, timeless, stunning, and only from Artistic Tile.



SINUOUS



Thassos - Polished

V2



Calacatta Gold - Polished


V3



Ming Green - Polished


V3



APPLICATIONS								VARIATION		TAILORED TO CUSTOMIZATION	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	V1 V2 V3 V4		CARPET CUTTING	
										FIELD	
										FINISH	
										MOSAIC	
										SADDLE	
Medium Traffic Commercial	All	Yes, including steam	No	No	Yes, non-freeze thaw	No	Yes			VANITY TOP	
										WATERJET	
INSTALLATION/MAINTENANCE										AVAILABLE SIZES	
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT	 11 3/8" x 11 3/8" x 3/8" Polished	
Mapei Kerabond w/ Keralastic Additive ¹	Mapei Keracolor Unsanded ²	As established on sheets	Mapei Mapelastic AquaDefense	Mapei Keracaulk Sanded	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook	No	Required ³		
NOTES											
¹ Alternate Mortar: Mapei Granirapid or Ardex X4											
² Alternate Grout: Mapei Flexcolor CQ or Ardex FG-C Microtec Unsanded											
³ Layout the full job before installation											

SPIN


Spin evokes the fine tesserae mosaics of the ancient world in a subtle pattern presented in timelessly beautiful colorways. Semicircular fans are centered on a circular stone and outlined in contrasting colors, and wind across the surface, creating a rhythmic undulation. There are two colorways: Spin Statuary, with classical Statuary marble outlined in bold black marble, and Spin Calacatta Gold, in which the light cloud limestone border provides a delightful on-palette contrast to the Calacatta Gold. Stocked in 12" X 24" interlocking sheets.

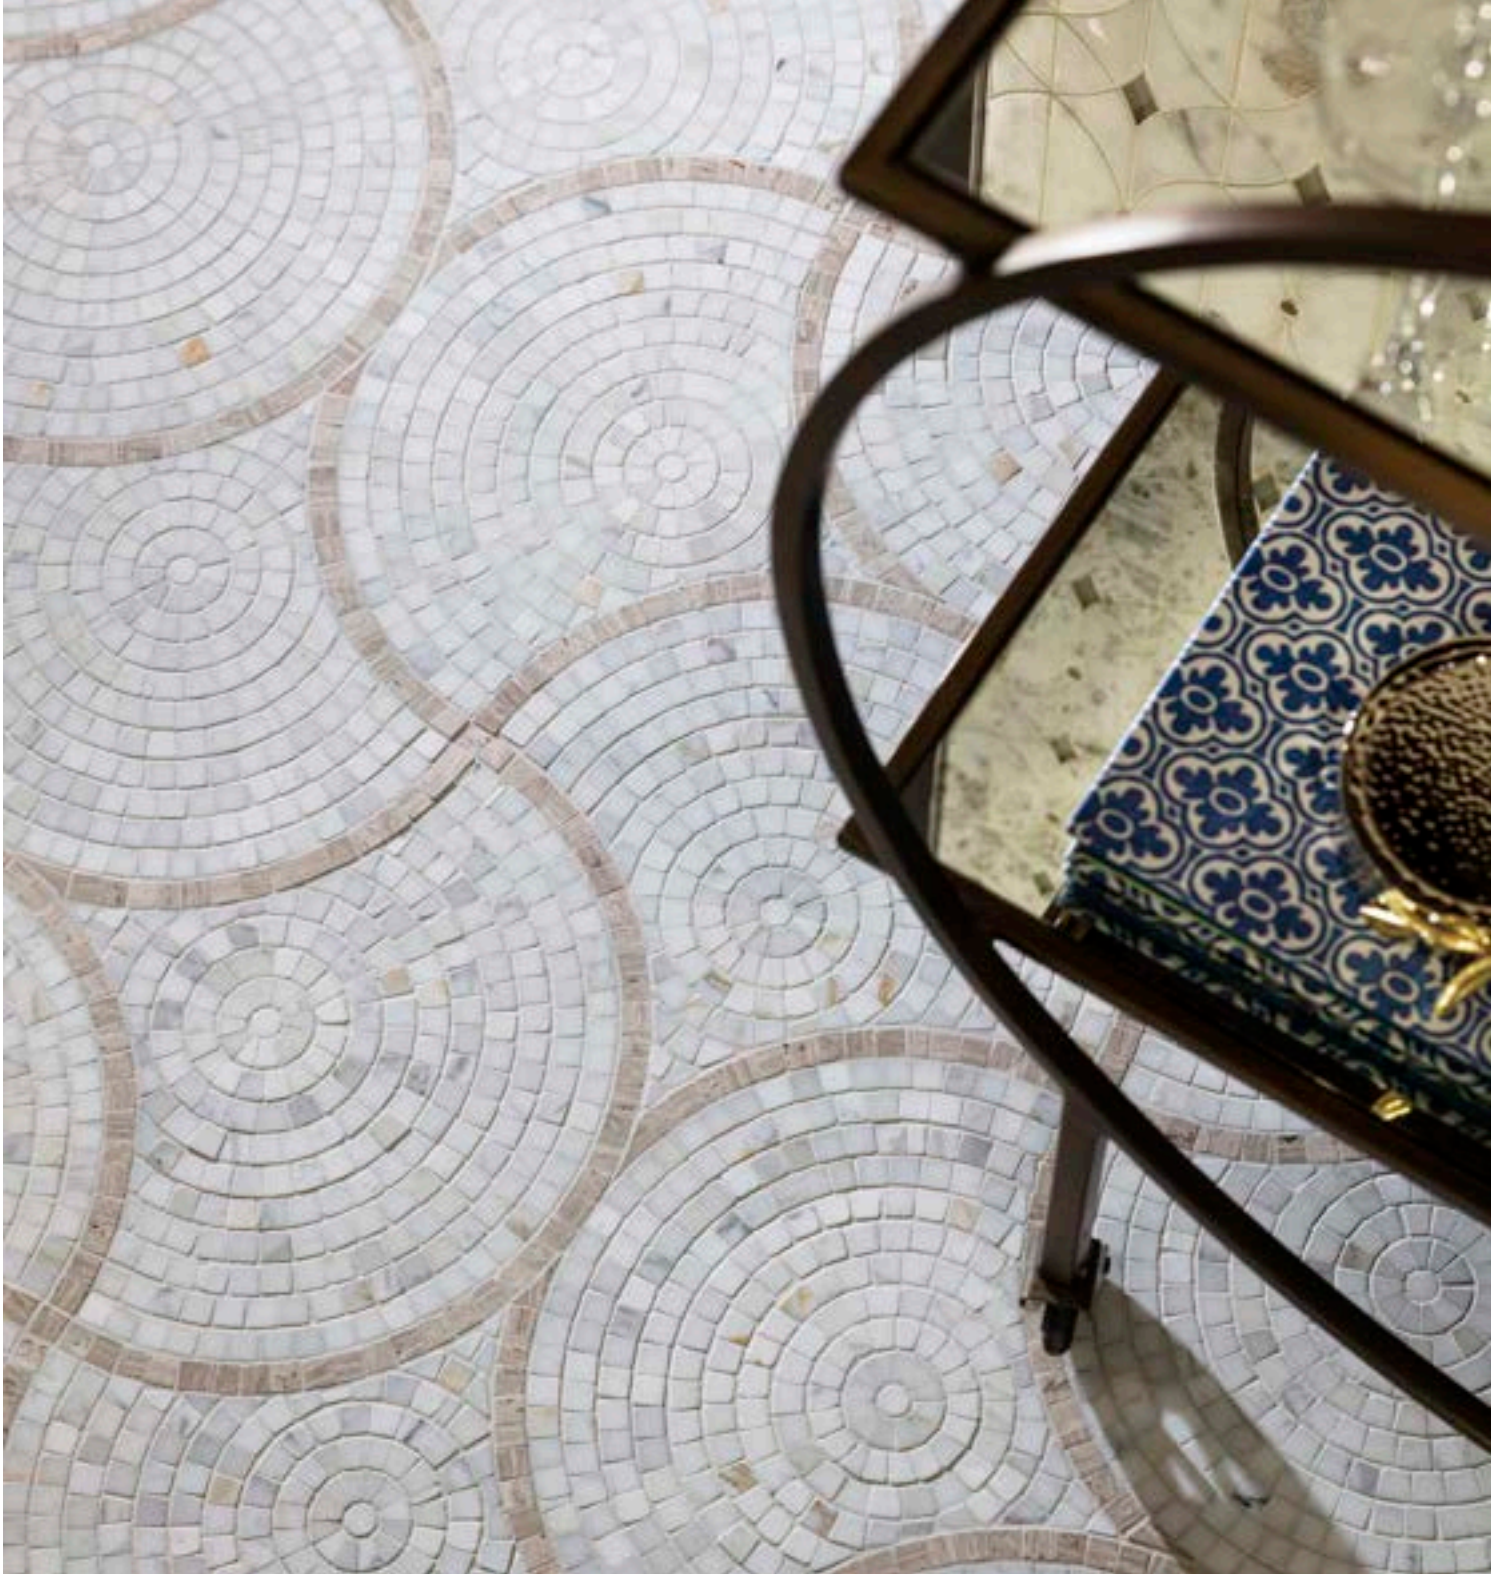


SPIN



Calacatta Gold, Cloud - Mixed Finish

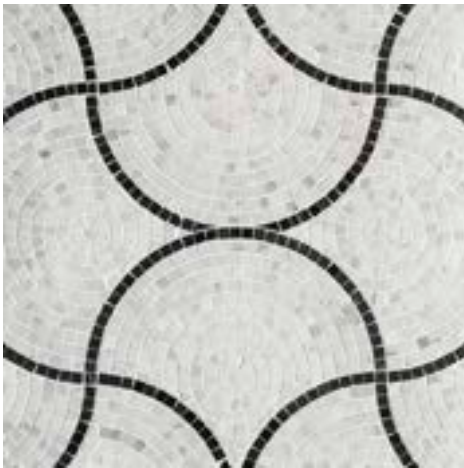

Statuary, China Black - Polished
Special Order Only

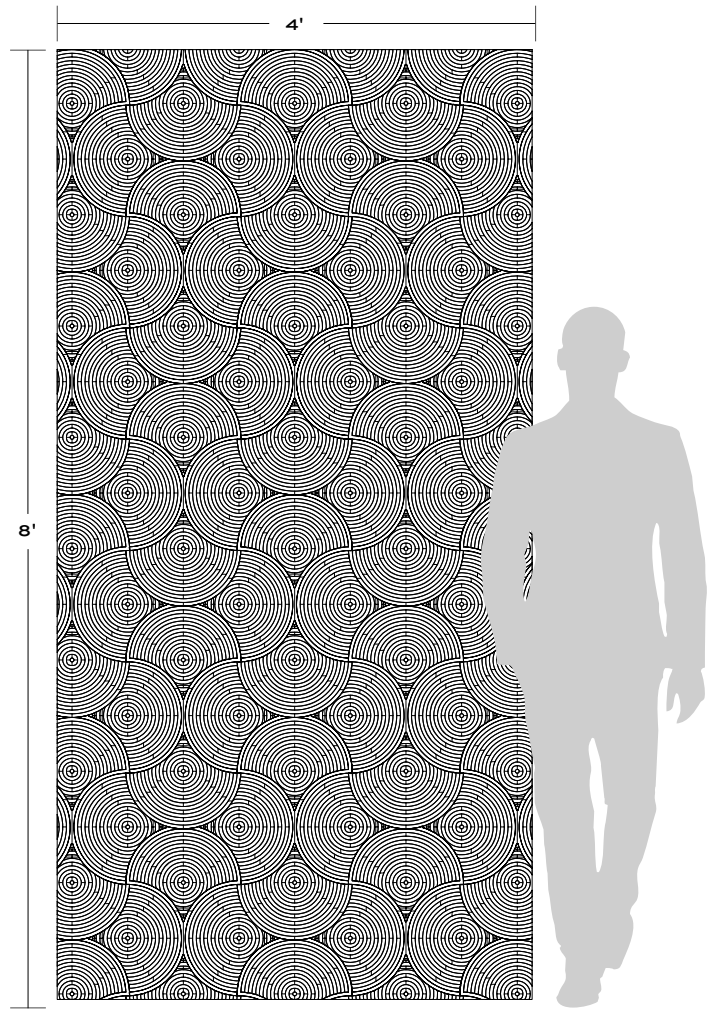


APPLICATIONS									VARIATION			
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1 V2 V3 V4			
Commercial Light/ Medium	All	Yes, including steam ¹	Yes	No	Yes, non-freeze thaw	No	Yes	Yes				
INSTALLATION/MAINTENANCE										STONE MOSAIC		
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT			
Ardex X4 Tile & Stone Mortar ²	Ardex FG-C Microtec Unsanded ³	As established on sheets	Ardex 8+9	Ardex SX	AquaMix Sealers Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook ⁴	Maintain Sheet Orientation	Sample ⁵	MOSAIC 12" x 24-1/8" x 3/8" (2.01 sf) Mixed Finish or Polished SOLD IN A 2-PART UNIT		
NOTES												
¹ Cloud limestone will darken when installed in a wet area. ² Alternative mortar: Mapei Kerabond w/ Keralastic Additive or Mapei Ultraflex 2 ³ Alternative grout: Mapei Flexcolor CQ or Mapei Ultracolor Plus FA ⁴ IMPORTANT: Proper installation will prevent darkening due to water accumulation behind the product. Follow TCNA guidelines to ensure proper installation. ⁵ Layout for overview of material before installation Tech notes: Interlocking sheet. Sold in a 2 part A and B unit The installation of intricate mosaic patterns may require the use of a mosaic nipper to hand cut pieces along the edge to fit, or conduct repairs throughout the installation.												

STUDS


There is nothing formulaic about artistic tile's studs. Simultaneously fresh and retro, the applications for these round stone mosaics are limitless. Circular tiles are a staple of residential and commercial design; our Studs are unique in their smaller size and our use of classic stone in their creation. A traditional yet relaxed aesthetic.



STUDS



Bianco Carrara Polished




Calacatta Gold Polished



Blue Blend Polished
(Thassos, Azul Cielo, Ming Green)



Thassos Polished

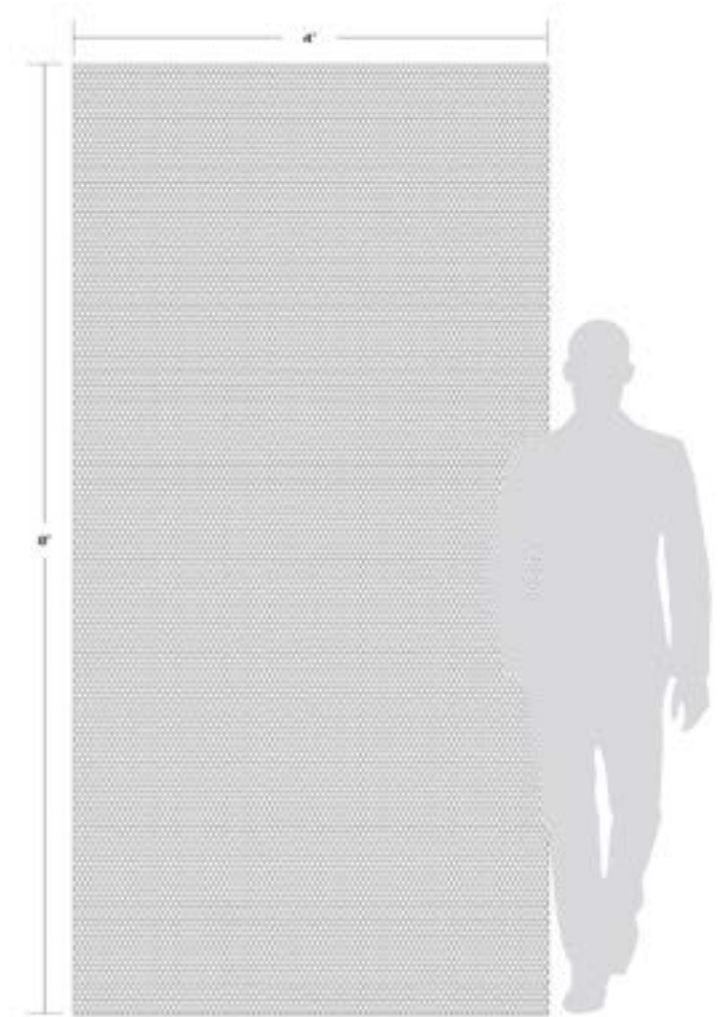

APPLICATIONS							
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP
Commercial Light/ Medium	All	Yes, including steam	Yes	No	Yes, non-freeze thaw	No	Yes

VARIATION			
V1	V2	V3	V4

INSTALLATION/MAINTENANCE									
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT
Mapei Kerabond w/ Keralastic Additive ¹	Mapei Keracolor Unsanded ²	As established on sheets	Mapei Mapelastic Aquadefense	Mapei Keracaulk Sanded	AquaMix Sealers Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook	Maintain Sheet Orientation	Sample ³

NOTES
¹ Alternative mortar: Mapei Granirapid 2-Part System or Ardex X4 Tile & Stone Mortar ² Alternative grout: Mapei Flexcolor CQ ³ Layout for overview of material before installation Tech notes: Dry-layout prior to installation is required in order to ensure that grout joints between sheets are not visible; two opposing sides of each sheet interlock and the other two opposing side align; trimming of the mesh backing may be necessary - Mapei Ultracolor Plus sanded- suitable for grout joints of 1/16" - 1"

STONE MOSAIC
1/2" CIRCLE MOSAIC 12" x 12-1/3" x 3/8" (1.03 sf) Polished


TAPPETI

Inspired by the intricate patterns and color play of textile weaves, our Tappeti mosaic combines four naturally vibrant stones into a fabric-like weft that conjures embroidered rugs and wall hangings, but in a smooth stone surface. Each colorway unites four harmonious colors for a unique visual effect. Available in Lilac, Blue, Red or Green blends.



PICTURED: TAPPETI LILAC POLISHED
& LILAC POLISHED SLAB

TAPPETI

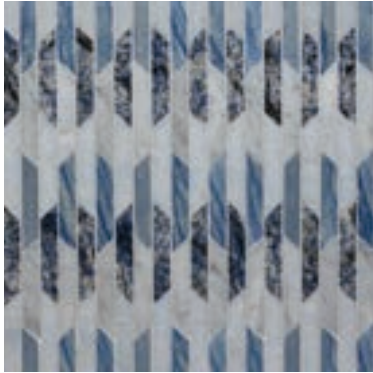

Blue Blend Polished
Azul Bahia, Azul Macubas, Azul Cielo,
Bianco Carrara




Red Blend Polished
Tongshan Red, Red Travertine, Pink Cream,
China Beige



Green Blend Polished
Verde Alpi, Green Jade, Emerald Green,
Light Green Jade



Lilac Honed
Lilac, Bianco Carrara, Thassos, Bianco Dolomiti

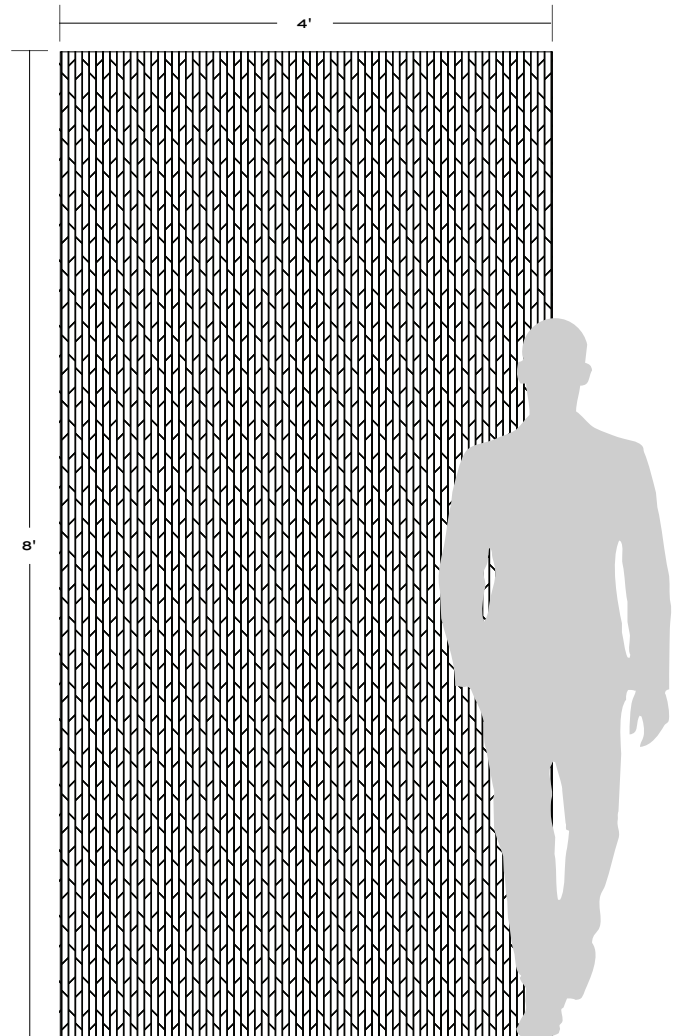

APPLICATIONS									VARIATION				TAILORED TO CUSTOMIZATION	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1 V2 V3 V4				CARPET CUTTING	
Light/Medium Traffic Commercial	All	All	Yes, linear drain	No	Yes, non-freeze thaw	No	Yes	Yes					FIELD	
													FINISH	
													MOSAIC	
													SADDLE	
													VANITY TOP	
													WATERJET	
INSTALLATION/MAINTENANCE										AVAILABLE SIZES				
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT	POLISHED MOSAIC⁵ 12 3/4" x 13 7/16" x 3/8" (1.19 sf/unit) <i>Mesh Mounted Interlocking Sheets</i>				
Ardex X4 Tile & Stone Mortar ¹	Ardex FG-C Microtec Unsanded ²	As established on sheets	Ardex 8 + 9	Ardex SX	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook ³	Maintain sheet orientation	Recommended ⁴					
NOTES														
¹ Alternate Mortar - Mapei Ultraflex 2 or Mapei Kerabond with Keralastic Additive Alternate Mortar for Green Blend only - Mapei Granirapid White 2-part System or Ardex N23 White Microtec Rapid Set ² Alternate Grout - Mapei Flexcolor CQ or Mapei Ultracolor Plus FA ³ IMPORTANT: Proper installation will prevent darkening due to water accumulation behind the product. Follow TCNA guidelines to ensure proper installation. ⁴ Layout for color and vein selection before installation Dry Layout - Sample for Tappeti Lilac only ⁵ Tappeti Lilac - Honed Mosaic														

TESSUTO


Tessuto replicates the intertwining intricacies of multi-color woven fabric on a grander scale. This stone mosaic pieces together eight different marbles, limestones, and onyx; Thassos, Smoke, Sable Onyx, Bardiglio Imperiale, Azul Cielo, Grey Foussana, Bianco Onyx, and Grafite. The culmination is a remarkable woven pattern that feels fresh, but familiar. Stocked in 14-1/16" X 14-7/16" interlocking sheets.





TESSUTO



Thassos, Smoke, Sable Onyx, Bardiglio Imperiale, Azul Cielo, Grey Foussana, Bianco Onyx & Grafite

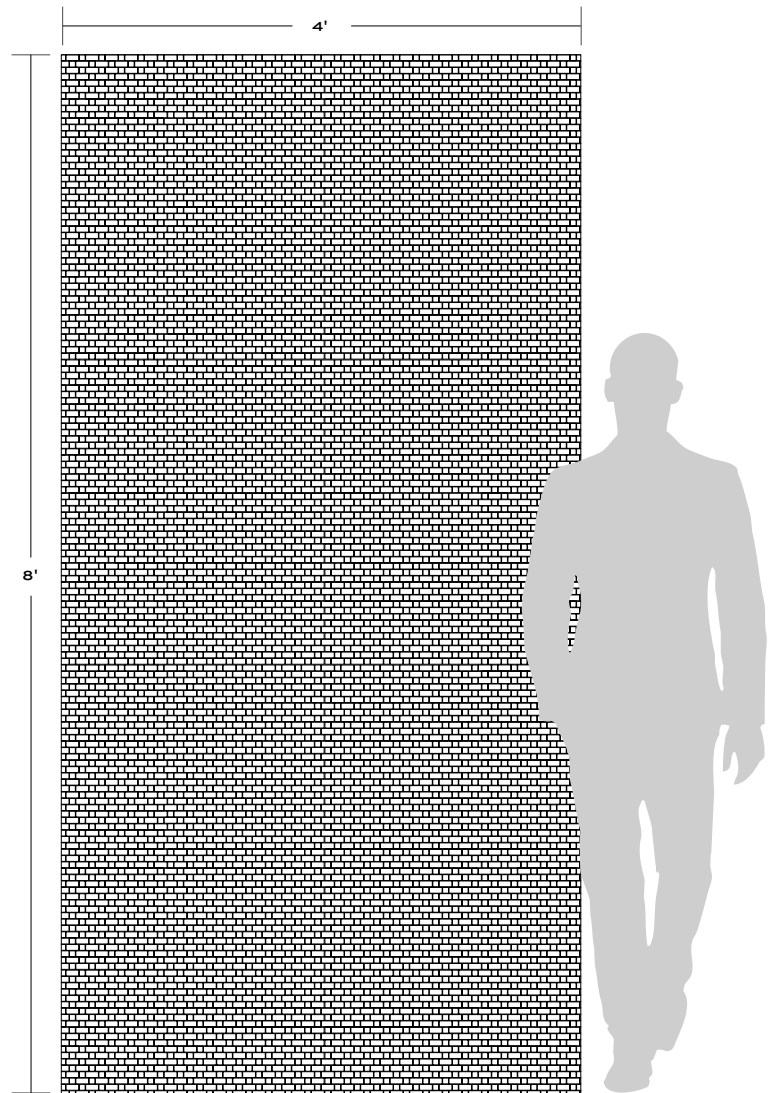

APPLICATIONS									VARIATION		
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1 V2 V3 V4 		
Commercial Light/ Medium	All	Yes, Conventional Only	No	No	No	No	No	Yes			
INSTALLATION/MAINTENANCE										MOSAIC	
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT	 14 1/16" x 14 7/16" x 3/8" (1.41 sf/unit) interlocking sheets	
Ardex N23 White Microtec Rapid Set ¹	Ardex FG-C Microtec Unsanded ²	As established on sheets	Ardex 8 + 9	Ardex SX	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook ³	Maintain sheet orientation	Sample ⁴		
NOTES											
¹ Alternate Mortar - Mapei Granirapid White 2-part System ² Alternate Grout - Mapei Ultracolor Plus or Mapei Flexcolor CQ ³ Showers: Product MUST be installed in accordance with current TCNA Handbook Stone Methods. The NSI Recommends Installing Resin-Backed Stone With Epoxy-Based Setting Materials. Consult Your Setting Materials Manufacturer For Specific Recommendations ⁴ Layout for overview of material before installation											

TRIANGOLO


Triangolo is an artful blend of six complementary stones in a unique geometric pattern. Part of the SPQR Collection of patterns that draw inspiration from Ancient Rome's timeless mosaics, the collection applies old-world marble species in refreshing patterns that fade into and out of color, for an exciting complement to neutral palettes.



TRIANGOLO



Green Blend - Polished

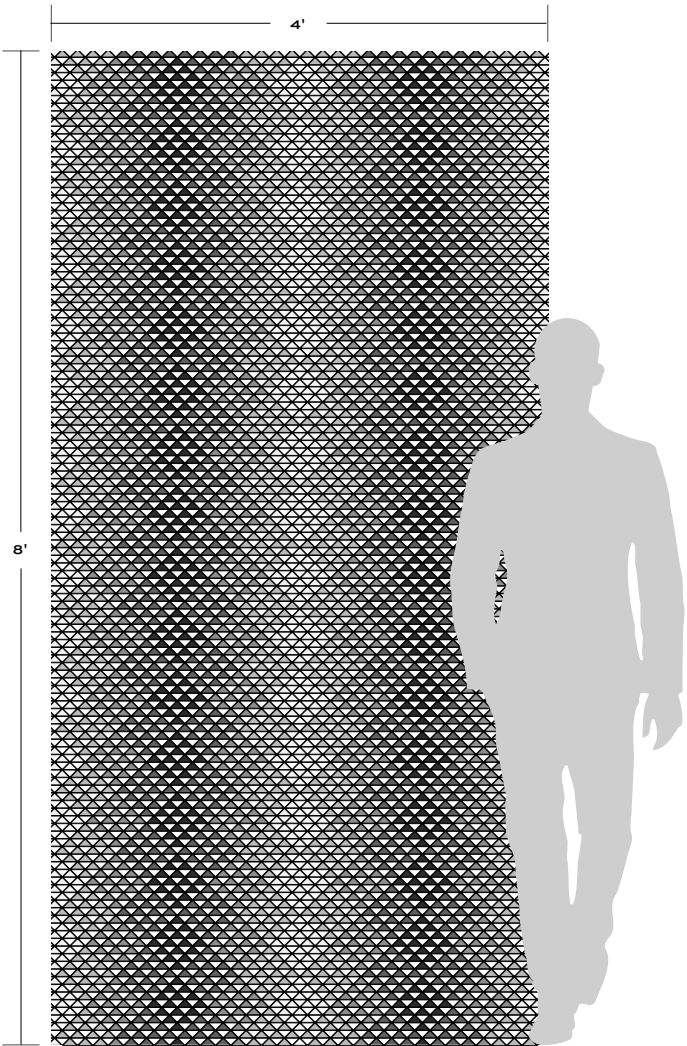


APPLICATIONS									VARIATION				
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1 V2 V3 V4				
Light/Medium Traffic Commercial	All	Yes, including steam	Yes, including steam	No	Yes, non-freeze thaw	No	No	Yes					
INSTALLATION/MAINTENANCE										MOSAIC			
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT				
Ardex N23 White Microtec Rapid Set ¹	Ardex FG-C Microtec Unsanded ²	As established on sheets	Ardex 8+9	Ardex SX	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook ³	Maintain sheet orientation	Sample ⁴	TRIANGOLO 11 15/16" x 23 7/8" x 3/8" Mesh mounted interlocking sheet			
NOTES													
¹ Alternate mortar - Mapei Granirapid 2-Part System or Ardex 100% Solids Epoxy Adhesive White is recommended													
² Alternate grout - Mapei Keracolor Unsanded or Ardex DG 1 – One Component Grout													
³ IMPORTANT: Proper installation will prevent darkening due to water accumulation behind the product. For showers the product must be installed in accordance with current TCNA Handbook Stone Methods.													
⁴ Layout for overview of material before installation. Individual sheets of this mosaic are not square. Sheets are irregular and combine into a seamless interlocking pattern. Plan your layout accordingly. White mortar is recommended for natural stone Sold in an A and B Set, 3-Sets (6-pcs) Per Box													


TRIANGOLO

INSTALLATION GUIDE

STEP 1

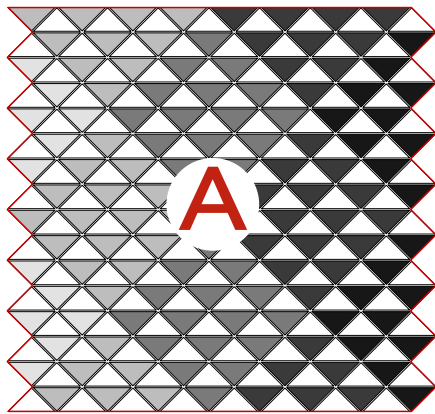


PART A

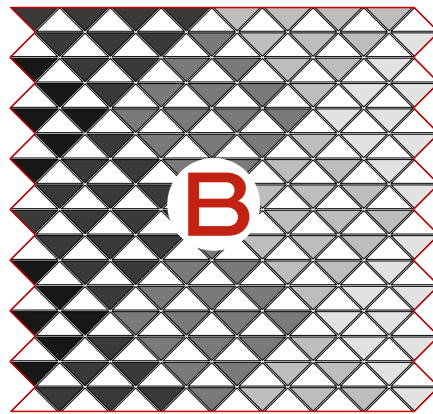


PART B

STEP 2

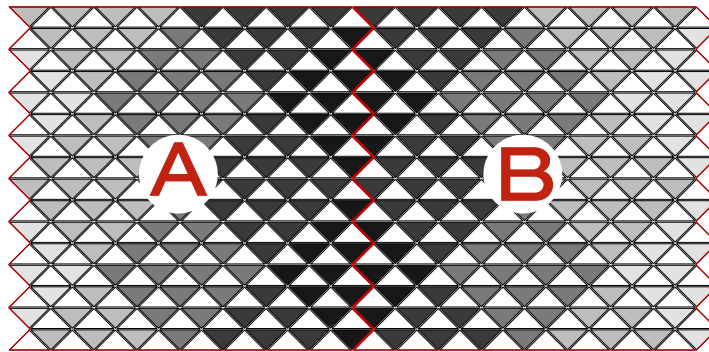

COMPLETE UNIT

STEP 3

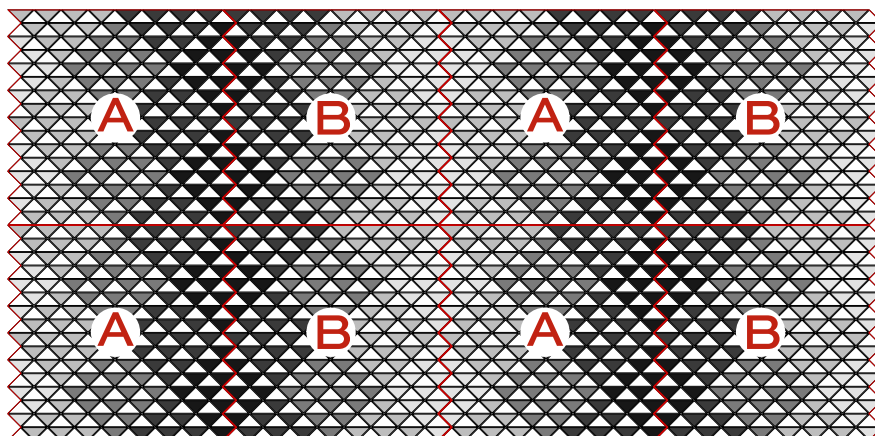



FOUR UNIT REPEAT

TEXTURA COLLECTION

The Textura Collection's refined finishes are etched into luxurious stone, making each tile and pattern a subtle, sophisticated composition. A range of textured stone field tiles join an array of textured mosaics in a tonally consistent palette that's understated, elegant and sleek.



TEXTURA COLLECTION

	BIANCO CARRARA - mixed finish	NERO ITALIA - mixed finish
1-1/4" HEXAGON MOSAIC		
CHEVRON MOSAIC		

APPLICATIONS								VARIATION		TAILORED TO CUSTOMIZATION	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP			CARPET CUTTING	
See Notes Below ¹	All	Yes, including steam ²	Yes, including steam ²	No	Yes, non-freeze thaw	No	Yes			FIELD	
										FINISH	
										MOSAIC	
										SADDLE	
VANITY TOP											
WATERJET											
INSTALLATION/MAINTENANCE										AVAILABLE SIZES	
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT	1 1/4" HEXAGON MOSAIC 11 5/8" x 12 1/8" x 3/8" (0.97 sf) interlocking sheets Mixed Finish Bianco Carrara, Grafite & Nero Italia	
Ardex X4 White Tile	Mapei Ultracolor Plus Sanded	As Established On Sheets	Ardex B + 9	Ardex SX Silicone Sealant	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook	No	Required		
NOTES										CHEVRON MOSAIC sold in a 2 part unit 13 7/8" x 7 7/8" x 3/8" (0.69 sf) interlocking sheets Mixed Finish Bianco Carrara, Grafite & Nero Italia	
¹ Chevron & Braid Mosaics - Light traffic commercial, Hexagon Mosaic - Medium traffic commercial ² Bianco Carrara & Nero Italia - Yes, including steam ² Grout: Ardex FL Rapid Set Sanded Bianco Carrara - Ardex FG-C Microtec Unsanded Design Note: Chevron Mosaic sold in A and B sets for more random layout											

TEXTURA COLLECTION



Grey Foussana



Bianco Carrara



Smoke




Thassos




Belgian Bluestone

APPLICATIONS								VARIATION		TAILORED TO CUSTOMIZATION		
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP			CARPET CUTTING		
Commercial Light/ Medium ¹	All	See Notes Below ²	See Notes Below ³	No	Yes, non-freeze thaw ⁴	No	Yes			FIELD		
										FINISH		
										MOSAIC		
										SADDLE		
								VANITY TOP				
								WATERJET				
INSTALLATION/MAINTENANCE									AVAILABLE SIZES			
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT	 1 1/4" HEXAGON MOSAIC 11 5/8" x 12 1/4" x 3/8" (0.97 sf) interlocking sheets Mixed Finish Bianco Carrara, Grafite & Nero Italia		
See Notes Below ⁵	See Notes Below ⁶	1/8"	Ardex 8 + 9	Ardex SX Silicone Sealant	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook	No	Required			
NOTES										 CHEVRON MOSAIC sold in a 2 part unit 13 7/8" x 7 1/8" x 3/8" (0.69 sf) interlocking sheets Mixed Finish Bianco Carrara, Grey Foussana, Grafite & Nero Italia		
¹ Smoke and Grey Foussana Residential Light ² Smoke & Grey Foussana - Conventional only Bianco Carrara, Balkan Beige & Belgian Bluestone- Yes, including steam ³ Smoke & Grey Foussana - No Bianco Carrara - Yes Belgian Bluestone & Thassos- Yes, including steam/mosaic format only ⁴ Smoke & Grey Foussana - No ⁵ Smoke & Grey Foussana - Ardex N23 White Microtec Rapid Set Bianco Carrara, Thassos & Belgian Bluestone - Ardex X77 White Microtec Fiber Reinforced Mortar ⁶ Smoke, Grey Foussana, Bianco Carrara, Belgian Bluestone - Ardex FL Rapid Set Sanded Thassos - Ardex FG-C Microtec Unsanded												
Tech Notes: Do not use color enhancer. White mortar is recommended for natural stone. Smoke & Grey Foussana - Seal and utilize a grout release prior to grouting. Install with Ardex N23 White or Mapei Granirapid White System.												


TEXTURA COLLECTION

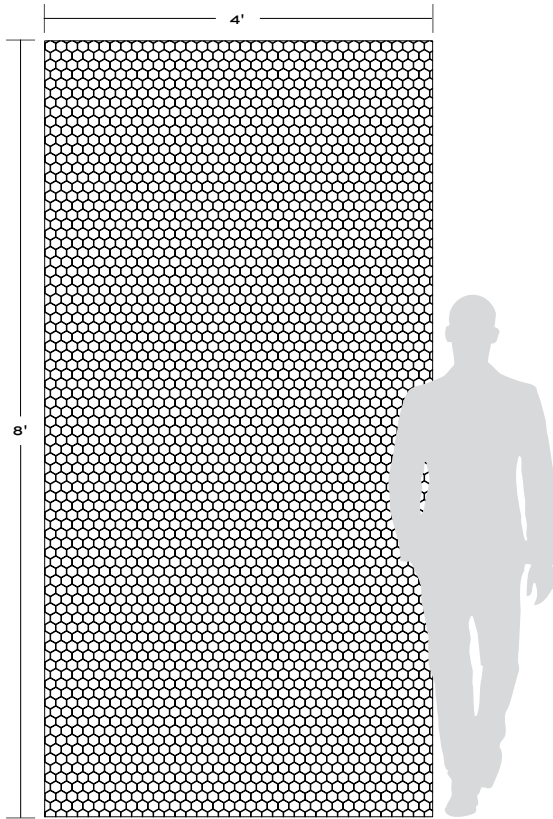

Textura 1 1/4 Hexagon Mosaic

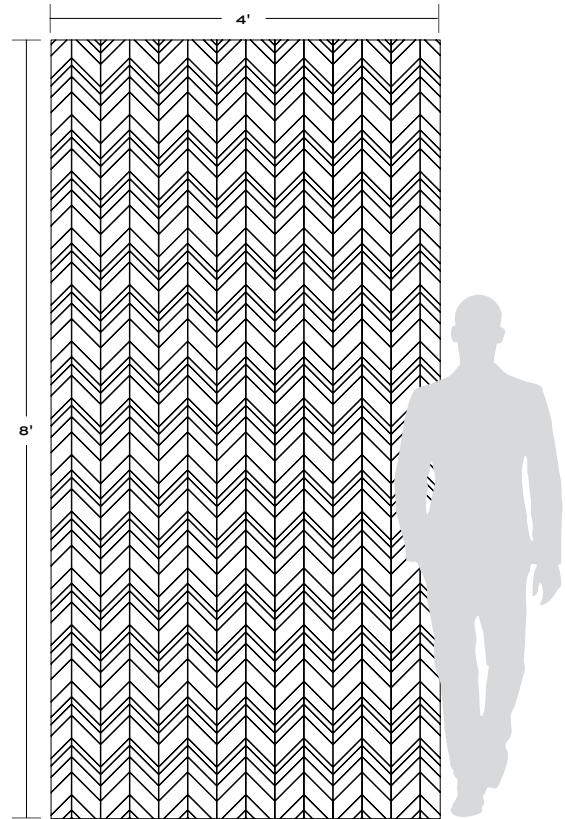

Textura Chevron Mosaic

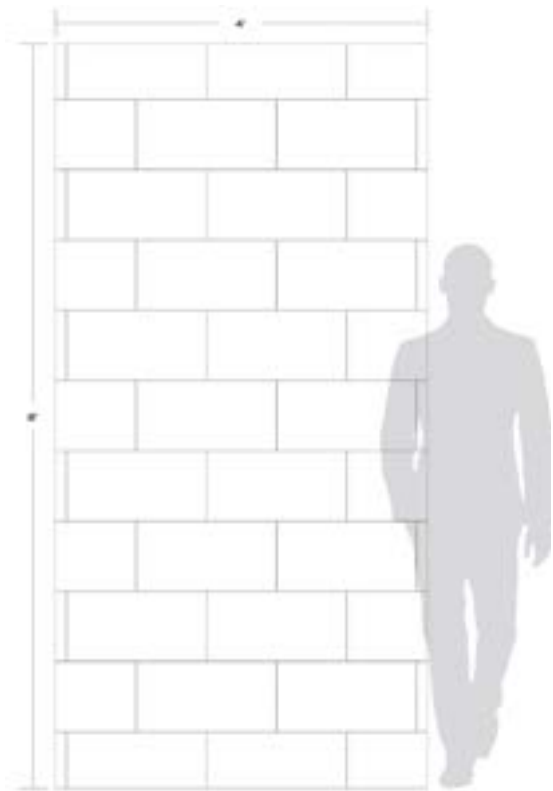


Textura Field Tile

THIN HERRINGBONE

A classic pattern refined for modern applications, Thin Herringbone updates a timeless style, precisely cut in lean bricks from fine marble. Available in seven distinct colorways, Thin Herringbone is a versatile mosaic sure to spruce up any space.

PICTURED: THIN HERRINGBONE NERO

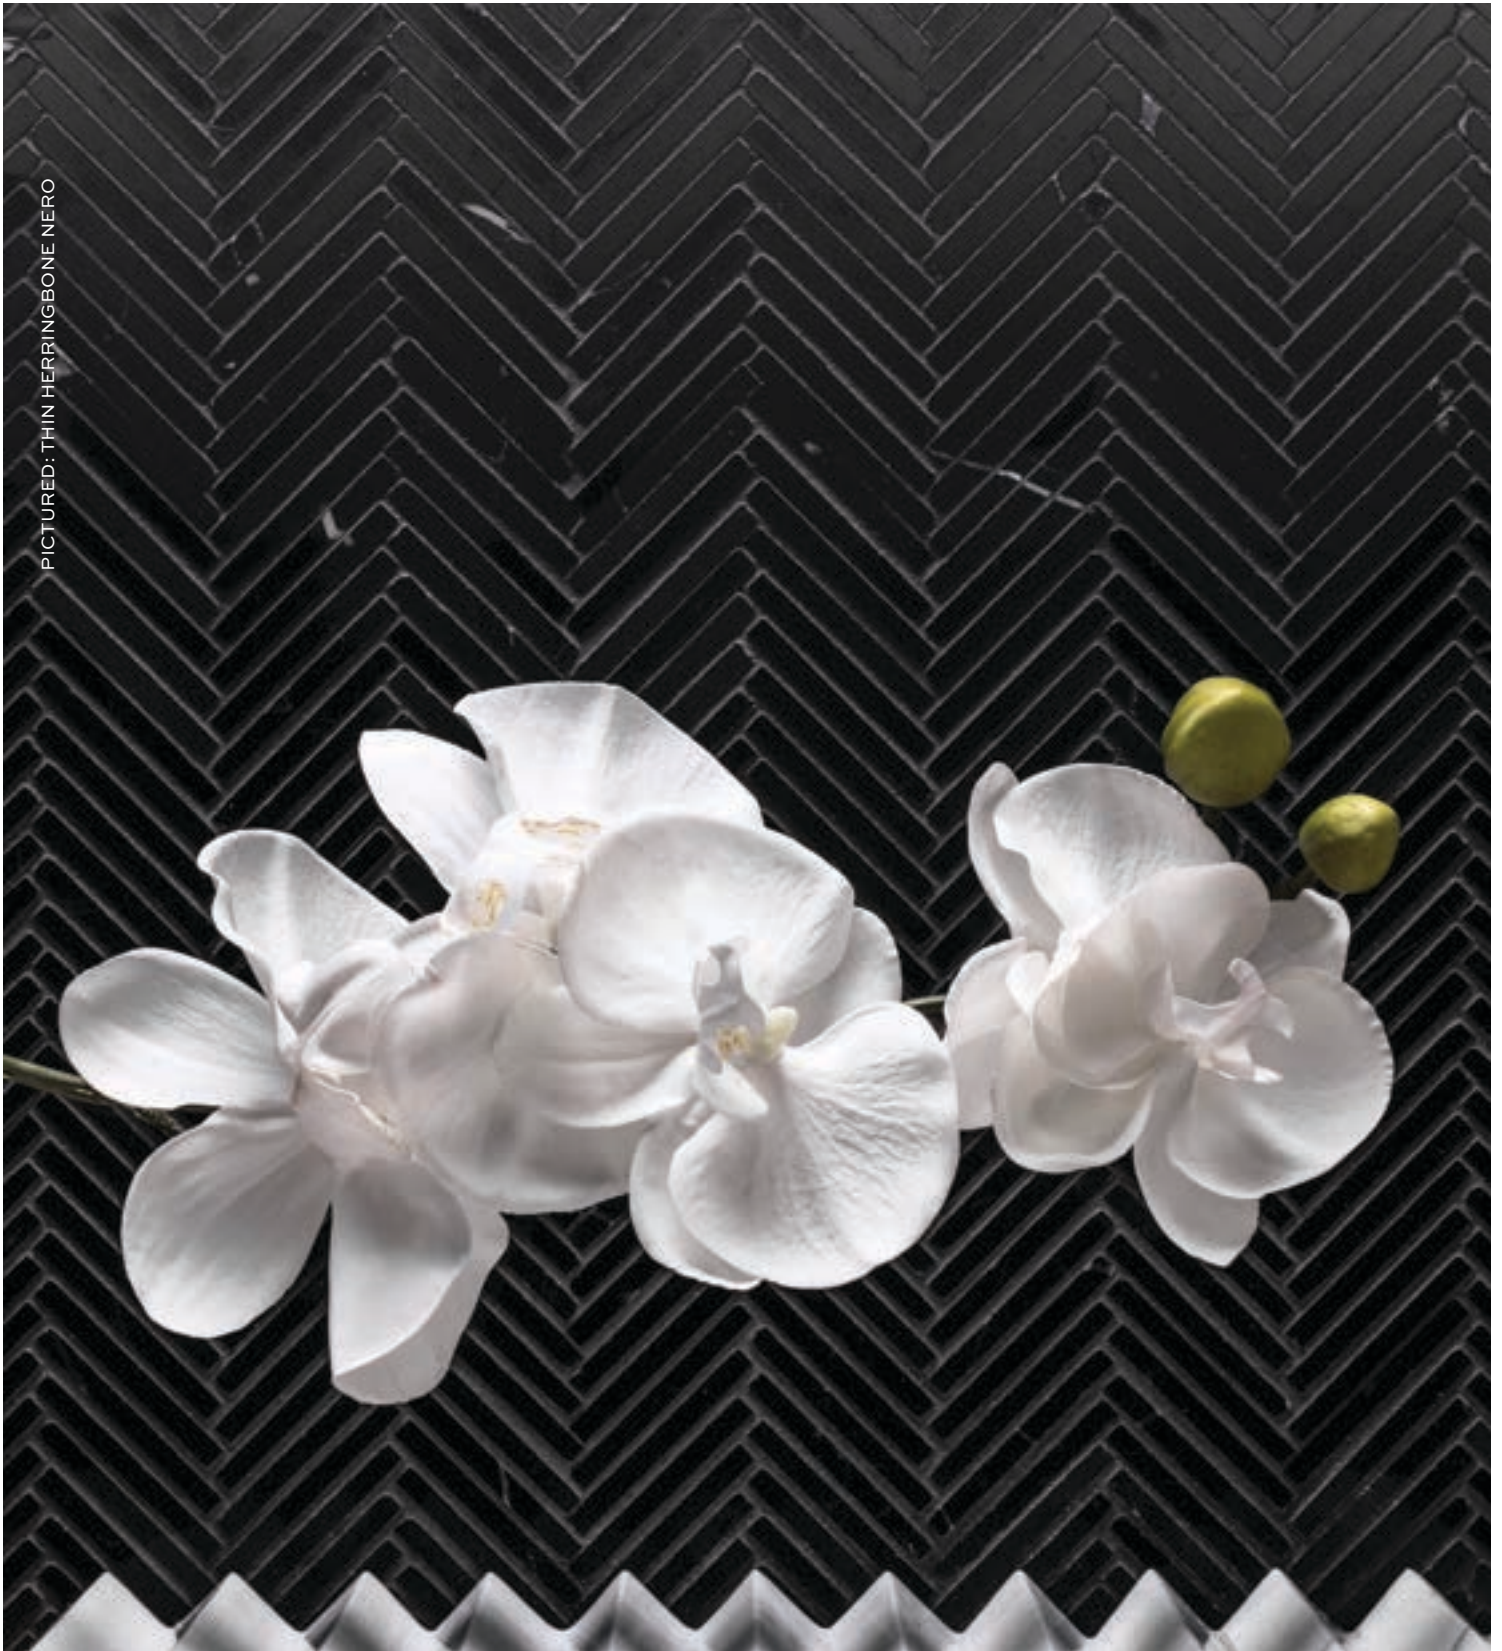

THIN HERRINGBONE



Thassos Polished & Honed




Blue Polished
Thassos, Bianco Carrara & Azul Cielo



Nero Polished



Lilac Honed



Bianco Antico Honed



Rosa Portogallo Honed




Vanilla Onyx Honed

APPLICATIONS									VARIATION				TAILORED TO CUSTOMIZATION	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1	V2	V3	V4	CARPET CUTTING	FIELD
Commercial Light/ Medium ¹	All	Yes, including steam ²	Yes, including steam ³	No	Yes, non-freeze thaw ⁴	No	Yes	Yes					FINISH	MOSAIC
													SADDLE	VANITY TOP
													WATERJET	

INSTALLATION/MAINTENANCE									
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT
Ardex X77 White Microtec Fiber Reinforced Mortar ⁵	Ardex FG-C Microtec Unsanded ⁶	As established on sheets	Ardex 8 + 9	Mapei Keracaulk Sanded	Aquamix Sealers Choice Gold	AquaMix Concentrated Cleaner	TCNA Handbook	No	Required

NOTES
¹ Vanilla Onyx - residential light
² Vanilla Onyx - conventional only
³ Bianco Antico - no, Vanilla Onyx - yes, conventional only
⁴ Vanilla Onyx - no
⁵ Alternate Setting Materials: Ardex X4 White Tile & Stone Mortar and Arex 100% Solids Epoxy Adhesive White
⁶ Alternate Grout: Ardex FL Rapid Set Sanded or Ardex DG 1 - One Component Grout
Tech Note: Individual sheets of this mosaic are not square. Sheets are irregular and combine into a seamless interlocking pattern. Plan your layout accordingly. Dry laying of this product prior to installation is required. Massage joints when blending individual sheets. White mortar is recommended for natural stone. The installation of intricate mosaic patterns may require the use of a mosaic nipper to hand cut pieces along the edge to fit or conduct adjustments throughout the installation. For straight cuts on a tile wet saw clear plastic face tape can be applied to keep the mosaic pieces aligned while cutting. Seal and utilize a grout release prior to grouting.

WATERJET MOSAIC

(0.88 sf/unit)
Mesh mounted interlocked sheet

SETTING NATURAL STONE MOSAICS ON A SHOWER FLOOR WITH ARDEX 100% SOLIDS EPOXY ADHESIVE WHITE

ARDEX 100% Solids Epoxy Adhesive White is suitable for each of the following installation methods shown in the Shower Receptors section in the most current edition of TCNA Handbook for Ceramic, Glass, and Stone Tile Installation.

B414-24 Stone, B441-24 Stone, B415-24 Stone, B420-24 Stone,
B426-24 Stone, B431-24 Stone, B421-24 Stone, B422-24 Stone.

IMPORTANT NEXT STEPS:	IMPORTANT WATER CLEANUP STEPS
• Pour Part A (Resin) into Part B (Hardener) bucket and hand mix to achieve color blend. • Mix using a power mixer (approx. 650 RPM) for approx. 2 minutes. • Pour the entire mixture out of the bucket onto the floor or onto a scrape piece of tile. It is very important to get the entire mixture out of the bucket immediately. • Spread a thin layer of epoxy mortar with a flat trowel over a predetermined area of the shower floor. • Using a square notch trowel or a V-notch trowel, spread the epoxy mortar over the same predetermined shower floor area. • Next flatten out all trowel ridges with flat side of trowel striving to achieve 100% coverage over the predetermined shower floor area. • Place the interlocking mosaic sheets into mortar bed over the predetermined shower floor area for 100% coverage. • Tap down and level the mosaic sheets with a grout float over the predetermined area. • Allow mortar to set, harden, and cure.	• Wipe up any epoxy residue with sponges and clean water. • Note: No soap and no chemicals are needed. Just clean water. • Rinse sponges and change the water often. • Finally wipe with cool, clean water & clean sponges. • Use clean microfiber cloths for final wipe down.

Artistic Tile recommends sealing all natural stones before grouting.


WHIRLWIND

Feel the energy as Whirlwind sweeps across a space, giving life and motion to stone. This gorgeous mosaic pattern swirls hypnotically in Calacatta Gold and Smoke, or select your favorite from our library of classic natural stones.




PICTURED: WHIRLWIND SMOKE


WHIRLWIND




BIANCO CARRARA (Special Order Only)
Polished




CALACATTA GOLD
Polished




SMOKE
Honed



AZUL CIELO (Special Order Only)
Polished

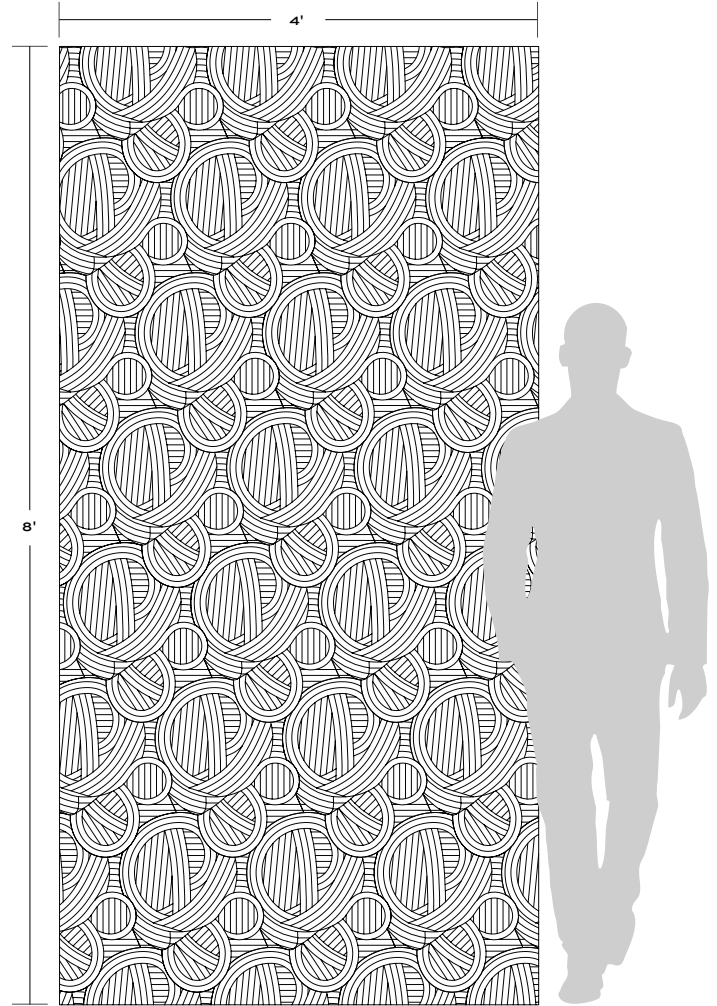

APPLICATIONS									VARIATION		TAILORED TO CUSTOMIZATION	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1 V2 V3 V4 	CARPET CUTTING		
Medium Traffic Commercial	All	Yes, including steam	No	No	No	No	No	Yes		FIELD		
										FINISH		
										MOSAIC		
										SADDLE		
										VANITY TOP		
										WATERJET		
INSTALLATION/MAINTENANCE										MOSAIC		
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT	 16 1/4" x 10 1/2" x 3/8" (1.18 sf/unit) <i>Mesh mounted interlocking sheet</i>		
Mapei Ultraflex 2 White ¹²	Mapei Keracolor Unsanded ³	As established on sheets	Mapei Mapelastick AquaDefense	Mapei Keracaulk Sanded	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	No	No	Recommended			
NOTES												
¹ Alternate Mortar - Ardex X4 ² Smoke must be installed with Mapei Granirapid ³ Alternate Grout - Ardex FG-C												

XANADU FALLS

Xanadu Falls is a rhythmic confluence of stone mosaic pieces in an elegant, sinuous stream. Stocked in a variety of our most popular marbles in honed and polished finishes.



XANADU FALLS




Bianco Dolomiti - Polished




Calacatta Gold - Polished




White Sand - Honed

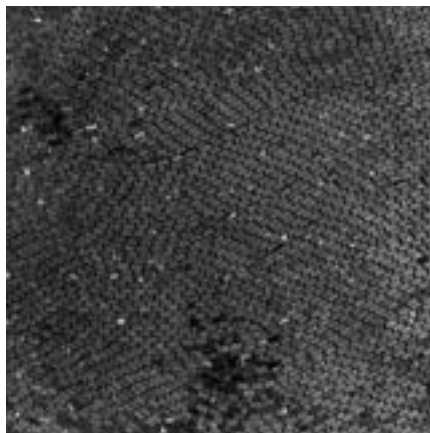

Nero Marquina - Polished

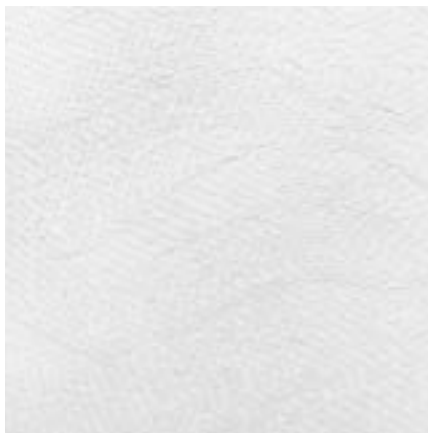

Thassos - Polished

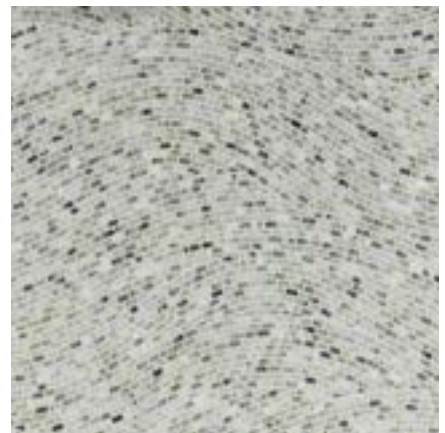


Matcha Verde - Honed

APPLICATIONS									
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	QR LINK
Light/Medium Traffic Commercial	All	Yes, including steam ¹	Yes, including steam ¹	No	Yes, non-freeze thaw	No	Yes	Yes	


VARIATION ²				
V1	V2	V3	V4	
				

INSTALLATION/MAINTENANCE									
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT
Ardex X77 White Microtec Fiber Reinforced Mortar ³	Ardex FG-C Unsanded ⁴	As established on sheets	Ardex B + 9	Ardex SX Silicone Sealant	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook	Maintain sheet orientation	Required

MOSAIC
 (2.83 sf/unit) 26 13/16" x 15 3/16" x 3/8" Mesh mounted interlocking sheet

NOTES
¹ Product MUST be installed in accordance with current TCNA Handbook Stone Methods Ardex 100% Solids Epoxy Adhesive White is recommended for installing this product in shower floor applications ² Matcha Verde - V3 White Sand - V4 ³ Alternate Mortar - Ardex N23 White Microtec Rapid Set or Ardex 100% Solids Epoxy Adhesive White White Sand - Ardex X4 White Tile & Stone Mortar Matcha Verde - Ardex X5 White Medium Bed Mortar ⁴ Alternate Grout - Mapei Keracolor Unsanded or Ardex DG 1 – One Component Grout Tech Note: Individual sheets of this mosaic are not square. Sheets are irregular and combine into a seamless interlocking pattern. Plan your layout accordingly. The installation of intricate mosaic patterns may require the use of a mosaic nipper to hand cut pieces along the edge to fit or conduct adjustments throughout the installation. For straight cuts on a tile wet saw clear plastic face tape can be applied to keep the mosaic pieces aligned while cutting. Seal and utilize a grout release prior to grouting. Material may exhibit random spotting of mineral deposits.

XANADU FALLS

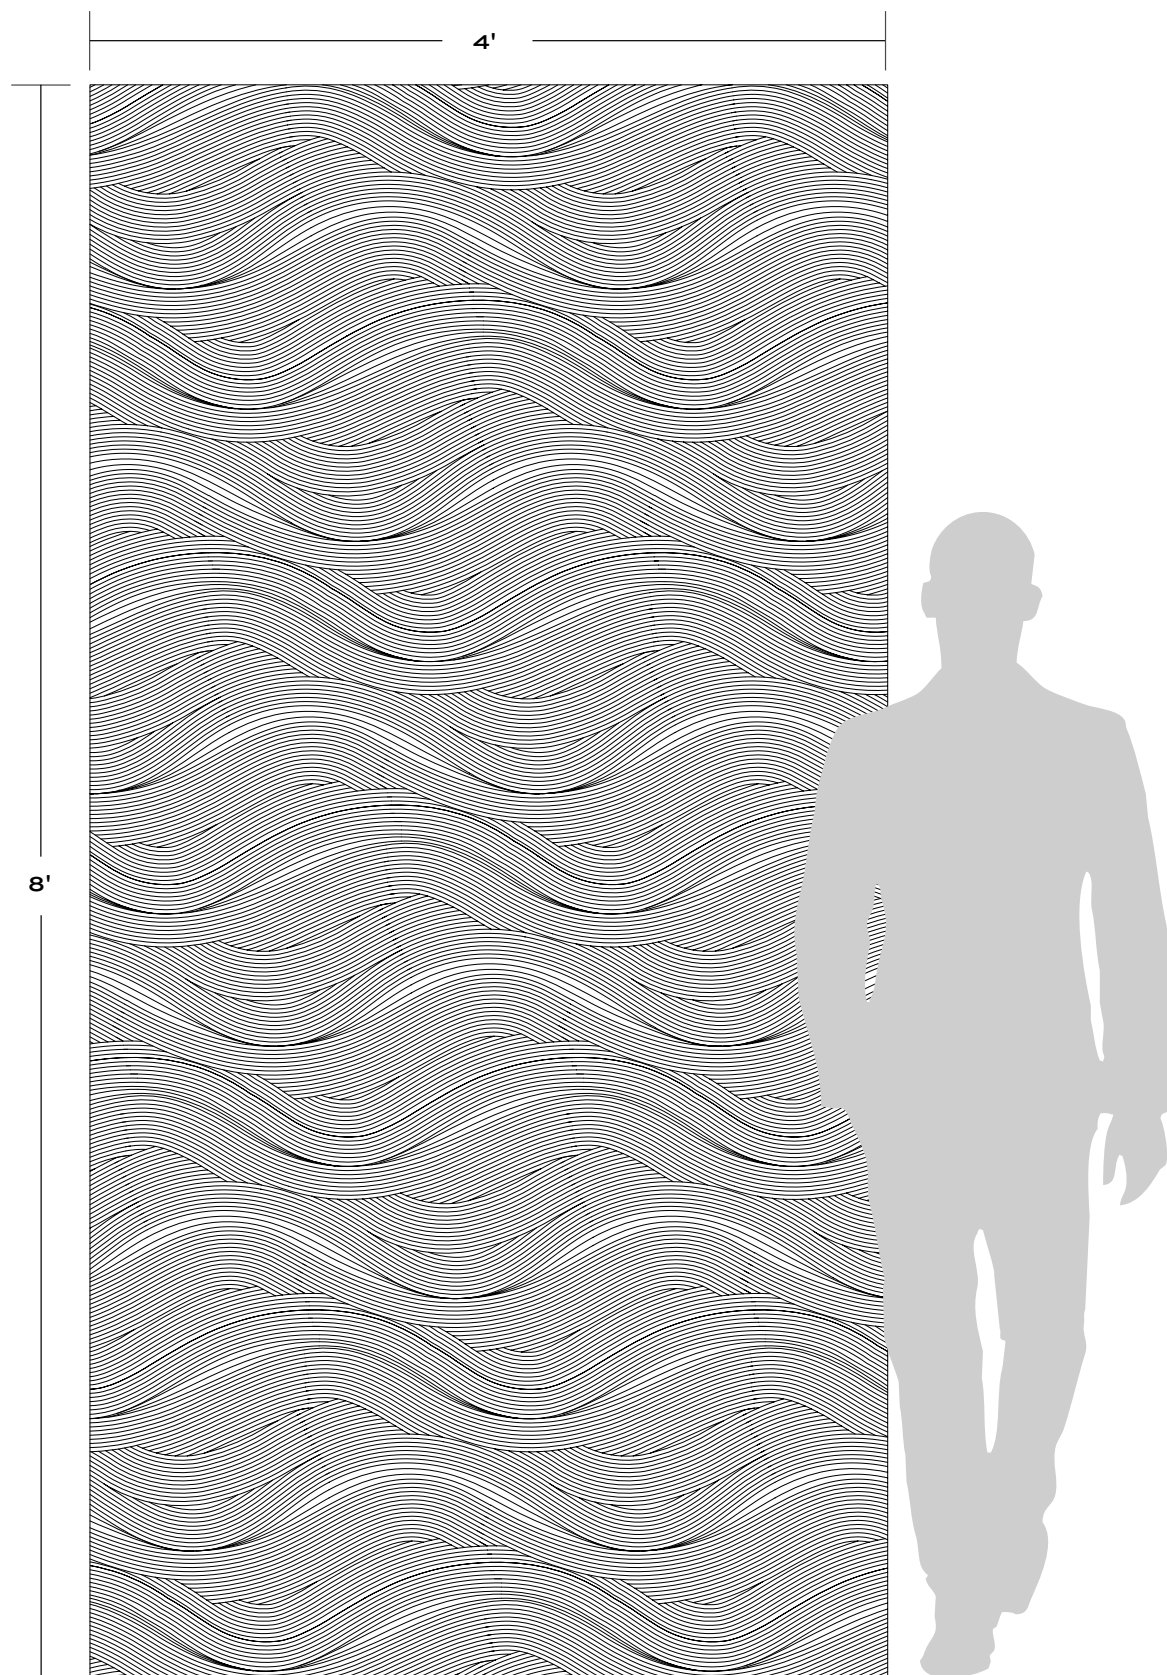

SETTING NATURAL STONE MOSAICS ON A SHOWER FLOOR WITH ARDEX 100% SOLIDS EPOXY ADHESIVE WHITE

ARDEX 100% Solids Epoxy Adhesive White is suitable for each of the following installation methods shown in the Shower Receptors section in the most current edition of TCNA Handbook for Ceramic, Glass, and Stone Tile Installation.

B414-24 Stone, B441-24 Stone, B415-24 Stone, B420-24 Stone,
B426-24 Stone, B431-24 Stone, B421-24 Stone, B422-24 Stone.

IMPORTANT NEXT STEPS:	IMPORTANT WATER CLEANUP STEPS
• Pour Part A (Resin) into Part B (Hardener) bucket and hand mix to achieve color blend. • Mix using a power mixer (approx. 650 RPM) for approx. 2 minutes. • Pour the entire mixture out of the bucket onto the floor or onto a scrape piece of tile. It is very important to get the entire mixture out of the bucket immediately. • Spread a thin layer of epoxy mortar with a flat trowel over a predetermined area of the shower floor. • Using a square notch trowel or a V-notch trowel, spread the epoxy mortar over the same predetermined shower floor area. • Next flatten out all trowel ridges with flat side of trowel striving to achieve 100% coverage over the predetermined shower floor area. • Place the interlocking mosaic sheets into mortar bed over the predetermined shower floor area for 100% coverage. • Tap down and level the mosaic sheets with a grout float over the predetermined area. • Allow mortar to set, harden, and cure.	• Wipe up any epoxy residue with sponges and clean water. • Note: No soap and no chemicals are needed. Just clean water. • Rinse sponges and change the water often. • Finally wipe with cool, clean water & clean sponges. • Use clean microfiber cloths for final wipe down.

Artistic Tile recommends sealing all natural stones before grouting.