


VENEZIA TERRAZZO

MADE IN ITALY, Venezia Terrazzo follows the traditions first developed in Venice of mixing stone chips encased in cement. By its very nature, Terrazzo is a recycled product. The combination of beauty, durability, low maintenance, timeless patterns and vast color offerings has led to a renaissance in use of terrazzo in commercial applications over the past decade. Terrazzo has long been valued for its life cycle characteristics, and can also contribute to the U.S. Green Building Council's (USGBC) credits for new construction.




PICTURED: VENEZIA TERRAZZO WHITE & VENEZIA TERRAZZO LIGHT GREY


VENEZIA TERRAZZO

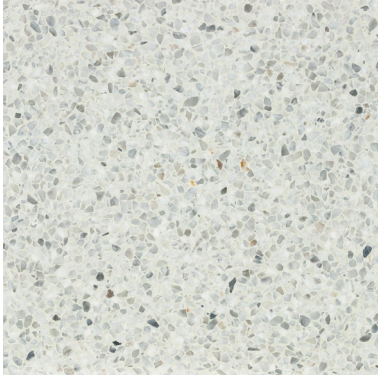

White Polished (also stocked in Honed)

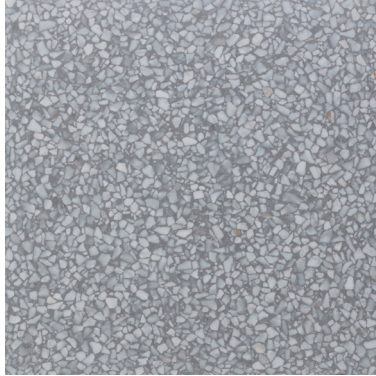


Light Grey Honed

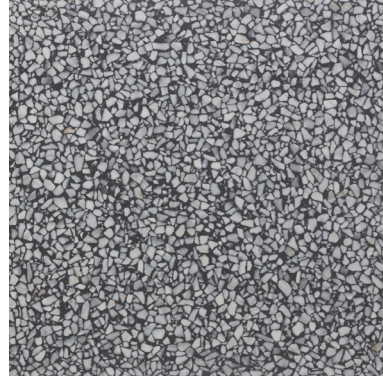

Dark Grey Honed



Black Honed

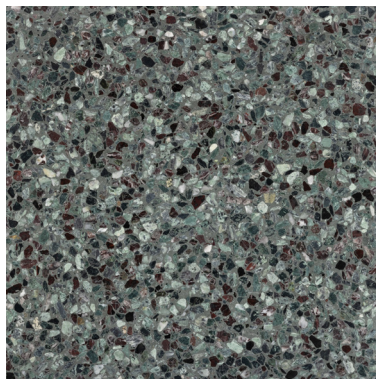

Green Honed

APPLICATIONS									ATTRIBUTES	VARIATION
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	DCOF (Honed Only)	V1 V2 V3 V4
Heavy Traffic Commercial ¹	All	Yes, including steam ²	Yes ³	Yes, non-freeze thaw	Yes, non-freeze thaw	No	Yes	Yes	0.55 0.57 0.56	

INSTALLATION/MAINTENANCE										TAILORED TO CUSTOMIZATION ⁶		
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT	FIELD	FINISH	MOSAIC
Ardex N23 Microtec Rapid Set ⁴	Ardex FG-C Microtec Unsanded ⁵	3/32" maximum	Ardex 8 + 9	Ardex SX	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	No	No	Optional	SADDLE		VANITY TOP
										WATERJET		CARPET CUTTING

NOTES	FIELD TILE
¹ Consult TCNA Handbook for Ceramic, Glass, and Stone Tile Installation – Natural Stone Installation Methods. Floor installations deflection not to exceed L/720. Concrete substrate, mortar bed or self-leveling compound recommended. Wood-frame construction, mortar bed or 2-layers of Plywood w/CBU recommended. Use of a membrane (waterproofing and/or crack isolation) is optional. ² Polished finish may dull over time in a steam shower. ³ For linear drains only. ⁴ Alternate mortar - Mapei Granirapid 2-Part System ⁵ Alternate grout - Mapei Keracolor unsanded or Mapei Ultracolor Plus FA This is a cement product, open the crate only when ready to immediately install. Always reseal the remaining tiles in the crate in the plastic wrap. Returns will not be accepted on improperly stored material. Please contact your sales associate for additional colorways. ⁶ Cannot be cut smaller than 2" x 2" (5cm x 5cm).	16" x 16" x 5/8" Honed or Polished